REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-2501	C
1	GPT-40KE		12-29-60		

A – 1/4 x 3/4 SLOT 1 REQ

B –

C – 13/64 (.203) DIA 2 REQ

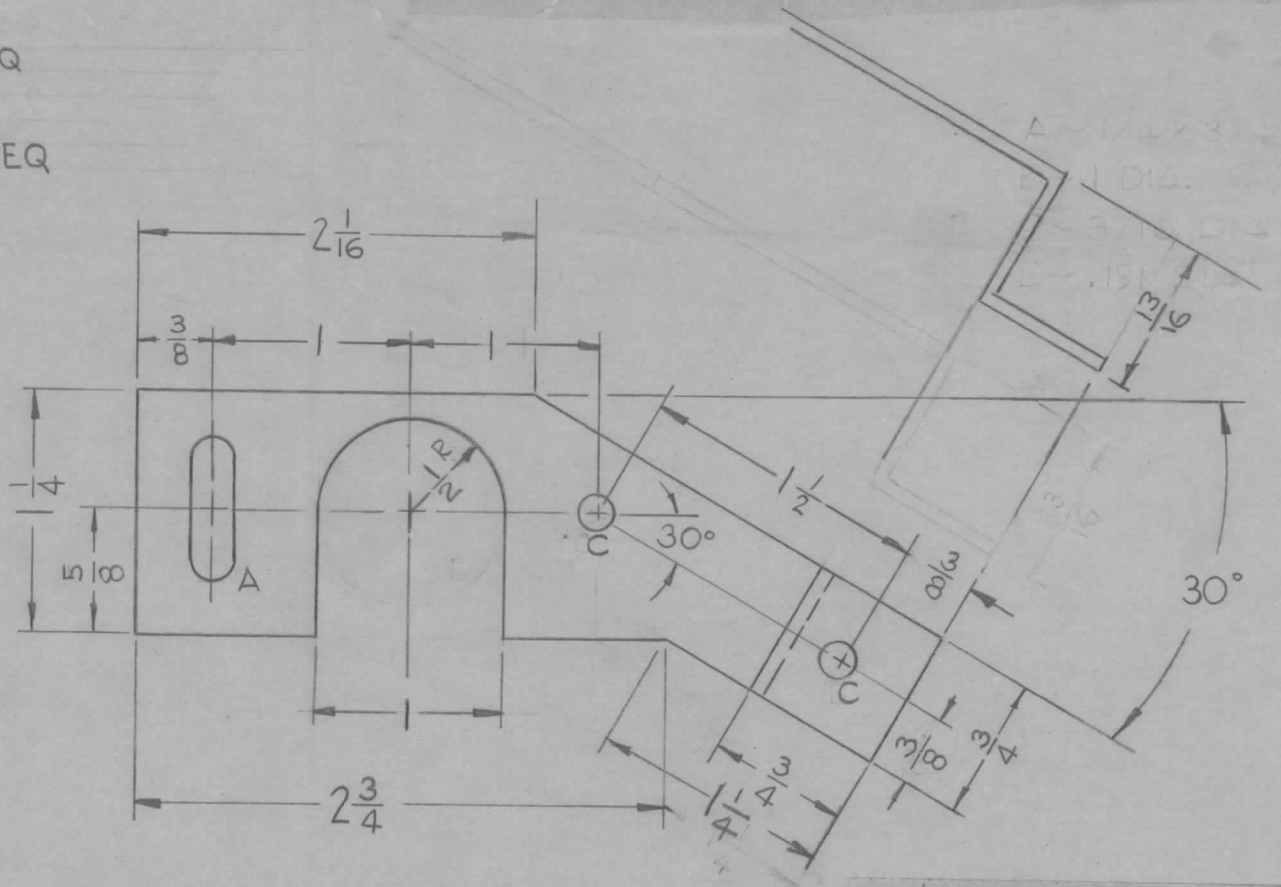

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30′

CUT HERE GUARANTEED 2-66

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	2	"C" HOLE WAS .191 D. REQ WAS 1	4-26-63	8874	EC	JWZ	
	1	DELETED "B" HOLE 3/16 DIA					
B	1	STOCK SIZE WAS .081	8-23-62	7128	SG		
A	1	1" Slot, 1/2 R. Was 1" Dia Hole	12-26-61	6092	L.L.		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		1/8 THK.		

STOCK SIZE

ALUMINUM

MATERIAL

5052-H32

TYPE & TEMPER

HEAT TREAT. SPEC.

IRIDITE S404

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

BRACKET, IDLER GEAR ADJUST

DRAWN	CHECKED	FINAL APPROVAL
R. UZZO		
ELEC. DES. APP	MECH. DES. APP	MS-2501 C

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: FULL, DO NOT SCALE

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES