
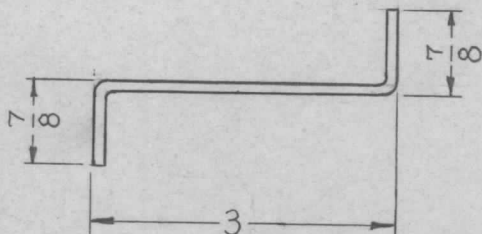


REQ. PER UNIT	USED ON			MS-3276 ○
	MODEL	ASS'Y. NO.	DATE	
2	TR-179	A-3143	2-25-64	

METAL STAMP TMC PART NO.  
1/8 HIGH GOTHIC.

HOLES:  
7/32 DIA. (4REQ.)

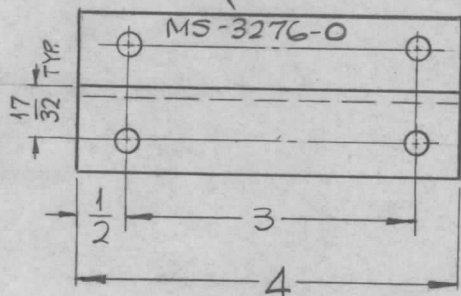

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
○	ORIGINAL RELEASE FOR PRODUCTION	4-6-64	2				1/8 THICK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, XFMR MTG.	
○	RE-DESIGNED & REDRAWN	2-25-64	1				ALUMINUM					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE					
							1/2" = 1"					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES			CODE	5052-H32		SRG	aa	RJC
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
							S404 YELLOW IRIDITE		RB	2/2/64	MS-3276 ○	
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			