


MS-3292 0

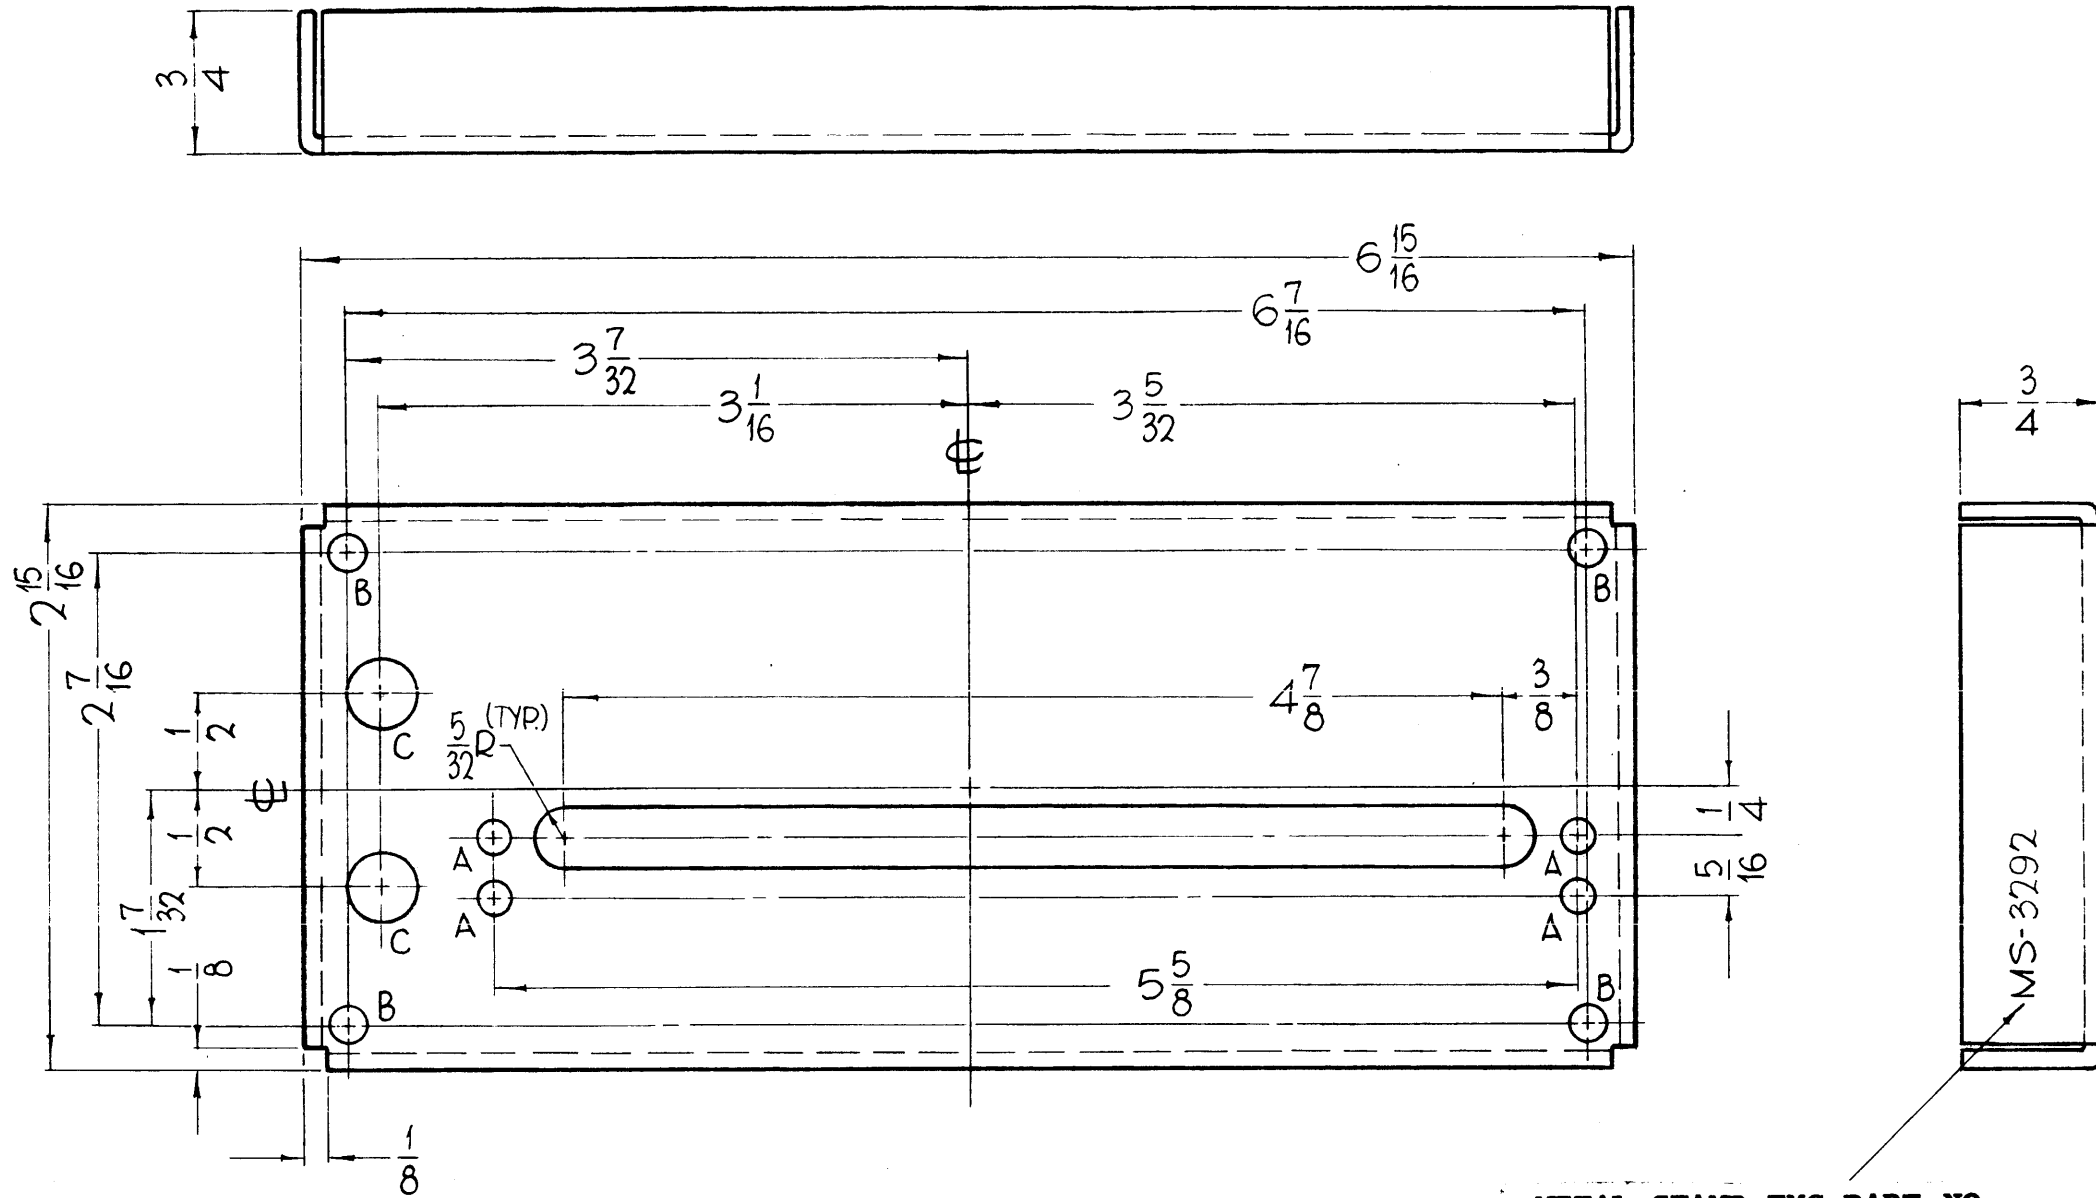

HOLES	REQ.
A - 11/64 DIA.	4
B - 13/64 DIA.	2
C - 3/8 DIA.	2

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC.
WITH LATEST REVISION LETTER

REF. TMC DWG. NO. LD-1266

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90°.
 3. REMOVE ALL BURRS AND SHARP EDGES.

REQ.	ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
		.081 THICK		THE TECHNICAL MATERIEL CORP.	
		STOCK SIZE		MAMARONECK, NEW YORK	
		ALUMINUM		CHASSIS, COMPONENT MTG.	
		MATERIAL			
	5052 H-32		John C. Biele	QA	RE
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKER	FINAL APPROVAL
	S404-IRIDITE, 14-2 AL-COAT		OB	me 7/9/64	MS-3292 0
	FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0	ORIGINAL RELEASE FOR PRODUCTION	5/28/64	0	A.M.		

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	GPT-200K		AX-392	6-27-63

UNLESS OTHERWISE SPECIFIED:		SCALE:	
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.	
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°		REMOVE ALL BURRS AND SHARP EDGES	