REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-3328	0
2	GPT-200K AX-395	A-3163	8-23-63		

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC.

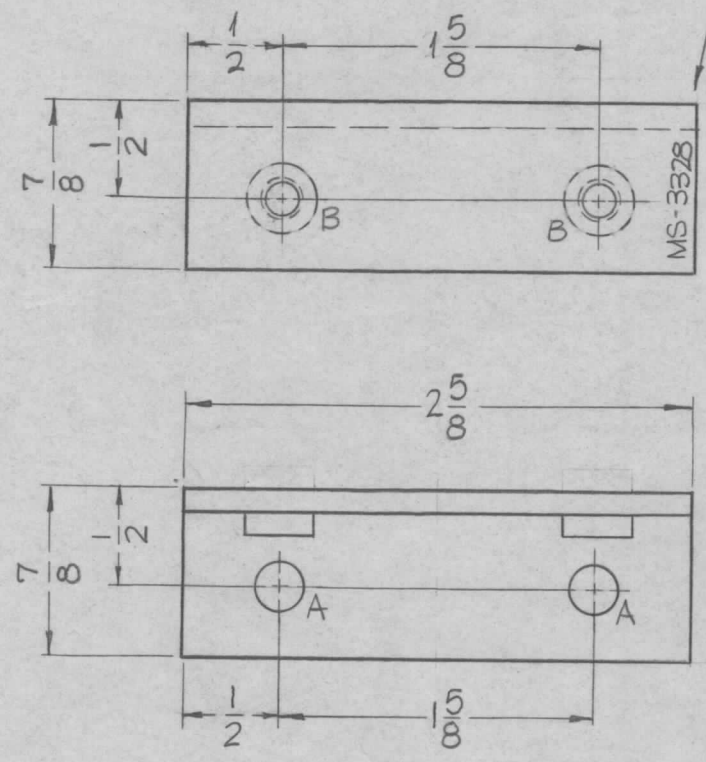

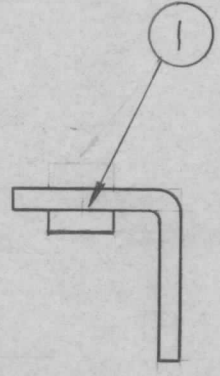

HOLES	DESCRIPTION	REQ.
A	15/64 DIA.	2
B	.221-.224 DIA.	2

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT-129-832-6	NUT ROUND, SWAGE TYPE	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0	ORIGINAL RELEASE	5.16.64		WB		

1/8 THICK — STOCK SIZE

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

S404 YELLOW IRIDITE — FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

BRACKET, SUPPORT COIL

DRAWN	CHECKED	FINAL APPROVAL
SRG	aa	RJC

ELEC. DES. APP.	MECH. DES. APP.	
	aa 4/1/64	MS-3328 0

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE 1" = 1"

CODE

TMC FORM 108-A