



REQ. PER UNIT	USED ON			MS-3339	0
	MODEL	ASS'Y. NO.	DATE		
1	GPT-200K	AX-395	1-8-64		

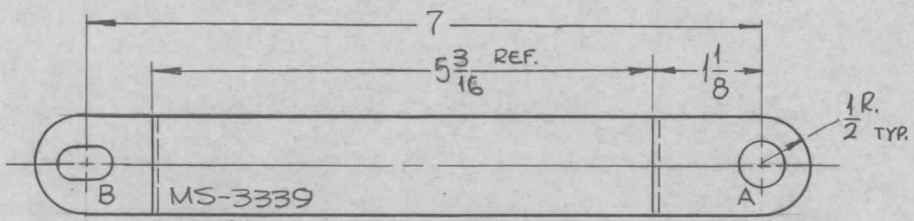


METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC AS SHOWN.

HOLES:
A - 7/16 DIA. 1REQ.



B-DETAIL
(1REQ.)

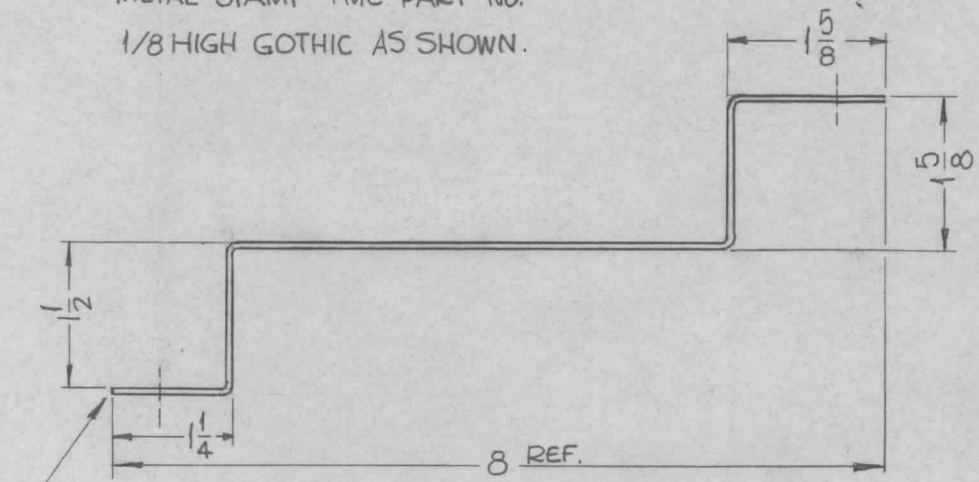

ROUND ALL EDGES 1/32 R.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90°.
 3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
0	ORIGINAL RELEASE	5.16.64		ASB			1/16 THICK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	STRAP, EMERGENCY COAX CABLE	
X 2	RE-DESIGNED & REDRAWN	1-8-64		SRG			COPPER					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1/2" = 1"			MATERIAL		SRG	dd	RAC	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
							S-245 SILVER PLATE		SRG	1/21/64	MS-3339 0	
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		