



HOLE	DESCRIPTION	REQ.
A	.120 DIA., CSK 82° TO .230.	1
B	.144 DIA., CSK 82° TO .284	7
C	13/64 DIA.	2
D	.194 -.191 DIA.	3
E	SEE DETAIL	4
F	1" DIA.	7
G	.250 -.253 DIA.	6

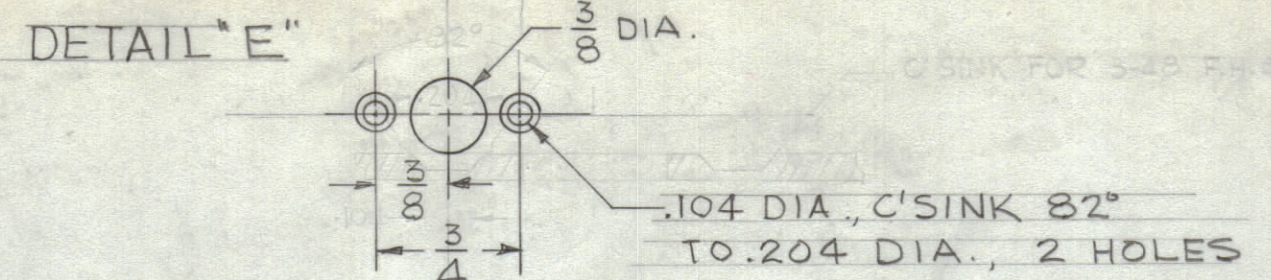

REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	O	ORIGINAL RELEASE FOR PRODUCTION	4-20-64	O	A.M.	@	
	A	*A*HOLE WAS 1/8 DIA.	7/2/65	14-386	D.V.V.	QUT	

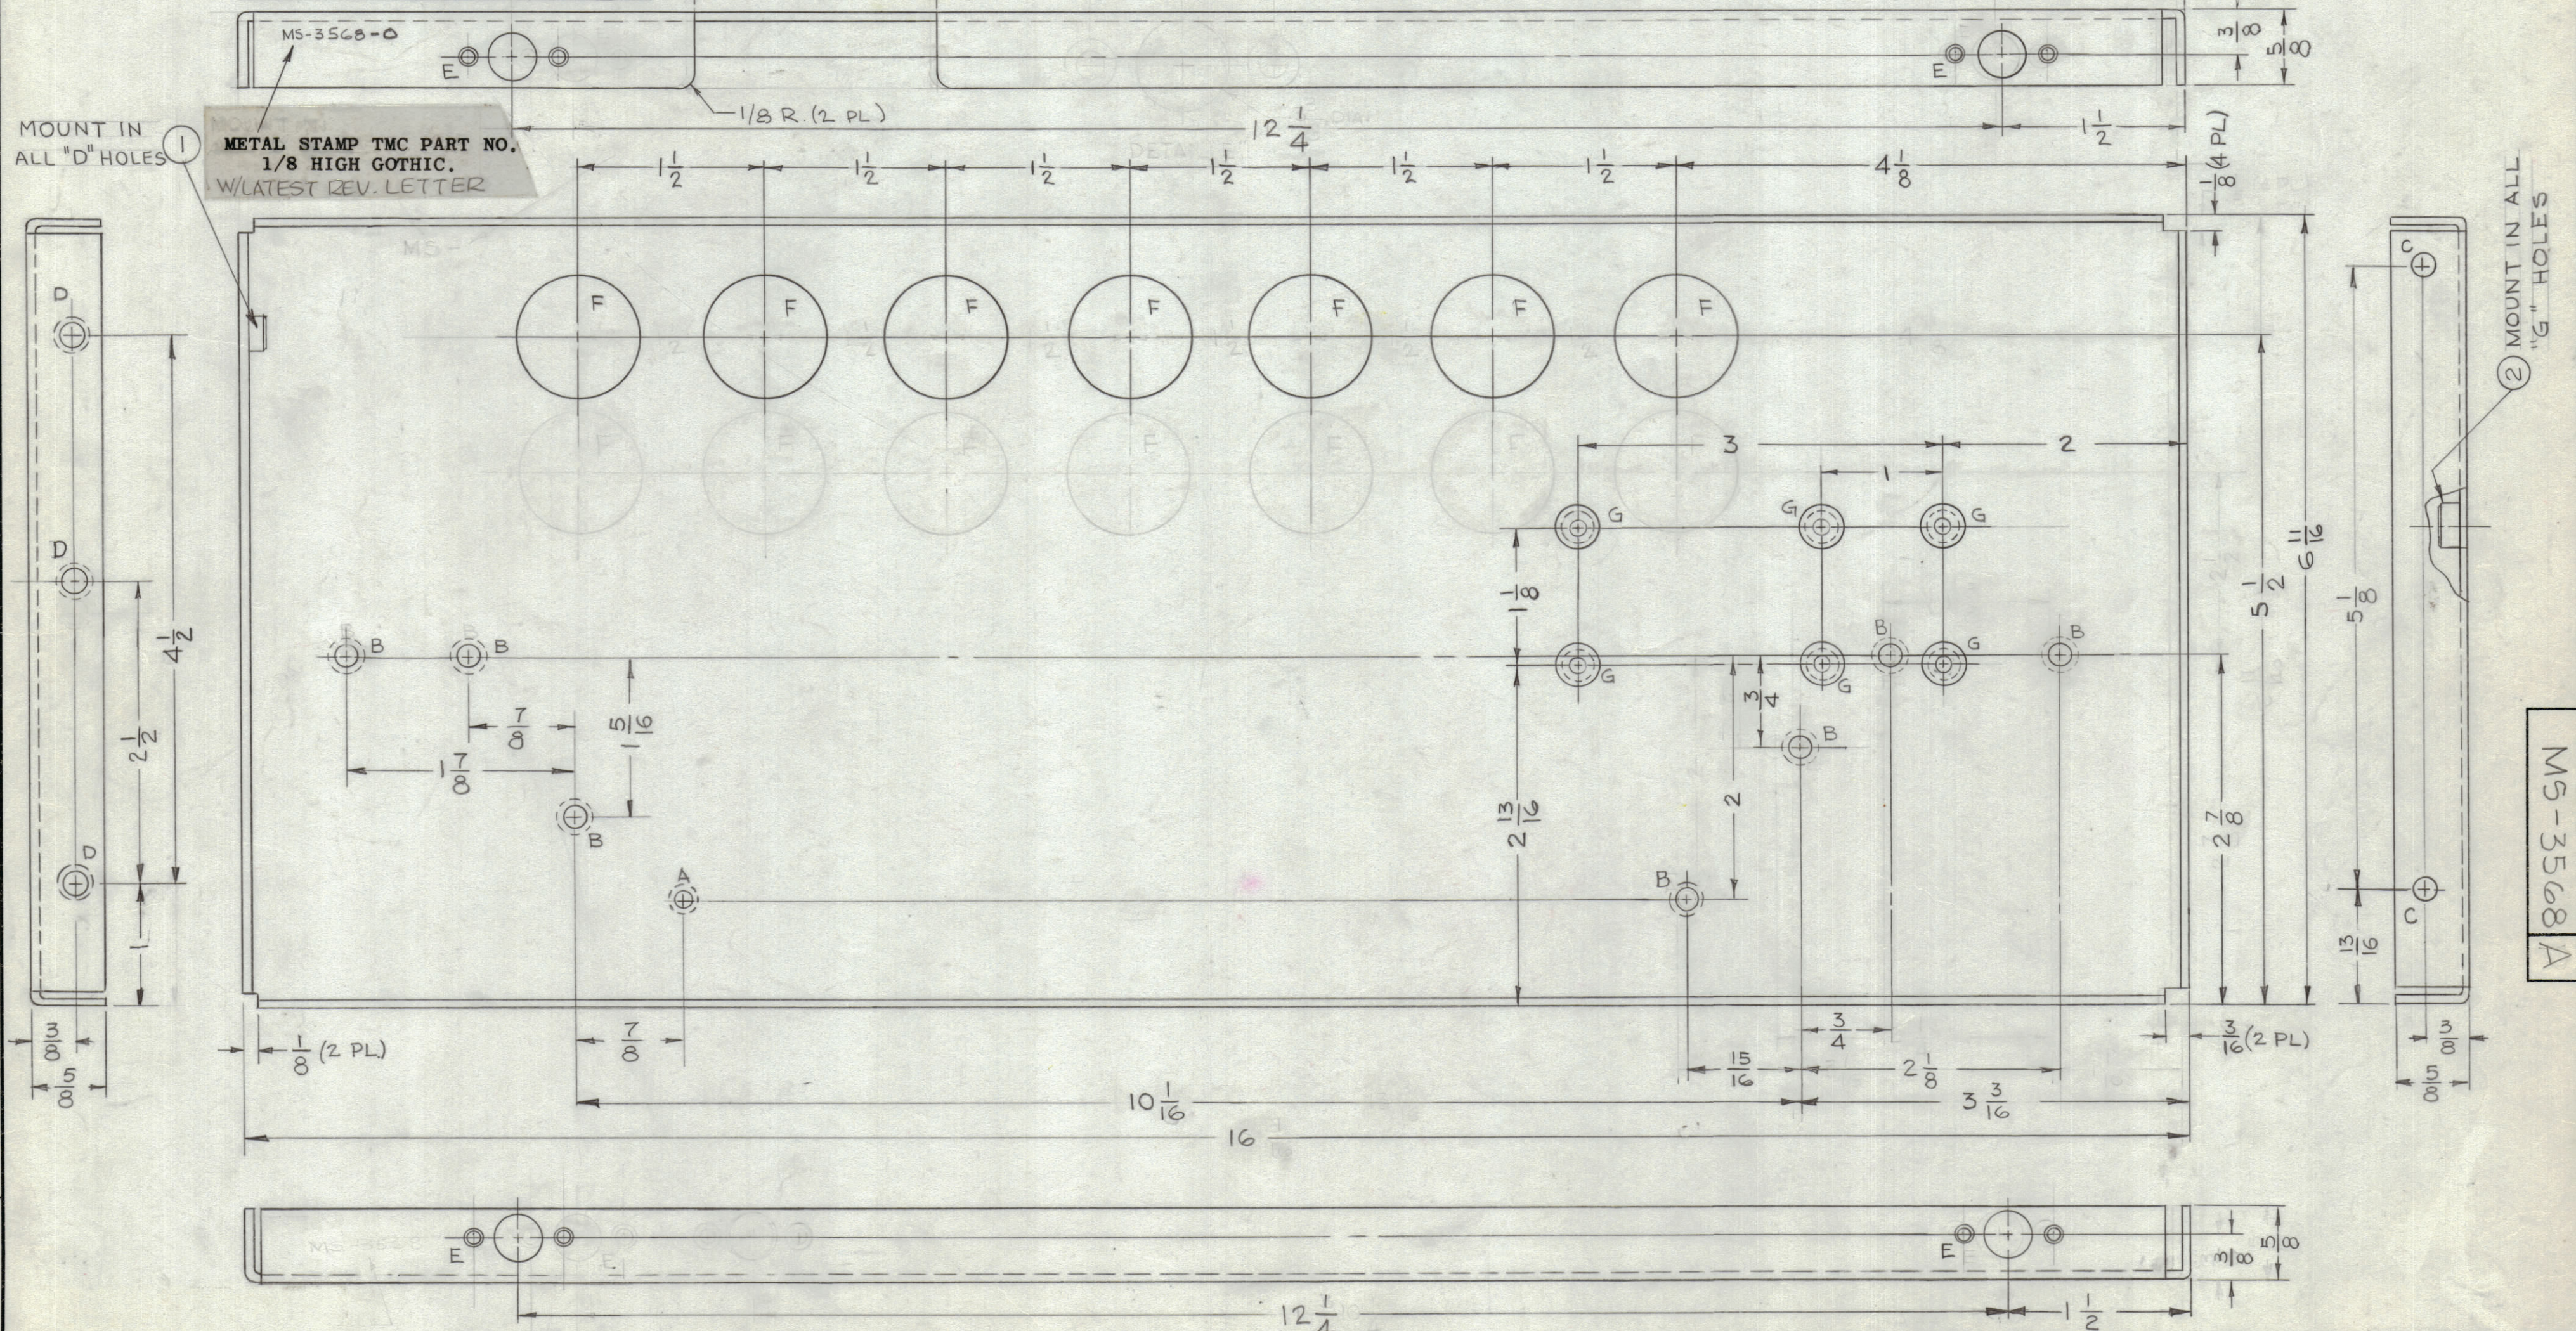

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90°.
 3. REMOVE ALL BURRS AND SHARP EDGES.
 4. MOUNT INSERTS AFTER FINISHING.

MSA-1		
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
6	2	NT-129-1032-4	NUT, ROUND, SWAGE TYPE	
3	1	NT-129-632-4	NUT, ROUND, SWAGE TYPE	D

T. AALTONEN LIST OF MATERIAL

MATERIAL	.064 THK. ALUMINUM 5052-H 32	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH	5404 IRIDIUM 14-2 AL-COAT	TITLE SIDE PLATE, RIGHT	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN G.D.L.	DATE 8-15-62	FINAL APPROVAL	DATE 4/2/64
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES. M.R.C.	DATE 12/16/63
NOTES		MECH. DES. M.3	DATE 3-11-64	SHEET

MS-3568 A

MS-3568 A