

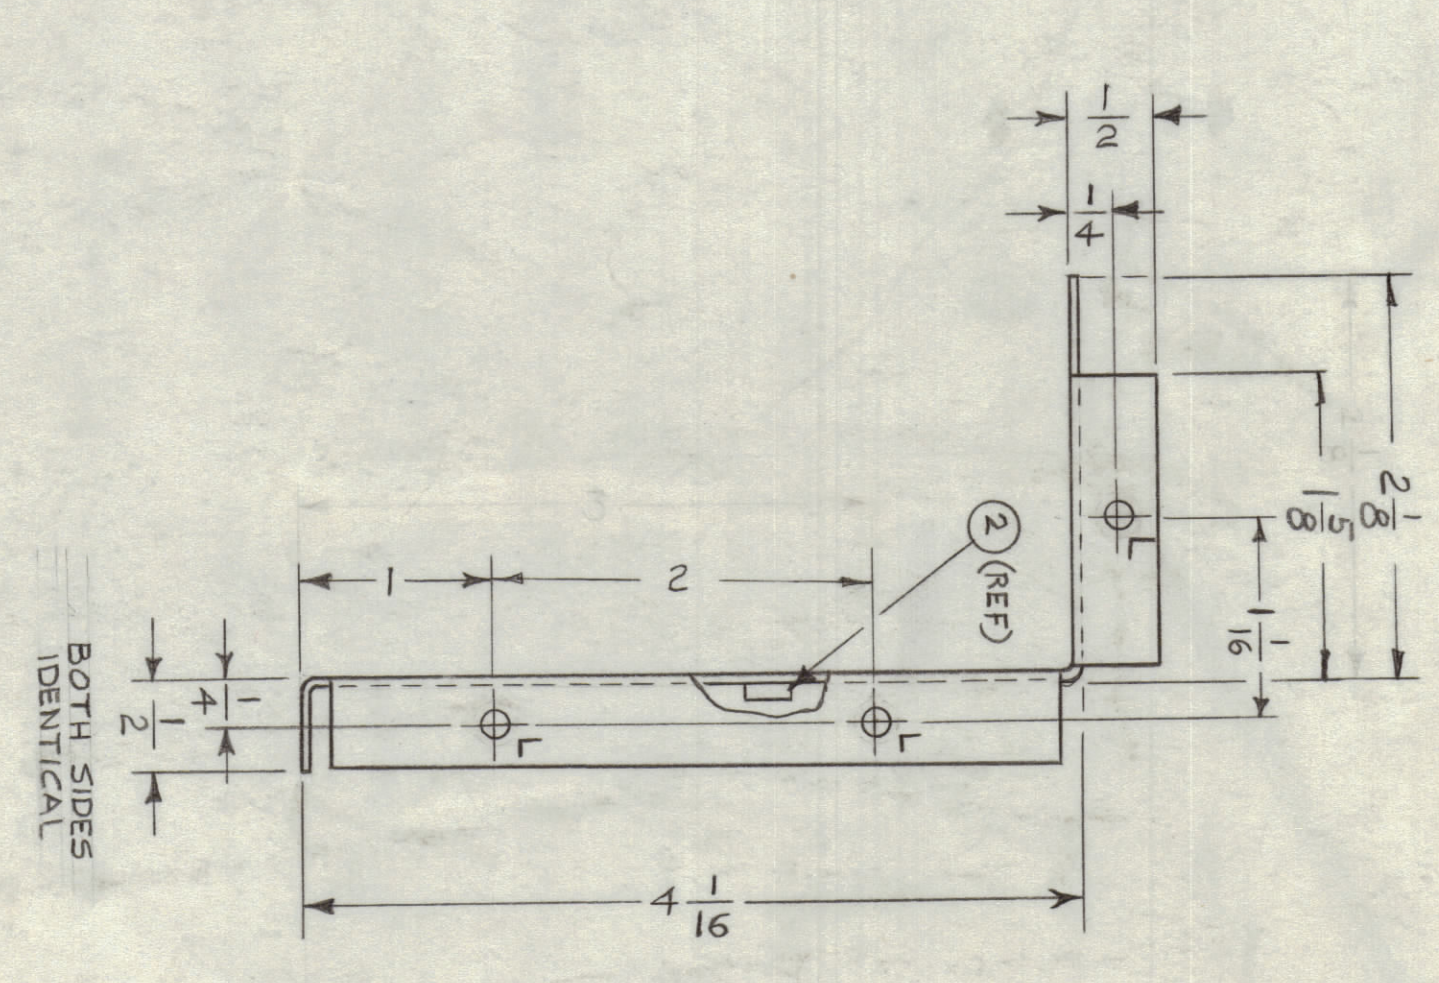
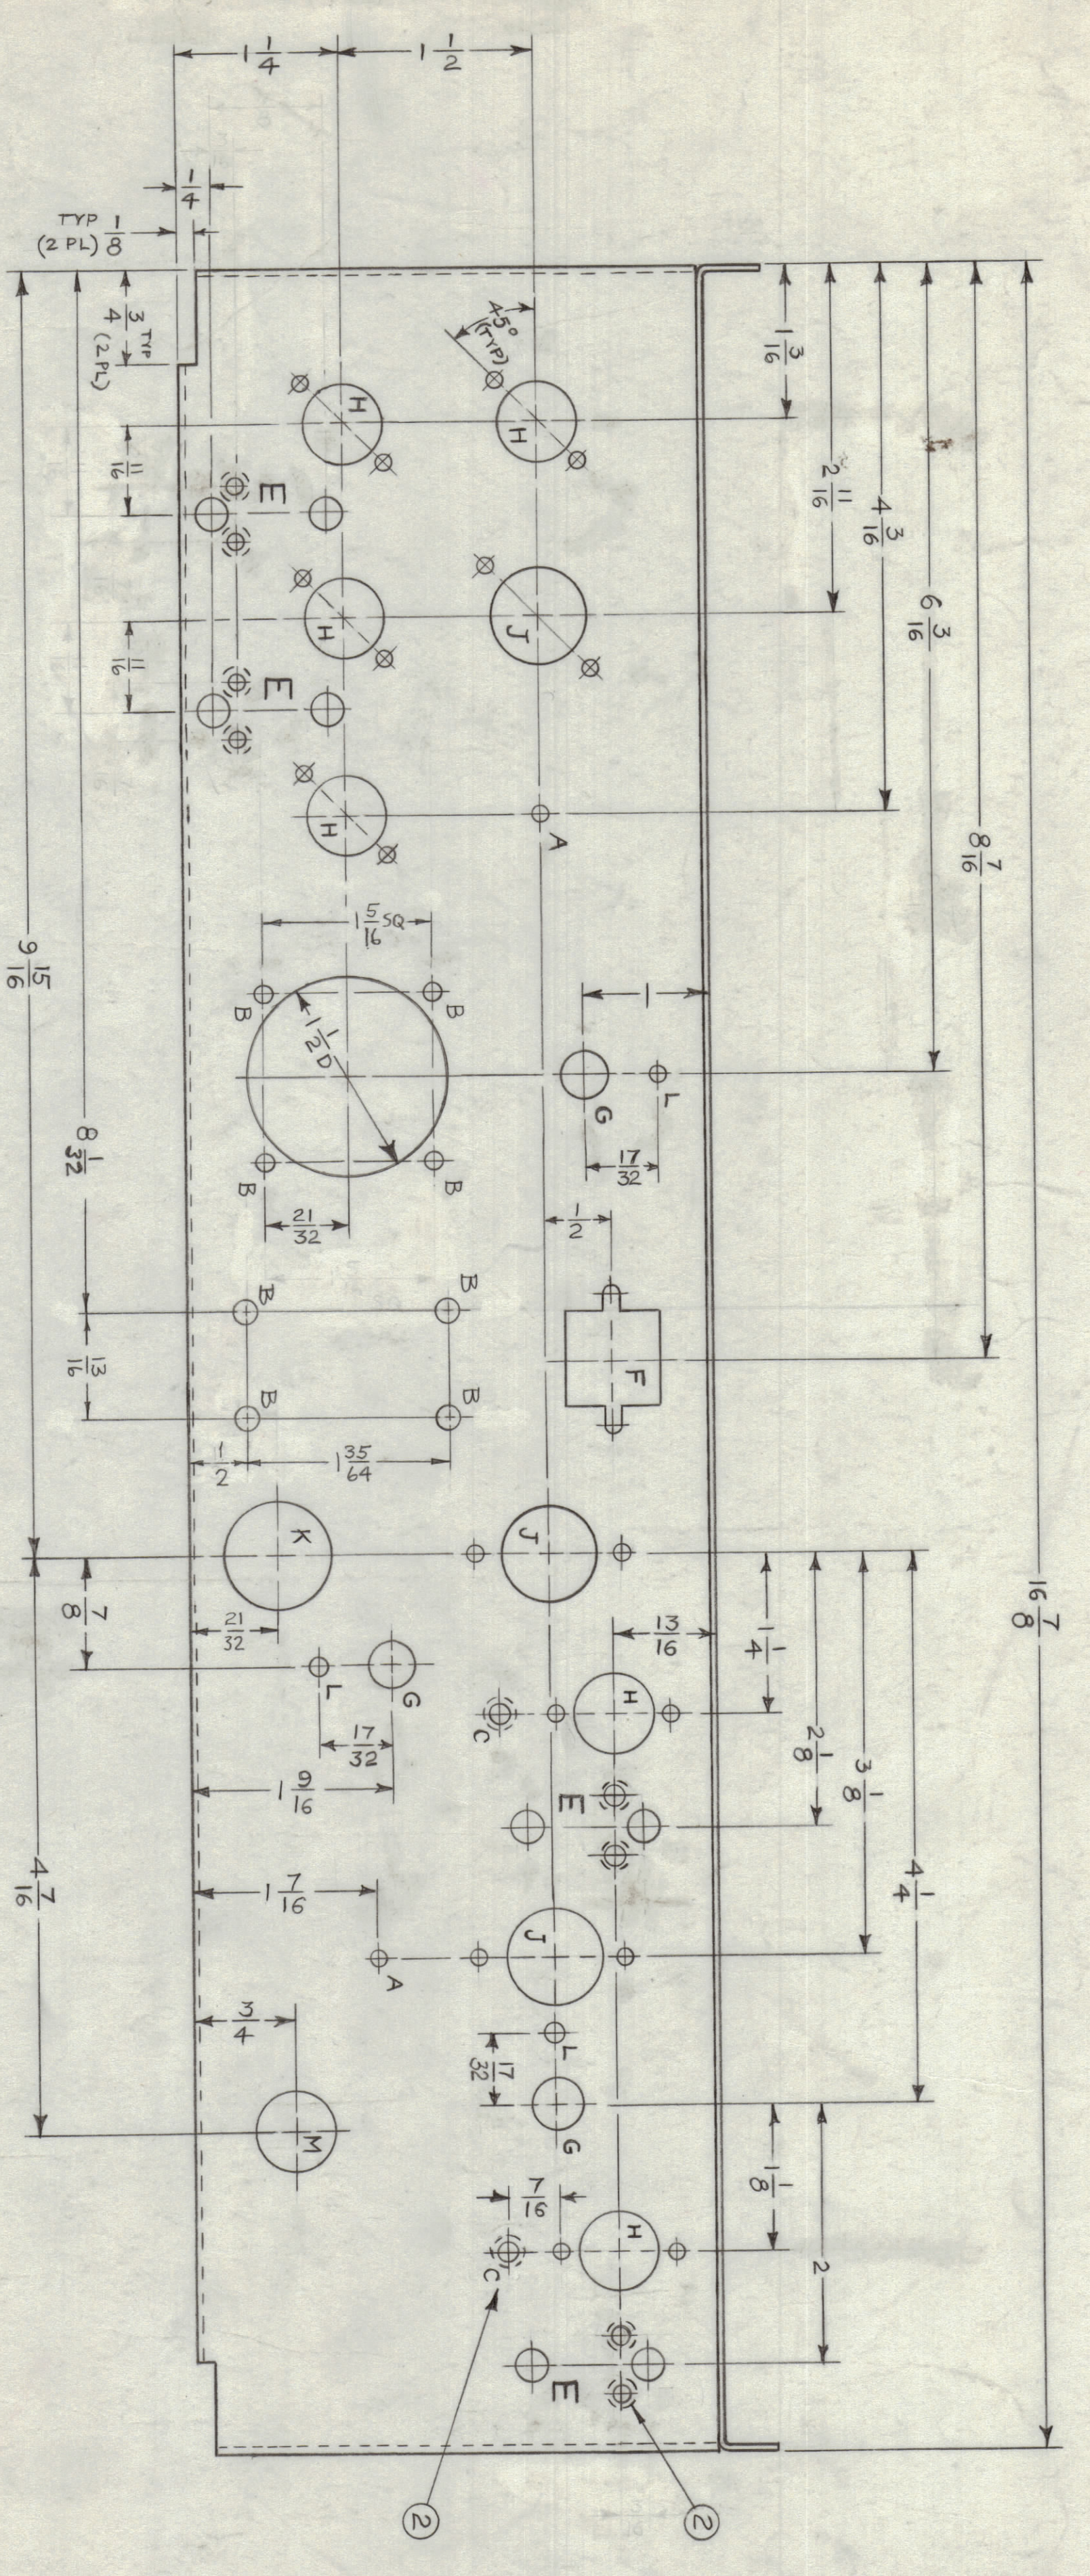


| REV | DATE | E.N. NO. | DRFT | CHKD | APPR |
|-----|------|----------|------|------|------|
| 0   |      |          | AM   |      |      |
| E7  |      | 42845    | 1945 | PF   |      |

| ZONE | SYM | DESCRIPTION                                 |
|------|-----|---|
| 0    |     | ORIGINAL RELEASE FOR PRODUCTION             |
| A    |     | 4" HOLES ADDED; 1/16" SQ ADDED TO 1/4" DIA. |

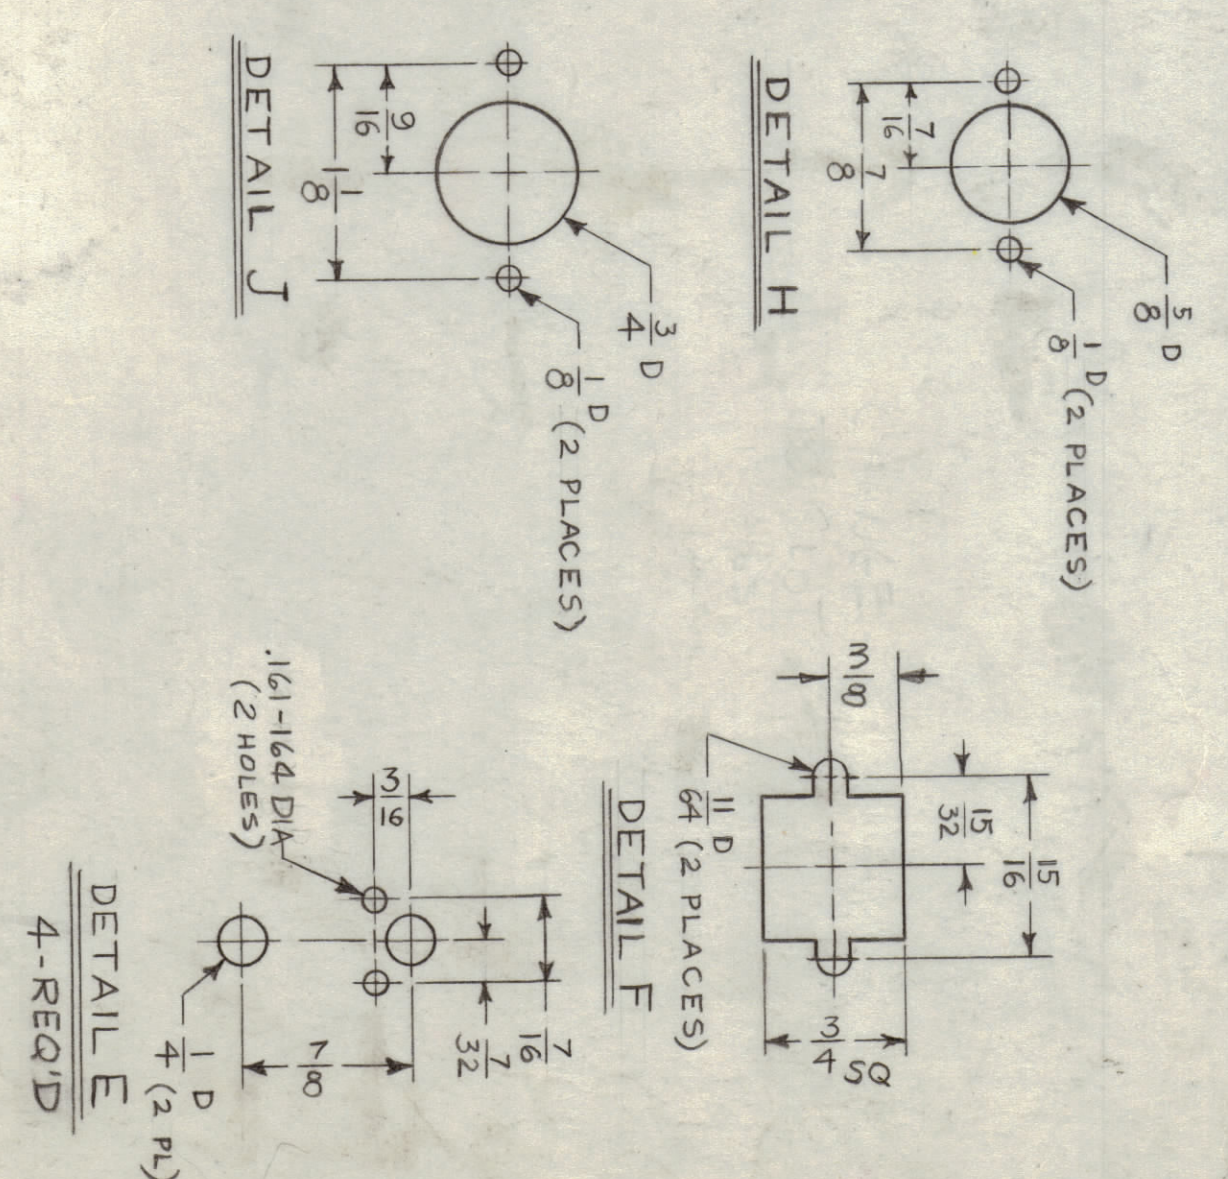

BOTH SIDES IDENTICAL

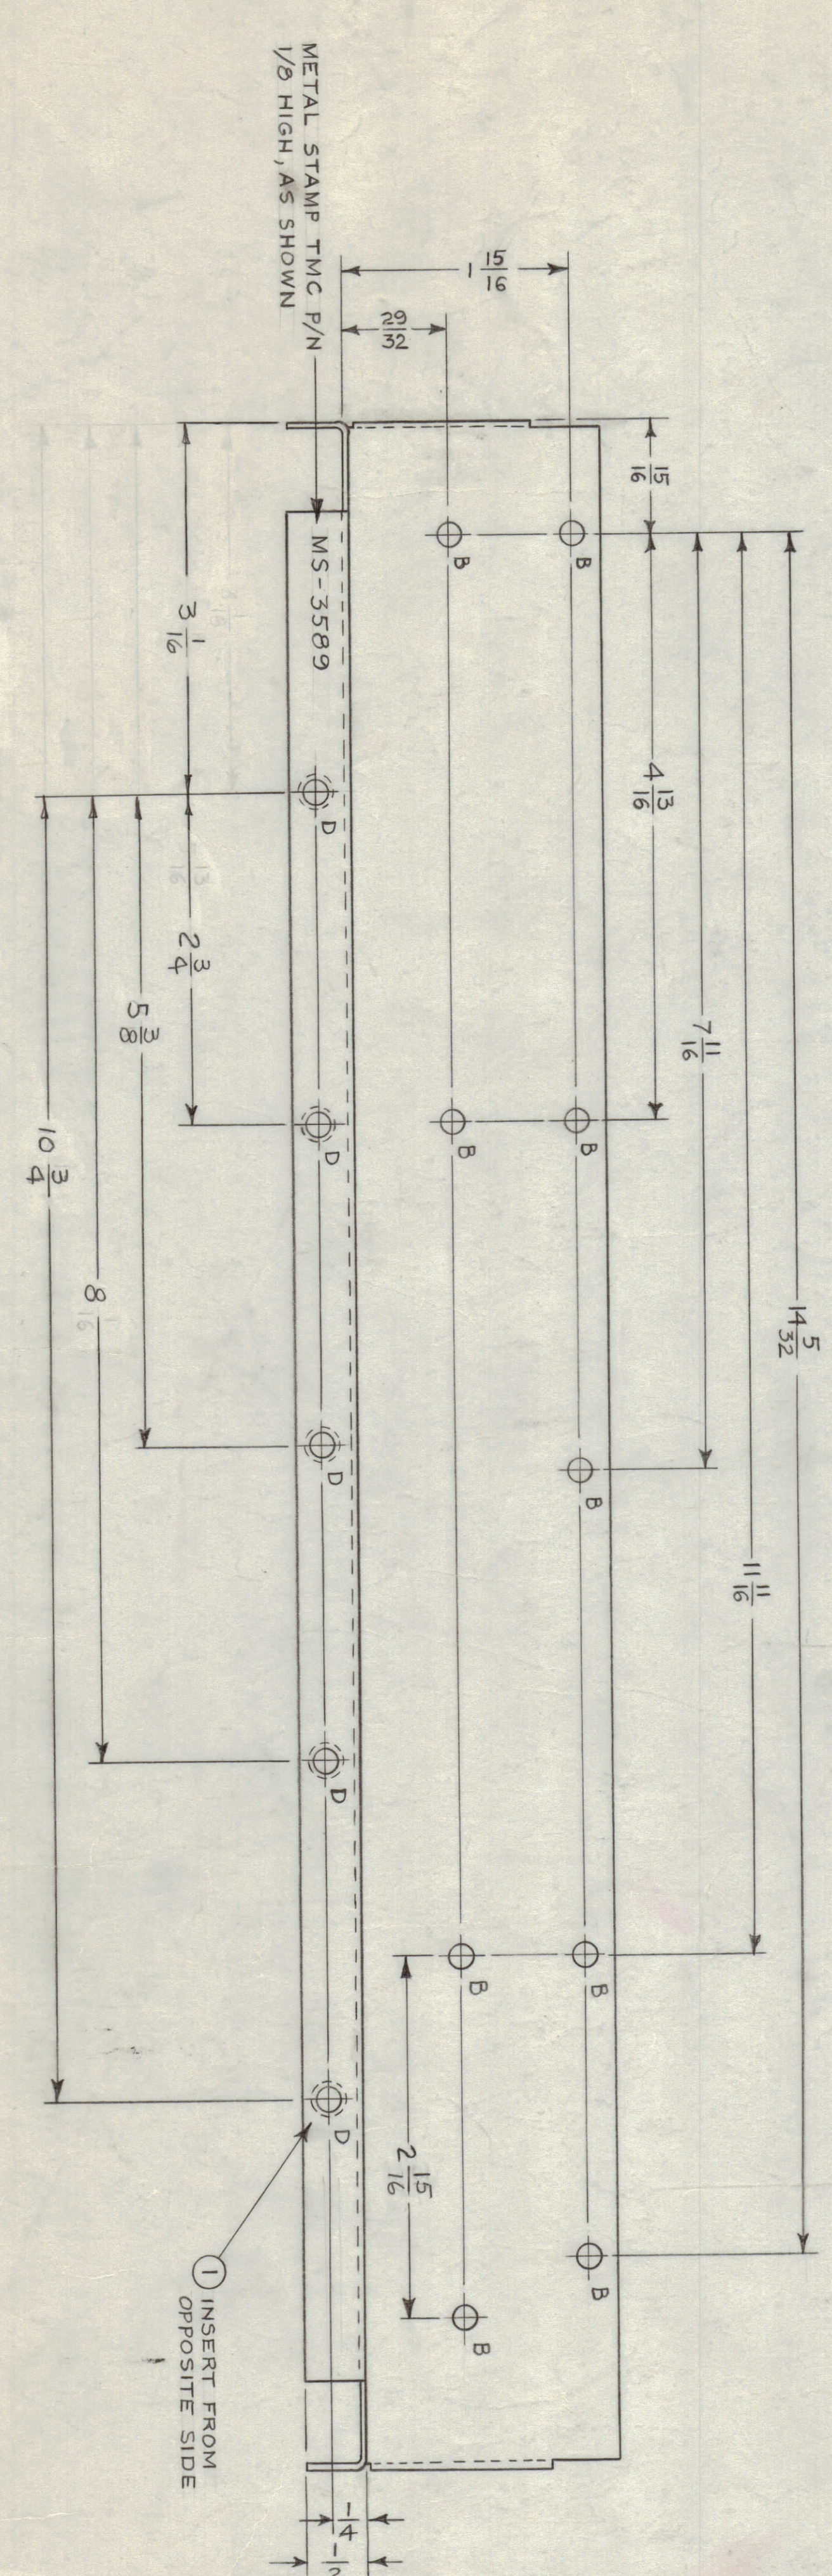

| HOLE | DESCRIPTION   | REQD |
|------|---------------|------|
| A    | 1/8 DIA       | 2    |
| B    | 11/64 DIA     | 17   |
| C    | .161-.164 DIA | 2    |
| D    | .191-.194 DIA | 5    |
| E    | SEE DETAIL    | 4    |
| F    | SEE DETAIL    | 1    |
| G    | 3/8 DIA       | 3    |
| H    | SEE DETAIL    | 6    |
| J    | SEE DETAIL    | 3    |
| K    | 7/8 DIA       | 1    |
| L    | 5/32 DIA      | 9    |

| HOLE | DESCRIPTION | REQD |
|------|-------------|------|
| M    | 9/16 DIA.   | 1    |

UNLESS OTHERWISE SPECIFIED:  
 1. USE MATERIAL THICKNESS FOR MAXIMUM RADIIUS ON ALL BENDS.  
 2. ALL ANGULAR BENDS 90°.  
 3. REMOVE ALL BURRS AND SHARP EDGES.  
 4. MOUNT INSERTS AFTER FINISHING.

| HOLE | DESCRIPTION   | REQD |
|------|---------------|------|
| A    | 1/8 DIA       | 2    |
| B    | 11/64 DIA     | 17   |
| C    | .161-.164 DIA | 2    |
| D    | .191-.194 DIA | 5    |
| E    | SEE DETAIL    | 4    |
| F    | SEE DETAIL    | 1    |
| G    | 3/8 DIA       | 3    |
| H    | SEE DETAIL    | 6    |
| J    | SEE DETAIL    | 3    |
| K    | 7/8 DIA       | 1    |
| L    | 5/32 DIA      | 9    |

| QTY/UNIT | SCALE | MODEL USED ON | ASBY. NO. |
|----------|-------|---------------|-----------|
| 1        | 1:1   | A             |           |

| REV | DATE | DESCRIPTION  | BY | CHKD | APPR |
|-----|------|--------------|----|------|------|
| 10  |      | NT-129-440-4 |    |      |      |
| 2   |      | NT-129-632-4 |    |      |      |
| 5   |      | NT-129-632-4 |    |      |      |

| RECD | ITEM | PART NUMBER | DESCRIPTION | SYMBOL |
|------|------|-------------|-------------|--------|
|      |      |             |             |        |

| MATERIAL                        | TITLE  |
|---------------------------------|--|
| .064 THICK<br>5052-H32 ALUMINUM | THE TECHNICAL MATERIEL CORP.<br>MAMARONECK, NEW YORK |

| FINISH                   | DATE | APPROVAL |
|--------------------------|------|----------|
| YEL IRIDITE 14-2 AL COAT |      |          |

| UNLESS OTHERWISE SPECIFIED   | UNLESS OTHERWISE SPECIFIED              |
|--|---|
| DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | DRAWING IS TO BE PRINTED ON 11x17 SHEET |
| FRACTIONS ARE TO BE SHOWN AS MIXED NUMBERS                                 | DATE                                    |
| TOLERANCES ARE AS FOLLOWS  | REV. DATE                               |
| ±.005  |   |
| ±.01   |   |
| ±.015  |   |
| ±.02   |   |
| ±.03   |   |
| ±.04   |   |
| ±.05   |   |
| ±.06   |   |
| ±.07   |   |
| ±.08   |   |
| ±.09   |   |
| ±.10   |   |
| ±.15   |   |
| ±.20   |   |
| ±.25   |   |
| ±.30   |   |
| ±.35   |   |
| ±.40   |   |
| ±.45   |   |
| ±.50   |   |
| ±.55   |   |
| ±.60   |   |
| ±.65   |   |
| ±.70   |   |
| ±.75   |   |
| ±.80   |   |
| ±.85   |   |
| ±.90   |   |
| ±.95   |   |
| ±1.00  |   |
| ±1.05  |   |
| ±1.10  |   |
| ±1.15  |   |
| ±1.20  |   |
| ±1.25  |   |
| ±1.30  |   |
| ±1.35  |   |
| ±1.40  |   |
| ±1.45  |   |
| ±1.50  |   |
| ±1.55  |   |
| ±1.60  |   |
| ±1.65  |   |
| ±1.70  |   |
| ±1.75  |   |
| ±1.80  |   |
| ±1.85  |   |
| ±1.90  |   |
| ±1.95  |   |
| ±2.00  |   |
| ±2.05  |   |
| ±2.10  |   |
| ±2.15  |   |
| ±2.20  |   |
| ±2.25  |   |
| ±2.30  |   |
| ±2.35  |   |
| ±2.40  |   |
| ±2.45  |   |
| ±2.50  |   |
| ±2.55  |   |
| ±2.60  |   |
| ±2.65  |   |
| ±2.70  |   |
| ±2.75  |   |
| ±2.80  |   |
| ±2.85  |   |
| ±2.90  |   |
| ±2.95  |   |
| ±3.00  |   |
| ±3.05  |   |
| ±3.10  |   |
| ±3.15  |   |
| ±3.20  |   |
| ±3.25  |   |
| ±3.30  |   |
| ±3.35  |   |
| ±3.40  |   |
| ±3.45  |   |
| ±3.50  |   |
| ±3.55  |   |
| ±3.60  |   |
| ±3.65  |   |
| ±3.70  |   |
| ±3.75  |   |
| ±3.80  |   |
| ±3.85  |   |
| ±3.90  |   |
| ±3.95  |   |
| ±4.00  |   |
| ±4.05  |   |
| ±4.10  |   |
| ±4.15  |   |
| ±4.20  |   |
| ±4.25  |   |
| ±4.30  |   |
| ±4.35  |   |
| ±4.40  |   |
| ±4.45  |   |
| ±4.50  |   |
| ±4.55  |   |
| ±4.60  |   |
| ±4.65  |   |
| ±4.70  |   |
| ±4.75  |   |
| ±4.80  |   |
| ±4.85  |   |
| ±4.90  |   |
| ±4.95  |   |
| ±5.00  |   |
| ±5.05  |   |
| ±5.10  |   |
| ±5.15  |   |
| ±5.20  |   |
| ±5.25  |   |
| ±5.30  |   |
| ±5.35  |   |
| ±5.40  |   |
| ±5.45  |   |
| ±5.50  |   |
| ±5.55  |   |
| ±5.60  |   |
| ±5.65  |   |
| ±5.70  |   |
| ±5.75  |   |
| ±5.80  |   |
| ±5.85  |   |
| ±5.90  |   |
| ±5.95  |   |
| ±6.00  |   |
| ±6.05  |   |
| ±6.10  |   |
| ±6.15  |   |
| ±6.20  |   |
| ±6.25  |   |
| ±6.30  |   |
| ±6.35  |   |
| ±6.40  |   |
| ±6.45  |   |
| ±6.50  |   |
| ±6.55  |   |
| ±6.60  |   |
| ±6.65  |   |
| ±6.70  |   |
| ±6.75  |   |
| ±6.80  |   |
| ±6.85  |   |
| ±6.90  |   |
| ±6.95  |   |
| ±7.00  |   |
| ±7.05  |   |
| ±7.10  |   |
| ±7.15  |   |
| ±7.20  |   |
| ±7.25  |   |
| ±7.30  |   |
| ±7.35  |   |
| ±7.40  |   |
| ±7.45  |   |
| ±7.50  |   |
| ±7.55  |   |
| ±7.60  |   |
| ±7.65  |   |
| ±7.70  |   |
| ±7.75  |   |
| ±7.80  |   |
| ±7.85  |   |
| ±7.90  |   |
| ±7.95  |   |
| ±8.00  |   |
| ±8.05  |   |
| ±8.10  |   |
| ±8.15  |   |
| ±8.20  |   |
| ±8.25  |   |
| ±8.30  |   |
| ±8.35  |   |
| ±8.40  |   |
| ±8.45  |   |
| ±8.50  |   |
| ±8.55  |   |
| ±8.60  |   |
| ±8.65  |   |
| ±8.70  |   |
| ±8.75  |   |
| ±8.80  |   |
| ±8.85  |   |
| ±8.90  |   |
| ±8.95  |   |
| ±9.00  |   |
| ±9.05  |   |
| ±9.10  |   |
| ±9.15  |   |
| ±9.20  |   |
| ±9.25  |   |
| ±9.30  |   |
| ±9.35  |   |
| ±9.40  |   |
| ±9.45  |   |
| ±9.50  |   |
| ±9.55  |   |
| ±9.60  |   |
| ±9.65  |   |
| ±9.70  |   |
| ±9.75  |   |
| ±9.80  |   |
| ±9.85  |   |
| ±9.90  |   |
| ±9.95  |   |
| ±10.00   |   |

REF: LD-1411

MS-35889 A