


HOLE	DESCRIPTION	REQD
A	.191-.194 DIA	3
B	9/64 DIA	3

REQ. PER UNIT	USED ON		MS-3633	○
	MODEL	DATE		
2	LPP-4	10-15-63		

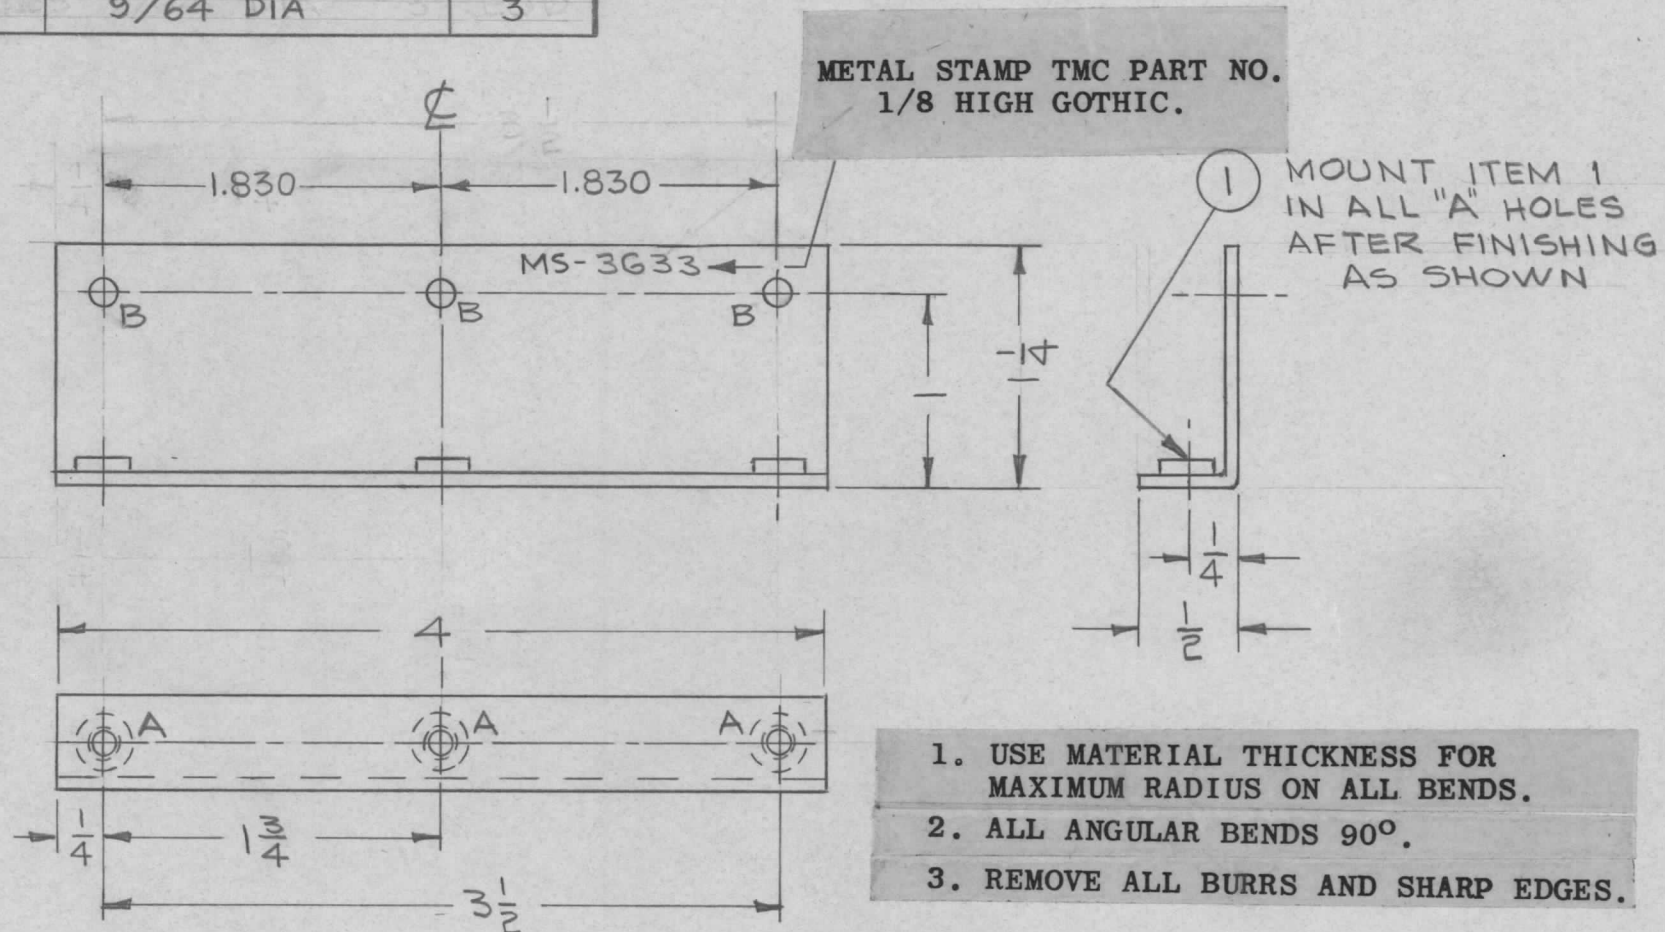

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
							3 1	NT-129-632-4	NUT, ROUND, SWAGE TYPE	A
								.064 THK	THE TECHNICAL MATERIEL CORP.	
								ALUMINUM	MAMARONECK. NEW YORK	
									BRACKET,	
									TERMINAL BOARD	
								5052-H32	JAB @ 3-10-64	
								S-404 YEL IRIDITE	MS-3633	○

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND INCLUDE  
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS  
.X ± .05  
.XX ± .01  
.XXX ± .005

SCALE  
1:1

TOLERANCES  
FRACTIONS  
± 1/64  
ANGLES  
± 0° 30'

CODE  
A

TYPE & TEMPER  
HEAT TREAT. SPEC.  
DRAWN  
CHECKED  
FINAL APPROVAL

ELEC. DES. APP.  
MECH. DES. APP.