
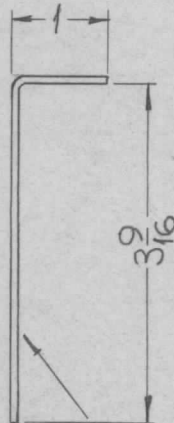


REQ. PER UNIT	USED ON			MS-3641	0
	MODEL	ASS'Y. NO.	DATE		
1	GPT-200K (AX-395)	A-3478	12-4-63		

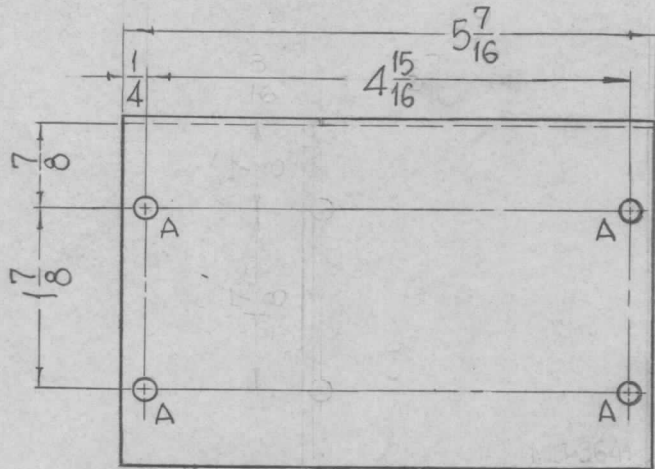

HOLES~  
A- 11/64 DIA. — 4REQ.

METAL STAMP TMC PART NO.  
1/8 HIGH GOTHIC, ON REAR

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90°.
  3. REMOVE ALL BURRS AND SHARP EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL		
							.064 THICK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
							STOCK SIZE						
○	ORIGINAL RELEASE FOR PRODUCTION	3/23/64					ALUMINUM			COVER FRONT, SHORTING RELAY			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1/2" = 1"				5052-H32		SRG	aa qrb	RDC 3/23/64		
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A				5-404 YELLOW IRIDITE		23 LB	aw 2/2/64	MS-3641	0
	TOLERANCES						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.			