HOLE	DESCRIPTION	REQ.
A	7/32 DIA.	2
B	11/32 DIA.	2

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
	GPT40K( )4 (AX510)	A3424	12-28-63

MS-3670 0

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL SHARP EDGES.

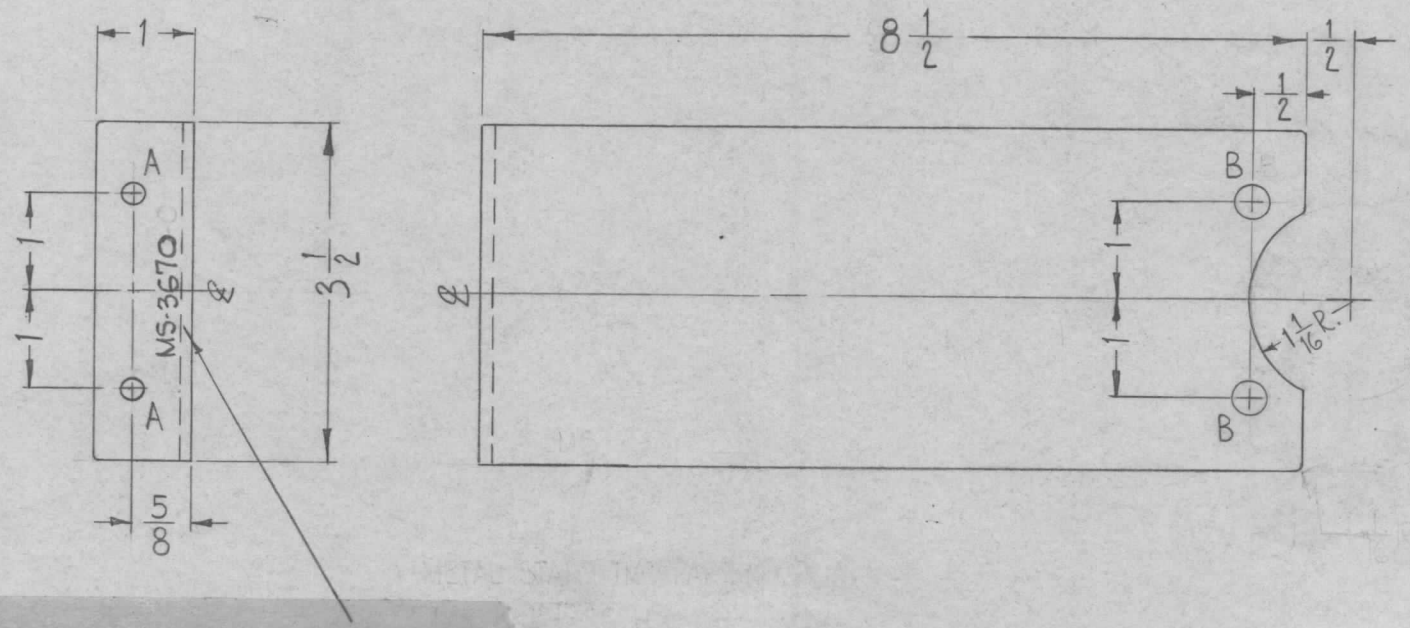

METAL STAMP TMC PART NO.
& LATEST REV.
1/8 HIGH, GOTHIC

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0	ORIGINAL RELEASE FOR PRODUCTION	5/11/64				

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ±.05 .XX ±.01 .XXX ±.005 — TOLERANCES — FRACTIONS ± 1/64 ANGLES ± 0° 30′

SCALE 2" = 1"

CODE A

REQ.	ITEM	PART NO.
1/8 THK		
STOCK SIZE		
ALUMINUM		
MATERIAL		
5052-H32		
TYPE & TEMPER	HEAT TREAT. SPEC.	
S404 YELLOW IRIDITE		
FINISH & SPEC. NO.		

F. BUDETTI — DESCRIPTION — SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BRACKET, SUPPORT

DRAWN	CHECKED	FINAL APPROVAL
W.A. FRANCO	JCB	RJC
ELEC. DES. APP.	MECH. DES. APP.	
	2/25/64	

MS-3670 0

TMC FORM 108-A