


REQ. PER UNIT	USED ON			MS-3672 0
	MODEL	ASS'Y. NO.	DATE	
1	GPT-200K (AX-395)	A-3258	1-7-64	

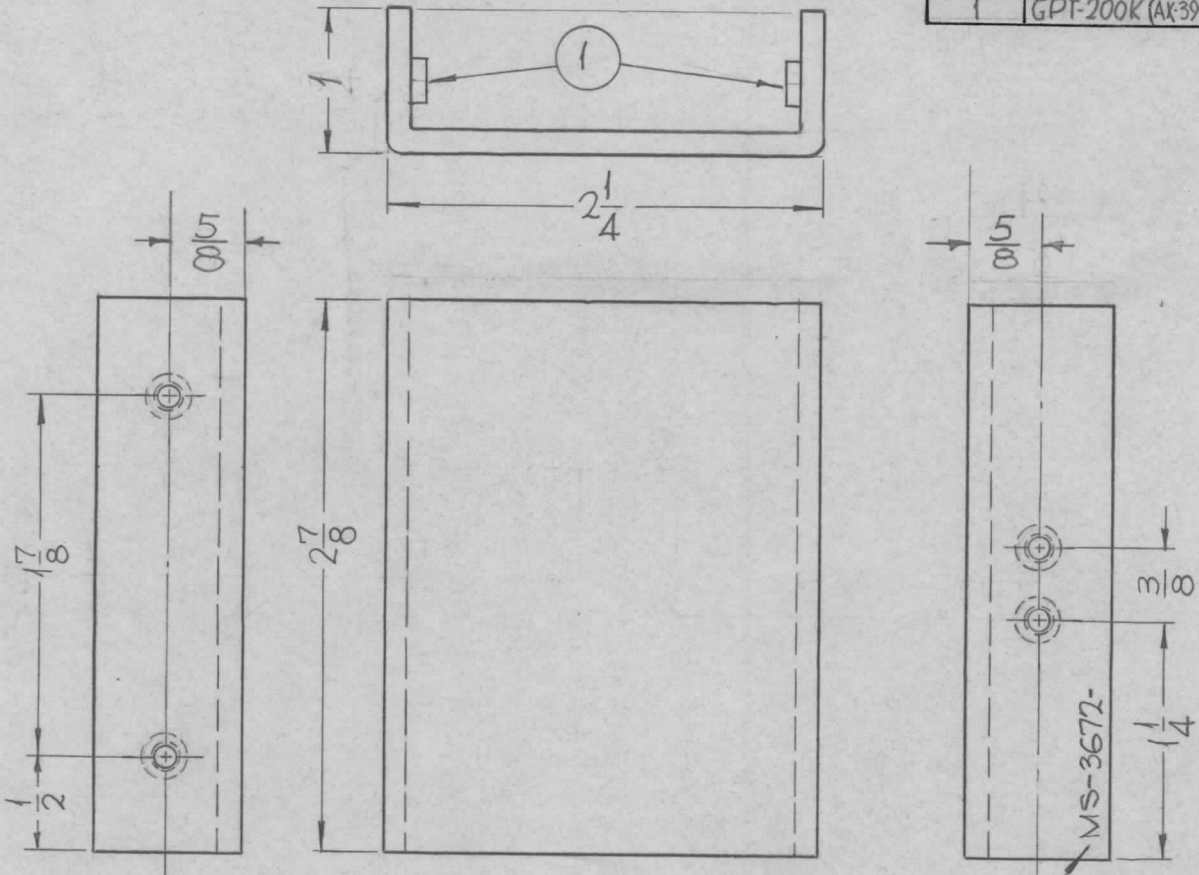

HOLES:  
.221-.224 DIA. (4REQ.)

METAL STAMP TMC PART NO.  
W/LATEST REV. LETTER  
1/8 HIGH GOTHIC.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90°.
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT INSERTS AFTER FINISHING.

4	1	NT-129-832-6	NUT, ROUND, SWAGE TYPE		
REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION		SYMBOL
		1/8 THICK	THE TECHNICAL MATERIEL CORP.		
		STOCK SIZE	MAMARONECK, NEW YORK		
0	ORIG. RELEASE FOR PROD.	5-6-64	SRG	BRACKET, SPRING SUPPORT	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1" = 1"		
DECIMALS	TOLERANCES	FRACTIONS	CODE	5052-H32	
.X ± .05		± 1/64	A	TYPE & TEMPER	HEAT TREAT. SPEC.
.XX ± .01		ANGLES		S404 YELLOW IRIDITE	
.XXX ± .005		± 0° 30'		FINISH & SPEC. NO.	
				SRG	aa
				DRAWN	CHECKED
				MS-3672 0	FINAL APPROVAL
				ELEC. DES. APP.	MECH. DES. APP.