


REQ. PER UNIT	USED ON		MS-3714 0
	MODEL	DATE	
1	LPP-4	2-25-64	

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

LEGEND		
HOLE	DESCRIPTION	REQ'D
A	11/64 DIA	1
B	.250-.253 DIA	1

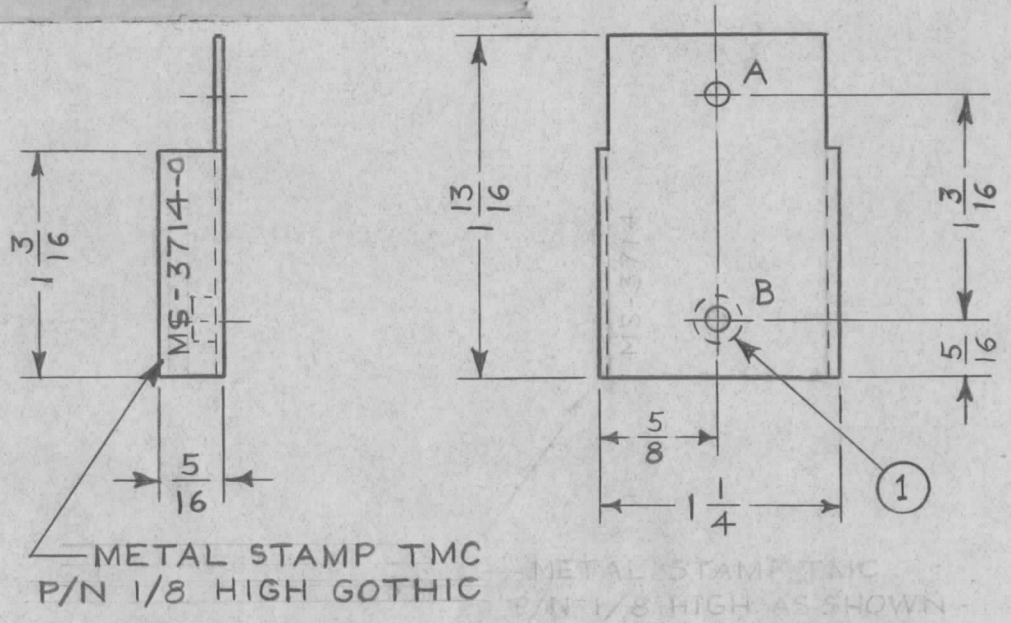

						1	1	NT-129-1032-4	NUT, ROUND, SWAGE TYPE	B
						REQ. ITEM		PART NO.	I. JOHNSON DESCRIPTION	SYMBOL
								.062	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
								5052-H32 ALUMINUM	BRACKET, SUPPORT, CABLE	
								MATERIAL		
								—H—		
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
								YELLOW IRIDITE S404		
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
										MS-3714 0

ORIGINAL RELEASE FOR PRODUCTION
 EXPER. RELEASE

DATE: 3/9/64
 CH. NO.: 2
 DRAFTS: [Signature]
 CHECKER: [Signature]
 ENG. APP.: [Signature]

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES AND INCLUDE
 CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS
 .X ± .05
 .XX ± .01
 .XXX ± .005

FRACTIONS
 ± 1/64
 ANGLES
 ± 0° 30'

TOLERANCES
 CODE
 A

SCALE: 1:1

DRAWN: [Signature]
 CHECKED: [Signature]
 FINAL APPROVAL: [Signature] 3/9/64