


HOLES:

A - .191-.194 DIA. (2REQ.)

B - .221-.224 DIA. (1REQ.)

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	KIT-246		11-11-66

MS3760 Ø

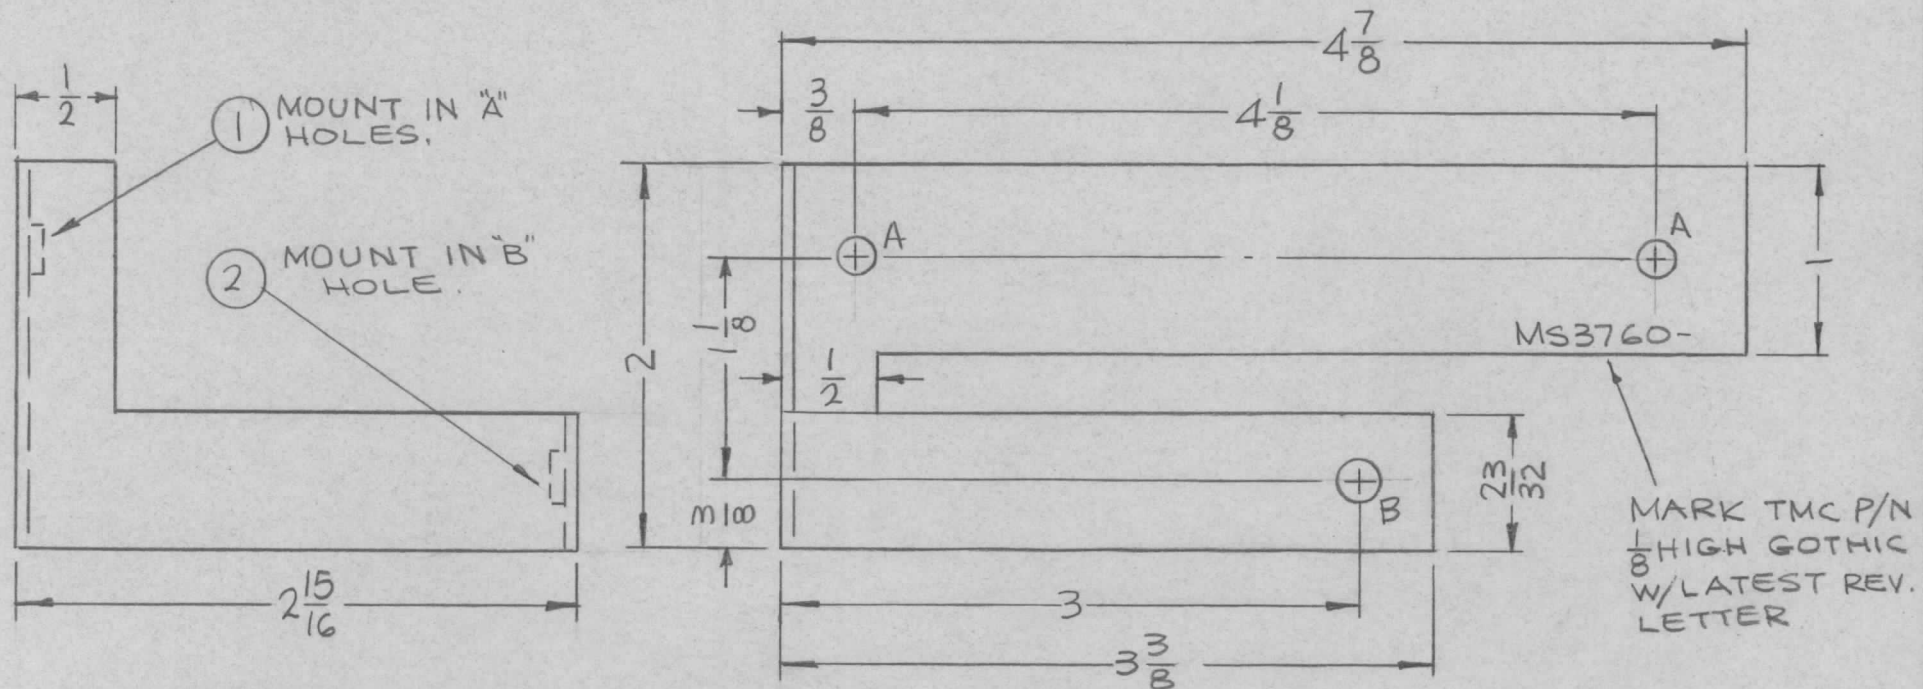

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT INSERTS AFTER FINISHING

1	2	NT129-832-4	NUT, PLAIN, SPLINE	B
2	1	NT129-632-4	NUT, PLAIN, SPLINE	A

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
.081		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
ALUMINUM		BRACKET, MTG. SHIELD		
5052-H32		MPV	QC/S	QJB
S404 YEL. IRIDITE		MS3760 Ø		

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	11-18-66	Ø	RME		
X	EXP. RELEASE	11-14-66	X	MPV	QC/S	QJB

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A