REQ. PER UNIT	USED ON			MS3764	Q
	MODEL	ASS'Y. NO.	DATE		
2	RAK-110	BMA 156	11-17-66		

HOLES

A- DRILL .144 DIA. C'SINK
82° TO .284 DIA. (6 REQ.)

B- SEE DETAIL (2 REQ.)

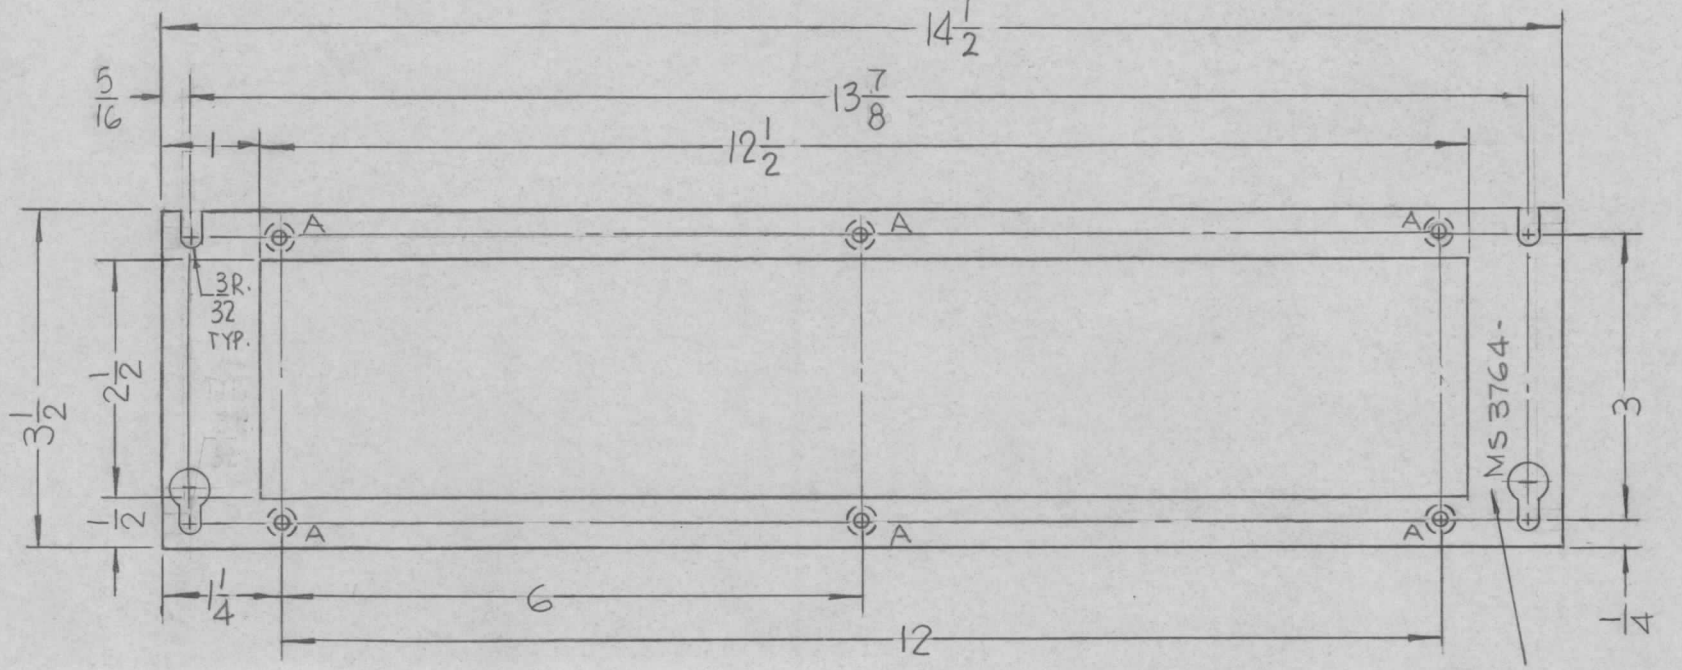



DETAIL-B

MARK TMC P/N 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Q	ORIGINAL RELEASE FOR PRODUCTION	12.1.66	~~11~~	WHO		
X	EXP. RELEASE	11-17-66	X			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:2

TOLERANCES
DECIMALS .X ±.05 .XX ±.01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.
		.063 THICK

STOCK SIZE

ALUMINUM

MATERIAL

5052-H32

TYPE & TEMPER | HEAT TREAT. SPEC.

S520 TEX. VINYL PAINT

FINISH & SPEC. NO.

F. BUDETTI DESCRIPTION | SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

ADAPTER, AIR CHAMBER

DRAWN	CHECKED	FINAL APPROVAL

ELEC. DES. APP.	MECH. DES. APP.	MS3764 Q

REPROVEL NO. 440H 23845