
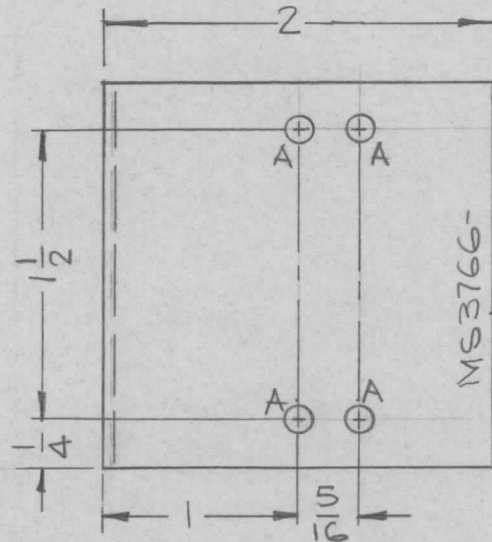


REQ. PER UNIT	USED ON			MS3766	Q
	MODEL	ASS'Y. NO.	DATE		
1	RAK-110-2	BMA153	11-17-66		
1	RAK-111-2	BMA153	11-17-66		

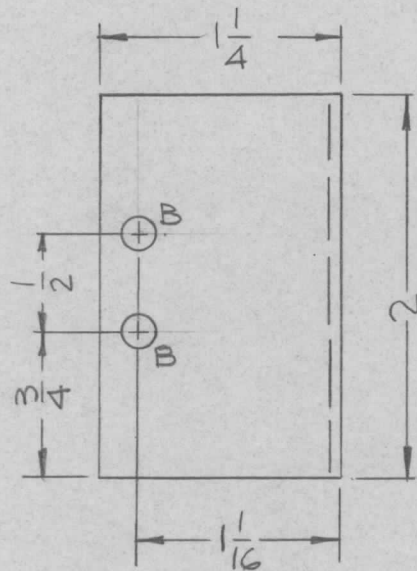

HOLES:

A - 9/64 DIA. (4)
 B - 11/64 DIA. (2)

MARK TMC P/N
 1/8" HIGH GOTHIC
 W/LATEST REV.
 LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REF: LD1506

REQ.	ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
		.081 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE		BRACKET, TERM. BOARD	
Q		ALUMINUM			
X	EXP. RELEASE	MATERIAL			
	ORIGINAL RELEASE FOR PRODUCTION	5052-H32			
		TYPE & TEMPER			
		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE			
		1:1			
	DECIMALS	FRACTIONS			
	.X ± .05	± 1/64			
	.XX ± .01	ANGLES			
	.XXX ± .005	± 0° 30'			
	TOLERANCES	CODE			
		A			
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS3766 Q