


REQ. PER UNIT	USED ON			MS 3798 $\Phi$
	MODEL	ASS'Y. NO.	DATE	
1	HFR-2		5-7-64	

HOLE	DESCRIPTION	REQ
A	9/64 DIA.	4

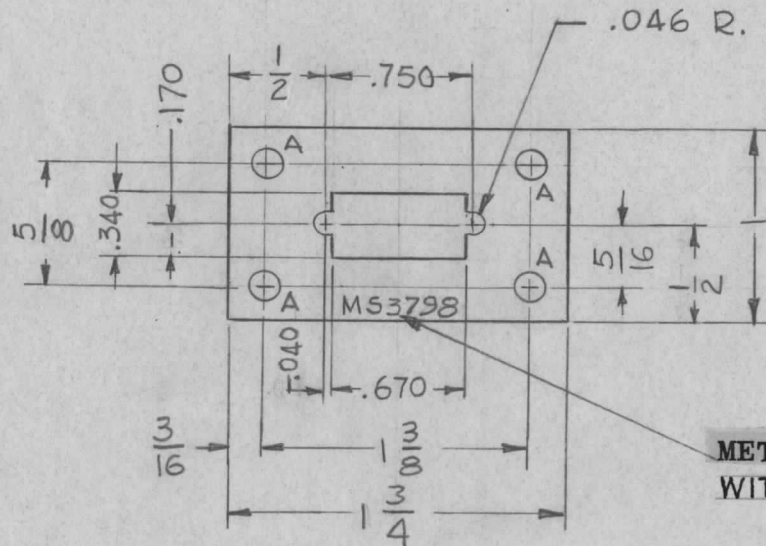

NOTE:  
REMOVE ALL BURRS &  
SHARP EDGES.

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC.  
WITH LATEST REVISION LETTER

REQ. ITEM	PART NO.	ANGER	DESCRIPTION	SYMBOL								
	.081 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK									
$\Phi$	ORIGINAL RELEASE FOR PRODUCTION	2-15-64	$\Phi$ <i>[Signature]</i>									
X	EXPERIMENTAL RELEASE	5-7-64	# G.D.L.									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE	5052-H32	<i>[Signature]</i>	G.D.L.	@	<i>[Signature]</i>
							1:1	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS .X $\pm$ .05 .XX $\pm$ .01 .XXX $\pm$ .005							TOLERANCES	S404-IRIDITE-14-2 AL COAT		<i>[Signature]</i>		MS 3798 $\Phi$
FRACTIONS $\pm$ 1/64 ANGLES $\pm$ 0° 30'							CODE	FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	
							A					