


HOLE	DESCRIPTION	REQ.
A	.161-.164 DIA	2

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	SBS-7	AZ887	5-8-64

MS3801 Ø

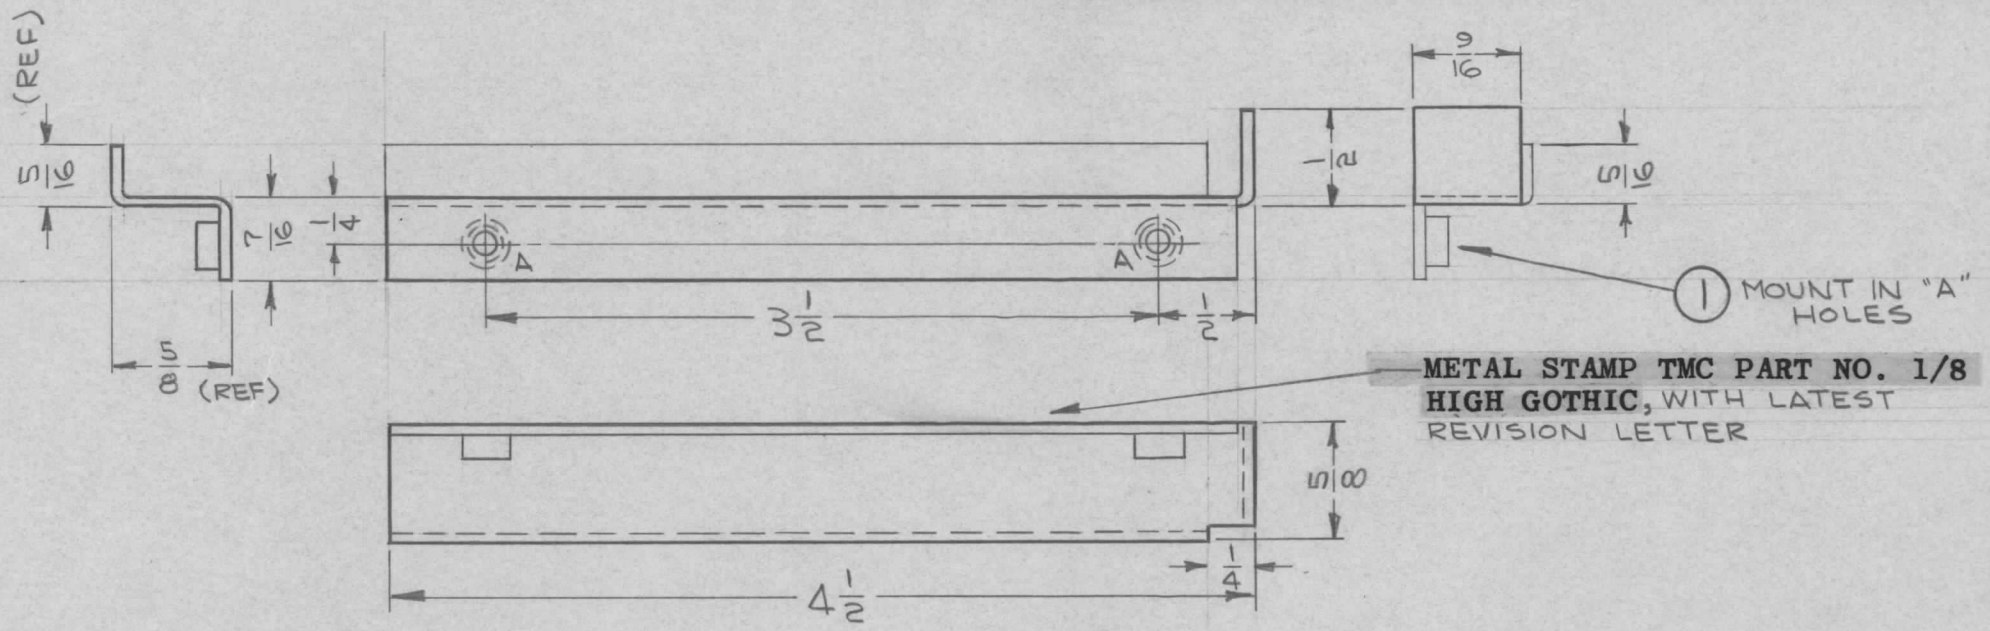

**UNLESS OTHERWISE SPECIFIED:**

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

						2	1	NT129-440-4	NUT, ROUND, SWAGE TYPE	A	
						REQ. ITEM	PART NO.		O. POSE	DESCRIPTION	SYMBOL
						.064 THK STOCK SIZE			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
						ALUMINUM			BRACKET, MOUNTING- LEFT SIDE		
						MATERIAL					
Ø ORIGINAL RELEASE						11/1/65					
SYM	DESCRIPTION					DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE		1:1			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005						TOLERANCES					
FRACTIONS ± 1/64 ANGLES ± 0° 30'						CODE A					
						5052-H32		DRAWN		J. Swan	
						TYPE & TEMPER		HEAT TREAT. SPEC.		CHECKED	
						5404, YELLOW IRIDITE		MECH. DES. APP.		S.D.	
						FINISH & SPEC. NO.		ELEC. DES. APP.		M.S.	
										MS3801 Ø	