


REQ. PER UNIT	USED ON			MS3943	A
	MODEL	ASS'Y. NO.	DATE		
1	VLRB-1/FX208	A3750	10-28-64		

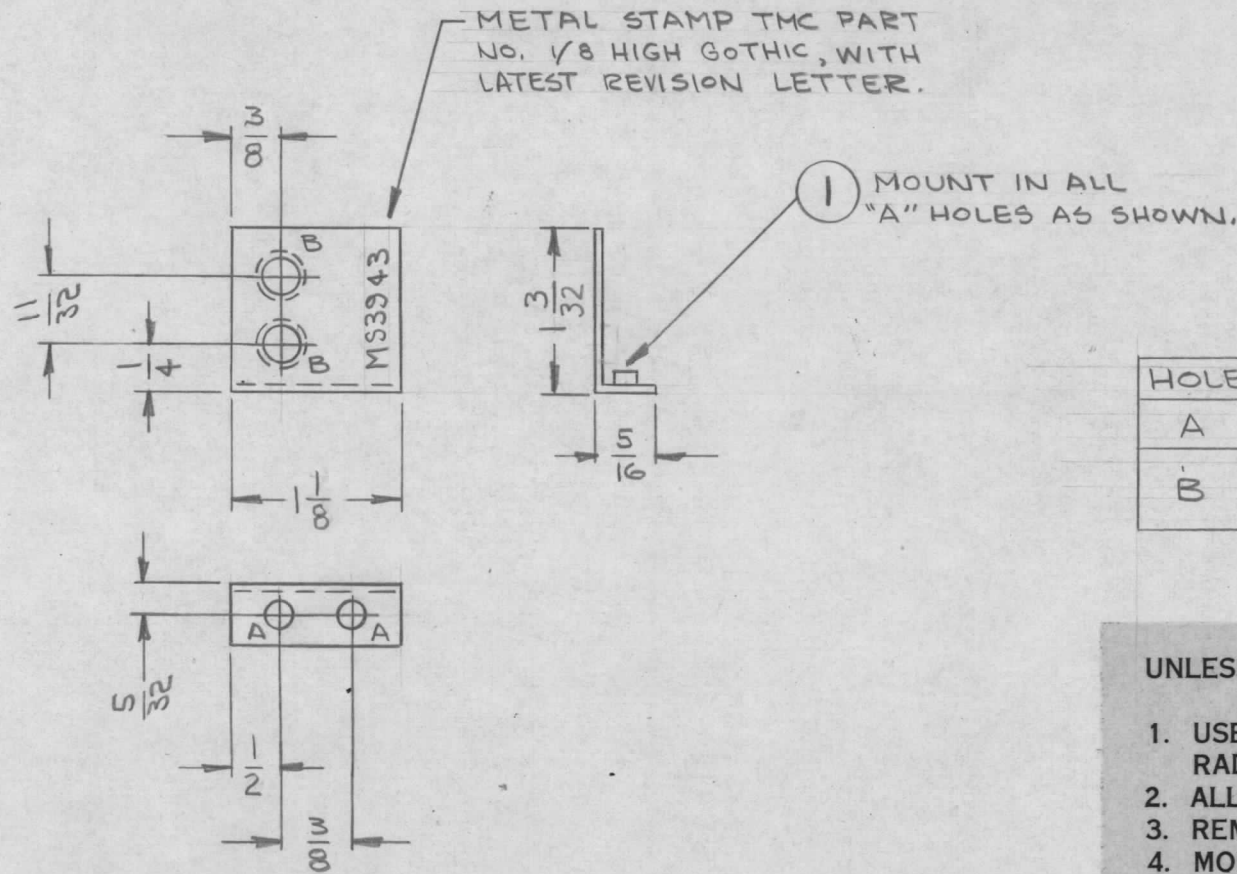

HOLE	DESCRIPTION	REQ.
A	.136-.139 DIA.	1
B	.167 DIA, C'SINK 60°, .015 DP, ON REAR.	2

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

A		3/8 WAS 1/4; 1/2 WAS 1/4; 1/8 WAS 7/8 1 3/32 WAS 27/32; MAT'L. THK. WAS 3/64; /FX208 ADD. TO MODEL.	2-25-65	13538	J.L.	<i>[Signature]</i>	2	1	NT129-256-3	NUT, PLAIN, SPLINE	A		
Ø	ORIGINAL RELEASE FOR PRODUCTION	11-13-64	Ø	J.L.			.040 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
X	EXPER. RELEASE	10-28-64	X	<i>[Signature]</i>			COPPER		SHIELD, RF				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	EMG. APP.	MATERIAL						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1			— # —		<i>[Signature]</i> @ 11-3-64		<i>[Signature]</i>		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A			TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL
							— # —				<i>[Signature]</i>	MS3943	A
							FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		