


REQ. PER UNIT	USED ON			MS3988	Ø
	MODEL	ASS'Y. NO.	DATE		
2	TTC-1		8-17-64		

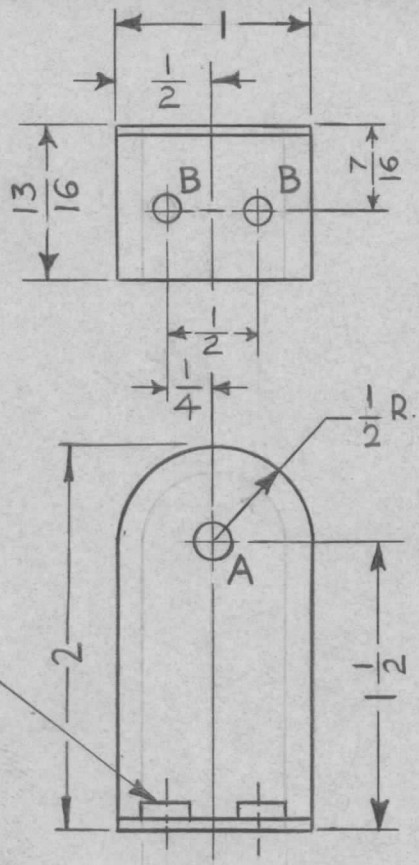

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

HOLE LEGEND		
HOLE	DESCRIPTION	REQ'D
A	3/16 DIA	1
B	#11 DR (.191)	2

2	1	NT129-632-4	NUT, ROUND, SWAGE TYPE	B
REQ. ITEM	PART NO.		A. DUDDLES DESCRIPTION	SYMBOL
Ø	ORIGINAL RELEASE FOR PRODUCTION		9-18-64	Ø
X	EXP. RELEASE		8/17-64	NP
SYM	DESCRIPTION		DATE	CH. NO.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE	1:1
DECIMALS		FRACTIONS		CODE
.X ± .05		± 1/64		A
.XX ± .01		ANGLES		
.XXX ± .005		± 0° 30'		
TOLERANCES				
		5052-H32		#
		IRIDITE PER S404		
		TYPE & TEMPER		HEAT TREAT. SPEC.
		DRAWN		CHECKED
		ELEC. DES. APP.		MECH. DES. APP.
		FINISH & SPEC. NO.		
		MOUNTING BRACKET, COIL		
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		
		MATERIAL		
		ALUMINUM		
		STOCK SIZE		
		.064 THICK		
		MOUNTING BRACKET, COIL		
		N. Peters		@ 9-17-64
		FINAL APPROVAL		
		MS3988		Ø