


HOLES	DESCRIPTION	REQ.
A	.120 D. C'SK 82° TO .230 DIA	3

REQ. PER UNIT	USED ON			MS 3993	A
	MODEL	ASS'Y. NO.	DATE		
8	LFCA-1		8-17-64		

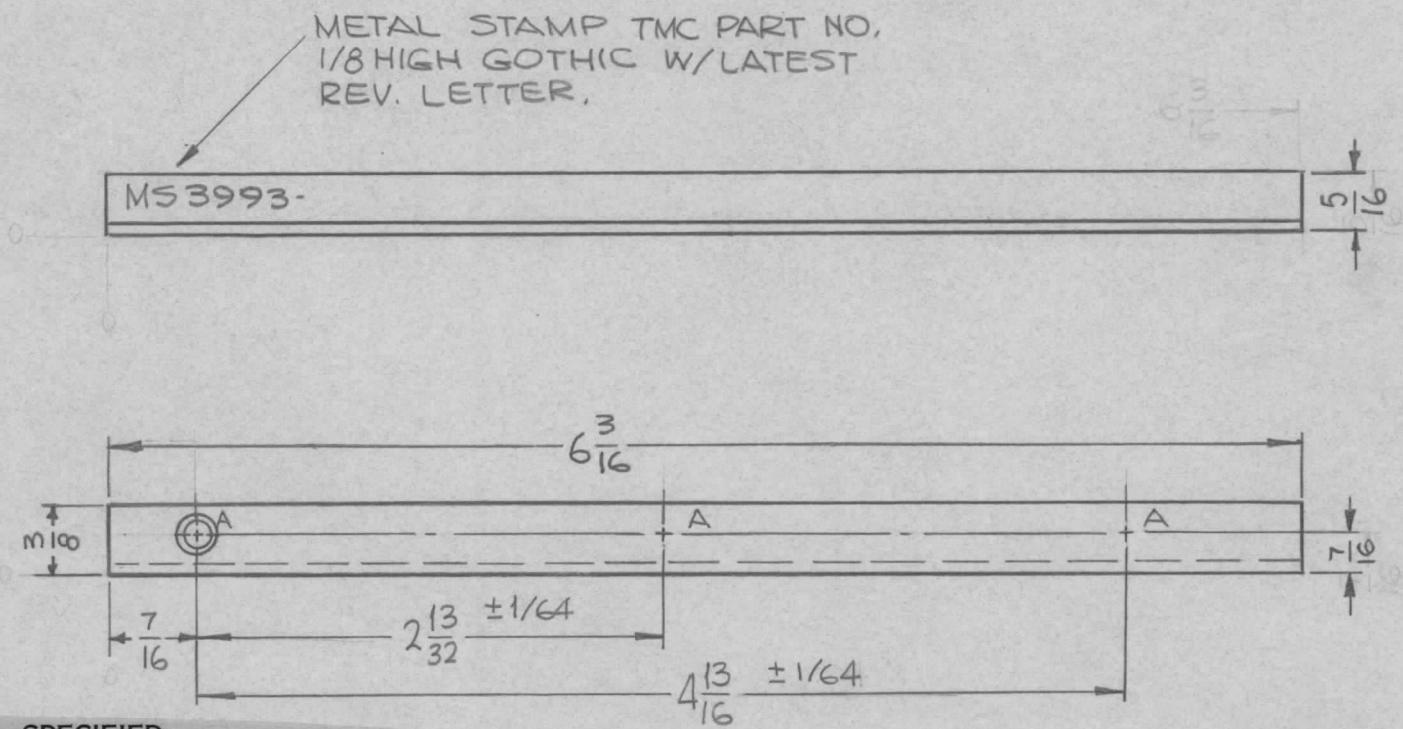

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	M. GELLMAN	DESCRIPTION	SYMBOL	
A	"A"-HOLES WERE .125 DIA	10.30.64	12814	LB	@	SRG						
Ø	ORIGINAL RELEASE FOR PRODUCTION	8-31-64	Ø	LB				.064 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
X ₁	DIM. METHOD CHANGED	8.28.64	X ₁	LB				STOCK SIZE	STIFFENER, P.C. BOARD SIDEBAND			
X	EXPERIMENTAL RELEASE	8-17-64	X	SRG				ALUMINUM	UNIT 5007			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1						5052-H32	SRG		
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A								
	TOLERANCES							S404 YELLOW IRIDITE				
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS 3993 A	