


REQ. PER UNIT	USED ON			MS 4221 \emptyset
	MODEL	ASS'Y. NO.	DATE	
4	GPT-10KLF		2/8/65	

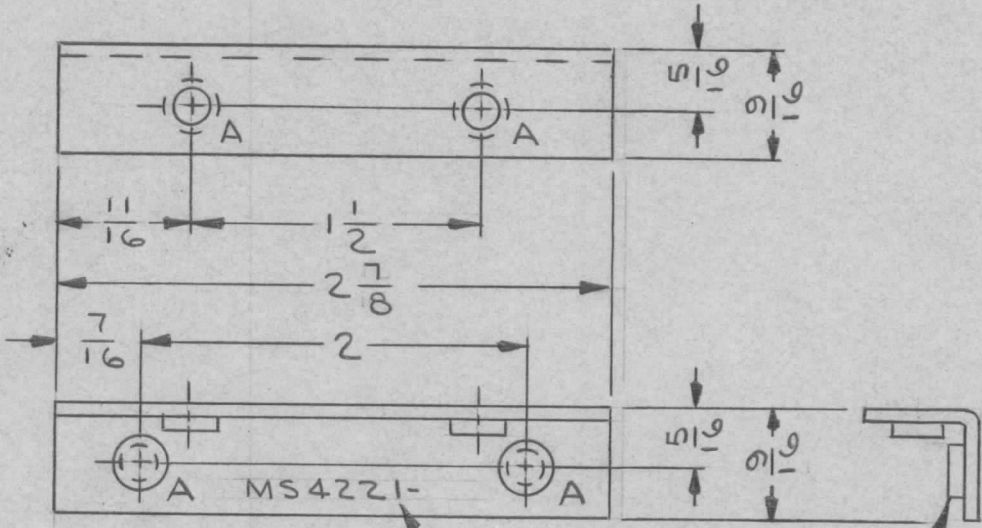

HOLE	DESCRIPTION	REQ'D
A	.221-.224 DIA	4

METAL STAMP 1/8 HIGH GOTHIC
TMC PT. NO. W/LATEST REV. LETTER

1 MOUNT IN ALL
"A" HOLES

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

4	1	NT-129-832-4	NUT, ROUND, SWAGE TYPE		
REQ. ITEM	PART NO.		DESCRIPTION		SYMBOL
	.064 THK		THE TECHNICAL MATERIEL CORP.		
	STOCK SIZE		MAMARONECK, NEW YORK		
	ALUMINUM		BRACKET, SUPPORT		
	MATERIAL		(ZENER BOARD)		
	5052-H32		LESHINSKI	JCB	MS 4221 \emptyset
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	YELLOW IRIDITE PER S404				
	FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

\emptyset	ORIGINAL RELEASE	12/21/65	\emptyset				
X	EXP. RELEASE	2/8/65		JL			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					
		1:1					
DECIMALS	FRACTIONS	CODE					
.X \pm .05	\pm 1/64						
.XX \pm .01	ANGLES						
.XXX \pm .005	\pm 0° 30'						
TOLERANCES							