


REQ. PER UNIT	USED ON			MS4314	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RFTA-1		4.23.1965		

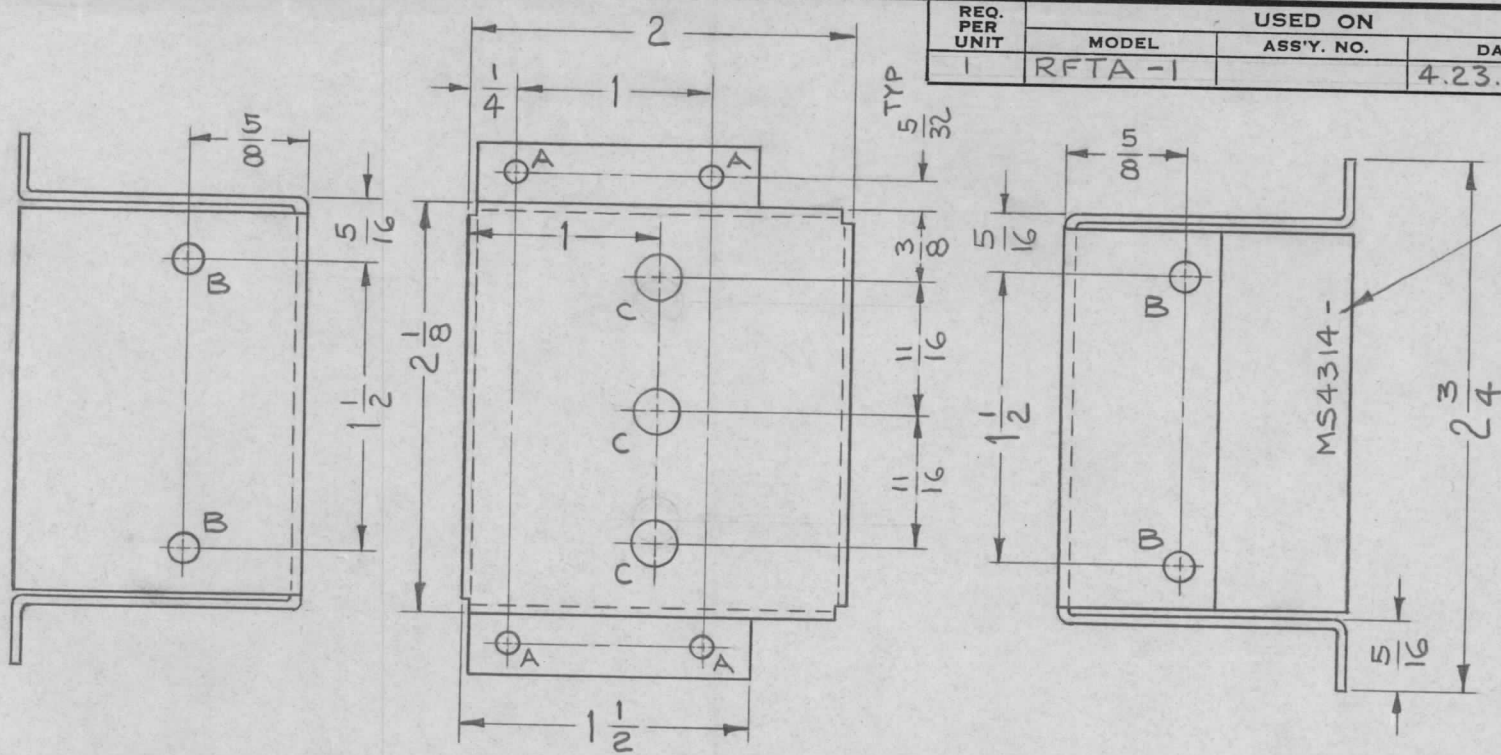

MARK TMC PART NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER.

HOLE	DESCRIPTION	REQ
A	1/8 DIA	4
B	5/32 DIA	4
C	1/4 DIA	3

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REF: LD1767

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	6.7.66	Ø	WHD		File	.064 THICK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
X ₂	COMPL. REVISED, WAS 2 SIZE	4.23.65	X ₂	LSB			ALUMINUM		CHASSIS, SENSING			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							MATERIAL					
SCALE 1:1							5052 - H32		WHD	JCB	02.02	MLK
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							TYPE & TEMPER		DRAWN		CHECKED	
FRACTIONS ± 1/64 ANGLES ± 0° 30'							S404 YEL. IRIDITE		RIB		ML	
TOLERANCES							FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.	
CODE A											MS4314 Ø	