


REQ. PER UNIT	USED ON			MS4322	Ø
	MODEL	ASS'Y. NO.	DATE		
1 EA	RFTA-1	A5348	1-6-65		

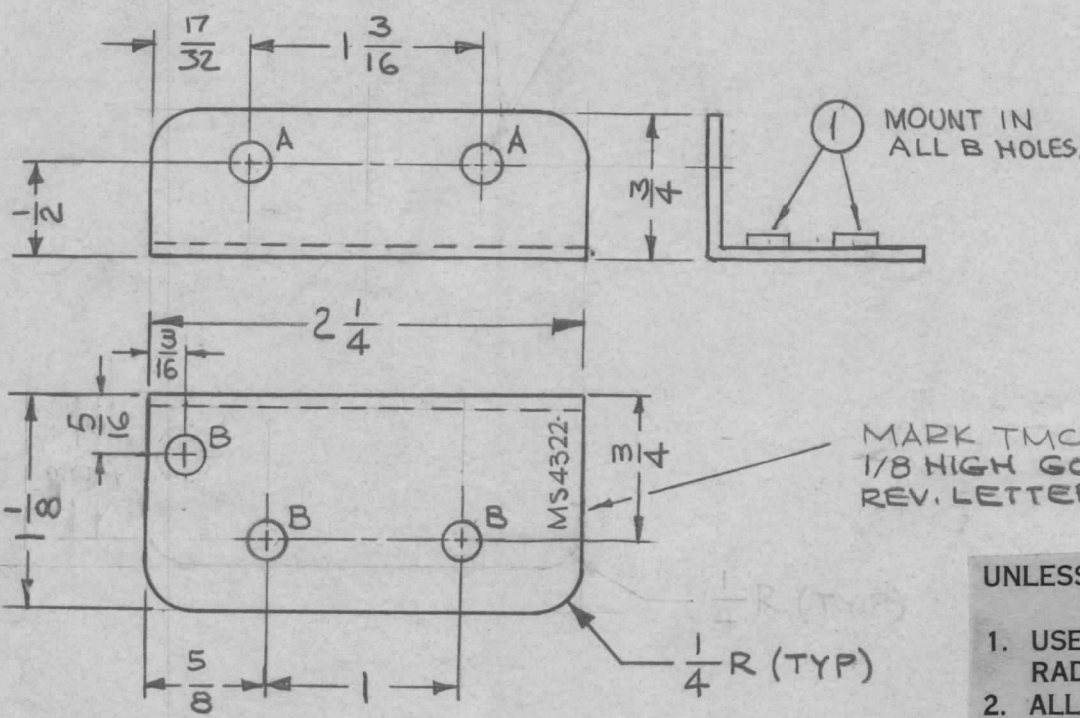

HOLES	DESCRIPTION	REQ
A	13/64 DIA.	2
B	221-.224 DIA.	3

MARK TMC PART NUMBER 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

						3	1	NT129-832-4	NUT, PLAIN, SPLINE	B	
						REQ. ITEM		PART NO.	F. BUDETTI DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	5/20/66	Ø	C.V	File	.081 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
X	EXPER. RELEASE	1.6.65	X	bb		ALUMINUM		BRACKET, MTG, CAPACITOR			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				5052 H-32		W/B 1.6.65	JCB	DB	Milkey
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
				S245 SILVER PLATE S423 SILVER KOTE			00 6/19/66		MS4322 Ø		
				FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.				