


REQ. PER UNIT	USED ON			MS4323	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RFTA-1		1-26-65		

MARK TMC PART NO. NO
1/8 HIGH GOTHIC W/LATEST
REV. LETTER.

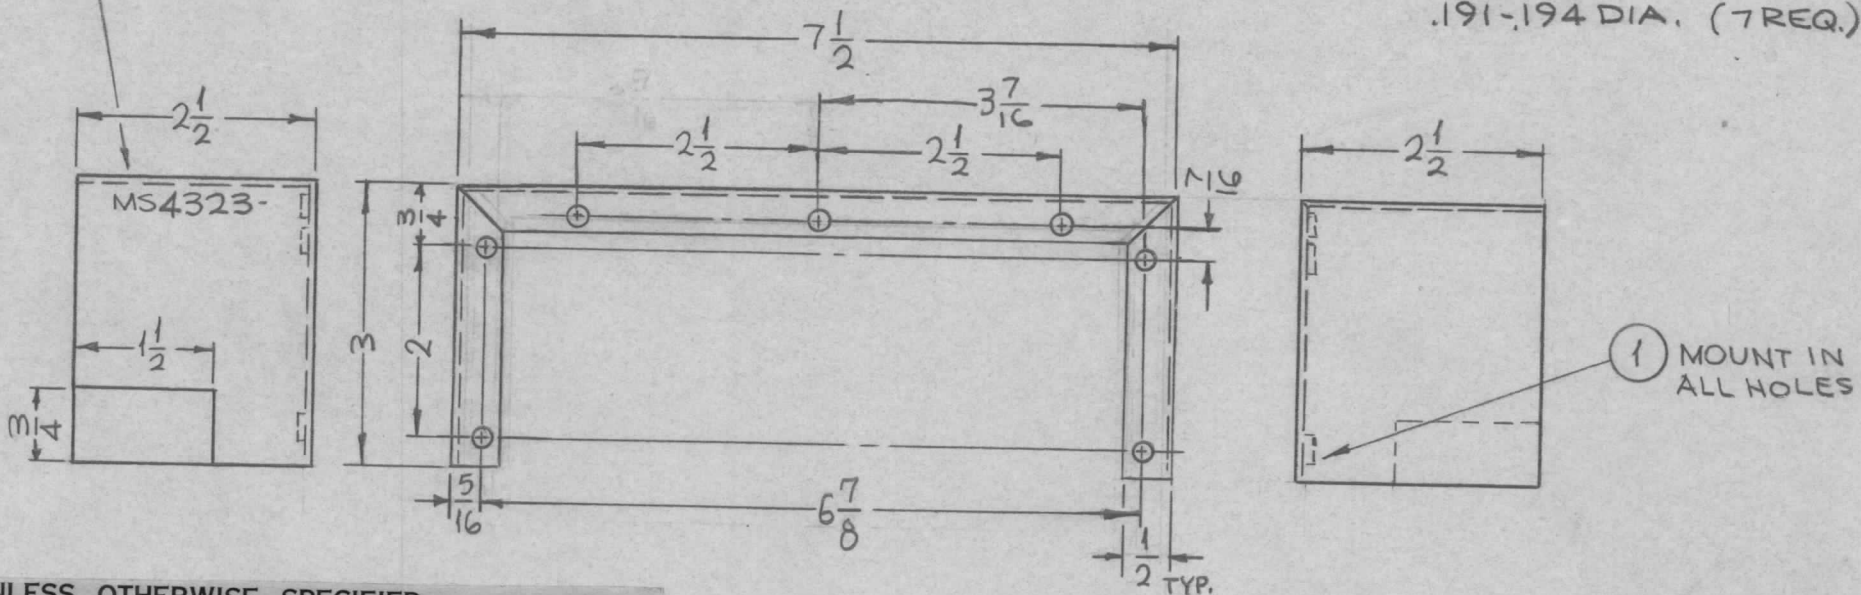

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

Ø	ORIGINAL RELEASE FOR PRODUCTION	6-23-66	#	WHD			1	1	NT 129-632-3	NUT, PLAIN, SPLINE		
X ₁	HOLES OFF WERE 3 7/16 FROM EDGE	7-28-65	X ₁	SRG					.054 THICK	F. BUDETTI DESCRIPTION	SYMBOL	
X	EXP. RELEASE	1-26-65	X	SRG					STOCK SIZE	THE TECHNICAL MATERIEL CORP.		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			ALUMINUM	MAMARONECK, NEW YORK		
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE									SHIELD, METERS	
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE							5052-432	SRG	QCB
	TOLERANCES		A							TYPE & TEMPER	CHECKED	FINAL APPROVAL
										5404 YEL. IRIDITE	00 6/26/66	MS4323
										FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.