


REQ. PER UNIT	USED ON		MS4374 Ø
	MODEL	ASS'Y. NO.	
1	RFTA-1		1-28-65

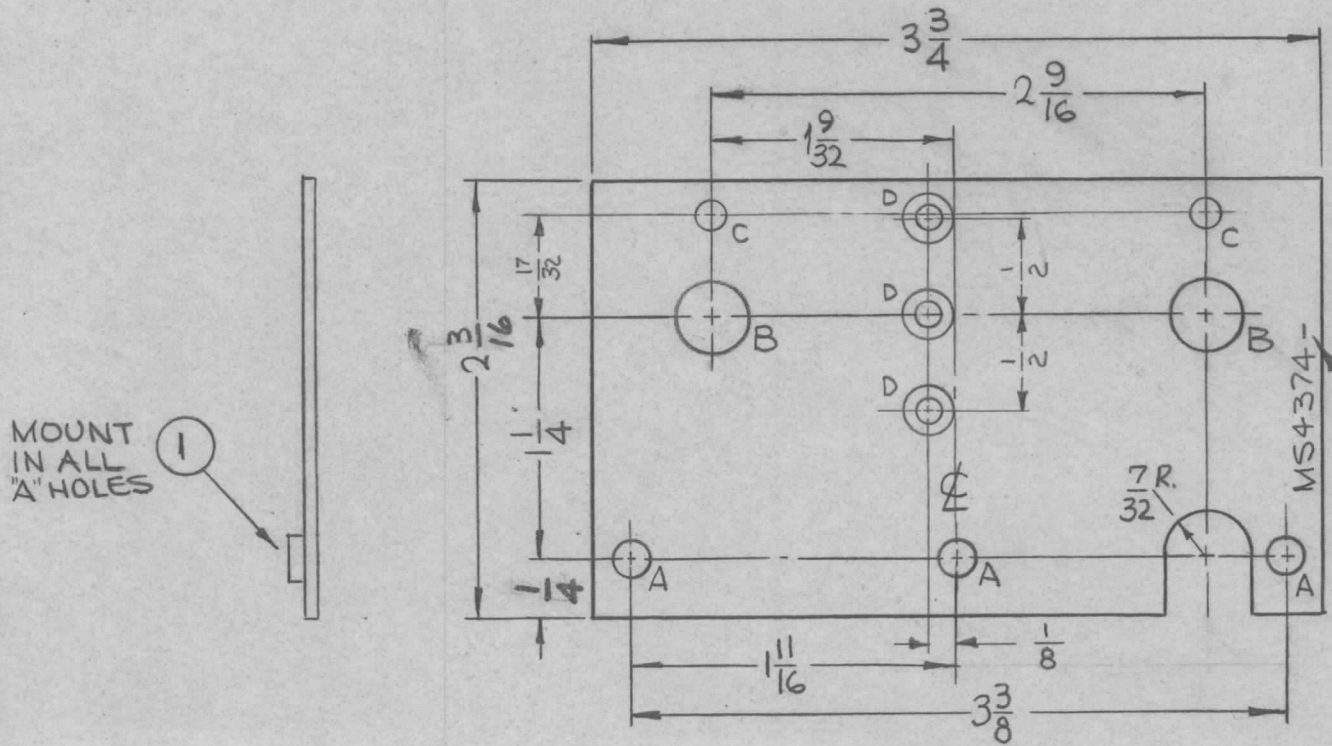

HOLES	DESCRIPTION	REQ
A	.191-.194 DIA.	3
B	3/8 DIA.	2
C	9/64 DIA.	2
D	DRILL .120 D. CSINK 82° TO .230 D.	3

MARK TMC PART NO. IN 1/8 HIGH GOTHIC, WITH LATEST REV. LETTER

3	1	NT129-G32-4	NUT, PLAIN, SPLINE		A
REQ. ITEM	PART NO.		F. BUDETTI DESCRIPTION		SYMBOL
Ø	ORIGINAL RELEASE FOR PRODUCTION		6.7.66	#	WV
X ₁	"C" & "D" -HOLES ADDED		5.11.65	X ₁	AB
X	EXP. RELEASE		1-28-65	X	SRG
SYM	DESCRIPTION		DATE	CH. NO.	DRAFTS
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE 1:1		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A	
TOLERANCES		5052-H32		SRG	
		TYPE & TEMPER		DRAWN	
		HEAT TREAT. SPEC.		CHECKED	
		S404 YEL. IRIDITE		FINAL APPROVAL	
		FINISH & SPEC. NO.		ELEC. DES. APP.	
				MECH. DES. APP.	
				MS4374 Ø	