


REQ. PER UNIT	USED ON		MS4401	Ø
	MODEL	ASS'Y. NO.		
	TTRT		3-11-65	
	TTRR		3-11-65	

METAL STAMP TMC  
PART NO. WITH LATEST  
REVISION LETTER. (3/32 HIGH GOTHIC)

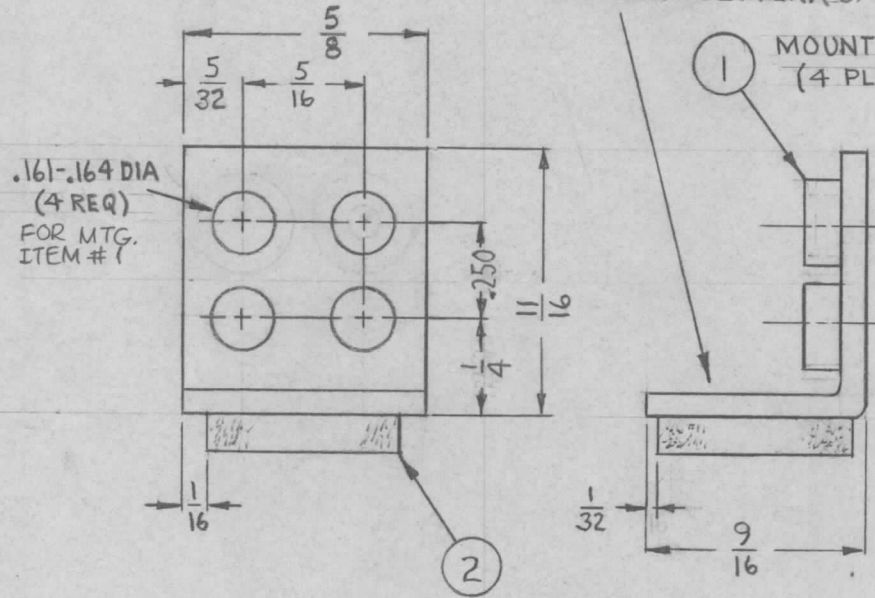

1 MOUNT AS SHOWN  
(4 PLACES)

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

	2	TAMI-2-4-1-G	TAPE, URETHANE				
	4	NT129-440-4	NUT, PLAIN, SPLINE				
REQ. ITEM	PART NO.		DESCRIPTION		SYMBOL		
	.064 THK.		THE TECHNICAL MATERIEL CORP.				
	STOCK SIZE		MAMARONECK. NEW YORK				
Ø	ORIGINAL RELEASE FOR PRODUCTION		BRACKET, RETAINING				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
		3-12-65	AA	JL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					
		2:1					
DECIMALS	FRACTIONS	CODE					
.X ± .05	± 1/64	A					
.XX ± .01	ANGLES						
.XXX ± .005	± 0° 30'						
TOLERANCES			5052-H32	—	2d.	JCK RJC	
			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
			S404 YELLOW IRIDIOTE				
			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		
						MS4401	Ø