MS-4483 Ø

HOLE LEGEND

HOLE	DESCRIPTION	REQ'D
A	DRILL & TAP 6-32	4
B	DRILL & TAP 8-32	1
C	3/16 DIA. HOLE	2
D	.257 DIA. HOLE	1
E	.312 DIA. HOLE	4
F	.312 DIA. REAMED HOLE	1
G	.938 +.001 -.000 DIA. REAMED HOLE	1
H	5/32 DIA.	2
J	SEE DETAIL	1



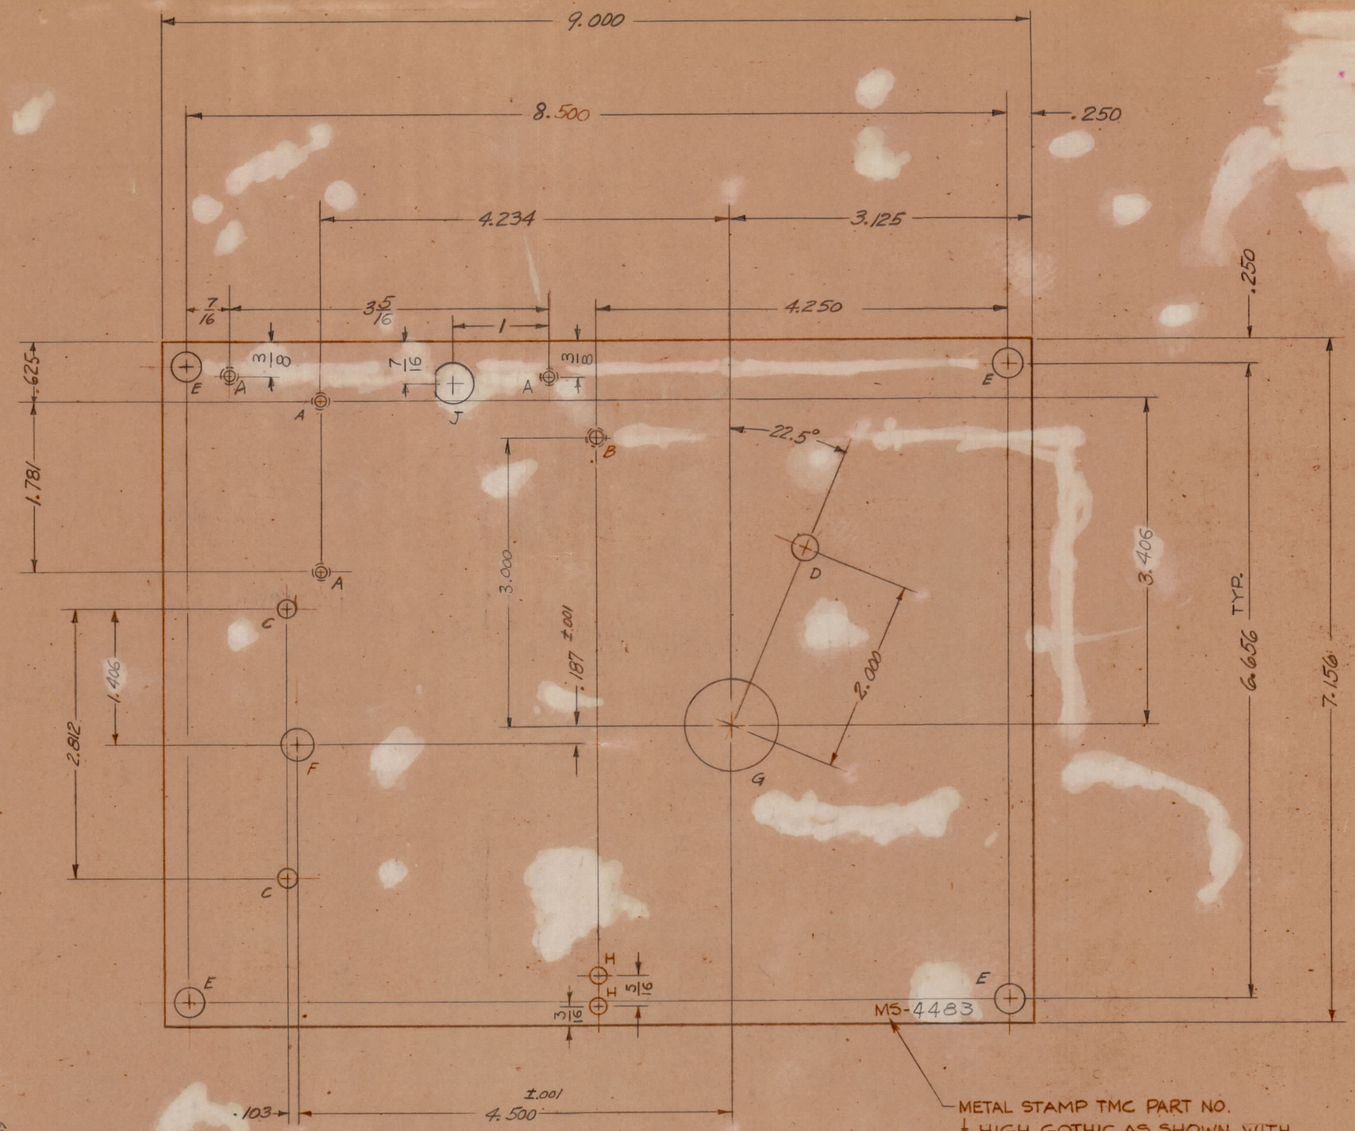



DETAIL "J"
(1 REQ.)

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	~	ORIGINAL RELEASE	3-31-65		G.D.L		

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE 1 : 1

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS & SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASSY. NO.	DATE
1	CHGR-3/CHGR-3A		A3744	3/31/65

USED ON

REQ.	ITEM	PART NO.
		1/8 THK.

STOCK SIZE
ALUMINUM
MATERIAL
2024-T4
TYPE & TEMPER
HEAT TREAT. SPEC.
S 404 YEL. IRIDITE
FINISH & SPEC. NO.

ANGER DESCRIPTION SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

PLATE, MOUNTING
RF SECTION #5

G.D.L 3/31/65	JCB	4/5/65
DRAWN	CHECKED	FINAL APPROVAL
		MS-4483 Ø
ELEC. DES. APP.	MECH. DES. APP.	SHEET OF

TMC FORM NO. 110