



UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON		
	MODEL	ASSY. NO.	DATE
1	RFTA-1		4.23.65

MS4536 ~~Ø~~

HOLE	DESCRIPTION	REQ
A	1/8 DIA	4
B	5/32 DIA	2
C	7/64 DIA	2
D	5/8 DIA	2
E	SEE DETAIL	1

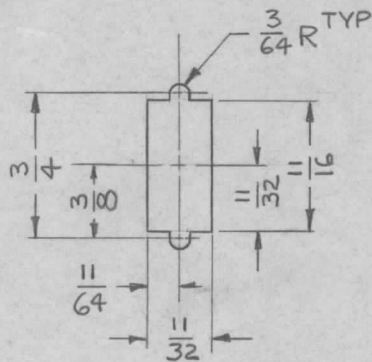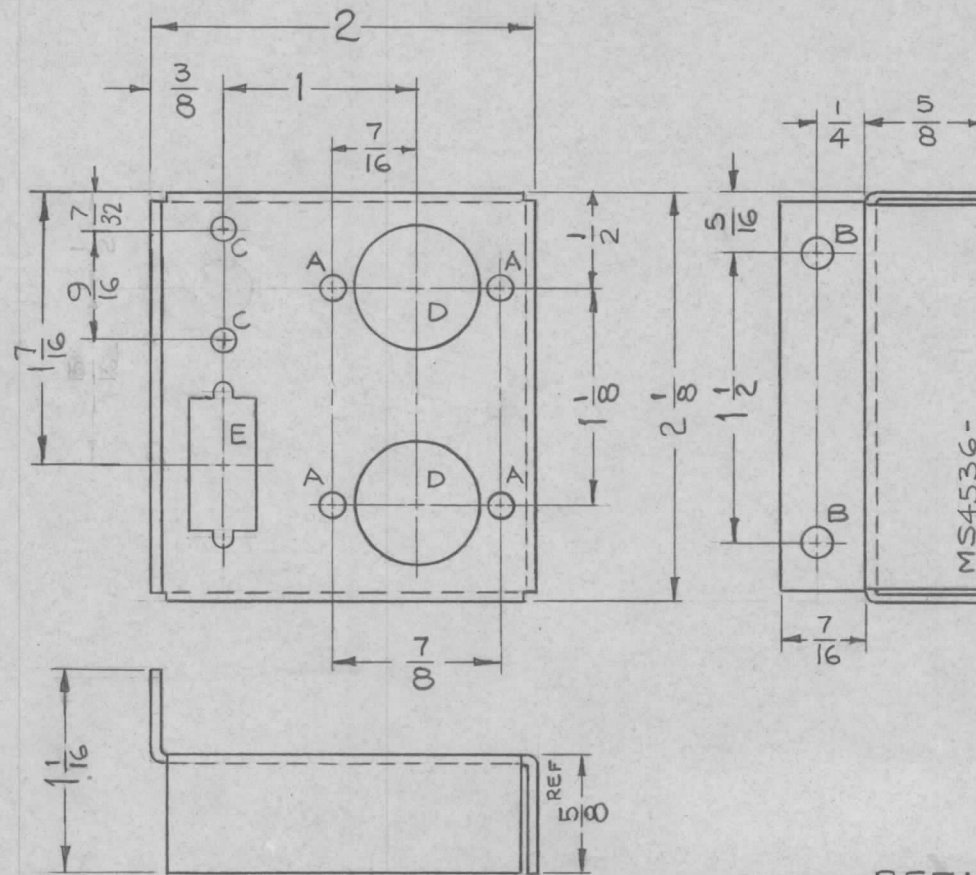

E-DETAIL

MARK TMC PART NO. 1/8 HIGH GOTHIC WITH LATEST REVISION LETTER.

REF: LD 1870

REQ.	ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
		.064 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE			
		ALUMINUM		CHASSIS, SENSING	
		MATERIAL			
		5052-H32			
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
		S404 YEL. IRIDITE			
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND INCLUDE  
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

DECIMALS  
.X ± .05  
.XX ± .01  
.XXX ± .005

FRACTIONS  
± 1/64  
ANGLES  
± 0° 30'

TOLERANCES

CODE  
A

5052-H32

TYPE & TEMPER HEAT TREAT. SPEC. DRAWN CHECKED FINAL APPROVAL

S404 YEL. IRIDITE

FINISH & SPEC. NO. ELEC. DES. APP. MECH. DES. APP.

MS4536 ~~Ø~~