


METAL STAMP TMC PART NO. 3/32
HIGH GOTHIC W/LATEST REV. LETTER

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	LRCB-1		4-23-65
1	LRLD-1		4-23-65

MS4538 Ø

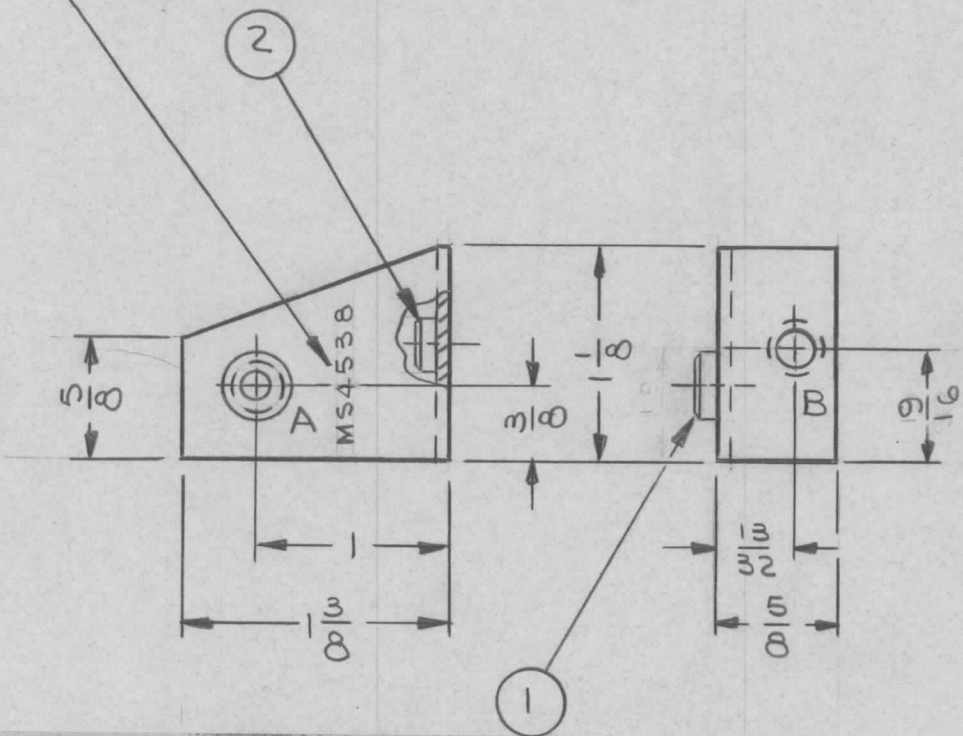

HOLE LEGEND

HOLE	DESCRIPTION	REQ'D
A	.277-.280 DIA	1
B	.221-.224 DIA	1

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

1	2	NT129-832-4	NUT, ROUND, SWAGE TYPE	B
1	1	NT129-1224-4	NUT, ROUND, SWAGE TYPE	A
REQ. ITEM	PART NO.	FE. EATON	DESCRIPTION	SYMBOL
		.064THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE		
		ALUMINUM	MTG BRACKET, RESISTOR	
		MATERIAL		
		5052-H32	J. LESHINSKI	<i>JCL</i>
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
		YELLOW IRIDITE PER S404		CHECKED
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			<i>B/Barnes</i>	MS4538 Ø

Ø	ORIG. REL. FOR PROD.	4/30/65	JL			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1/1			
DECIMALS	TOLERANCES	FRACTIONS	CODE			
.X ± .05		± 1/64				
.XX ± .01		ANGLES				
.XXX ± .005		± 0° 30'				