
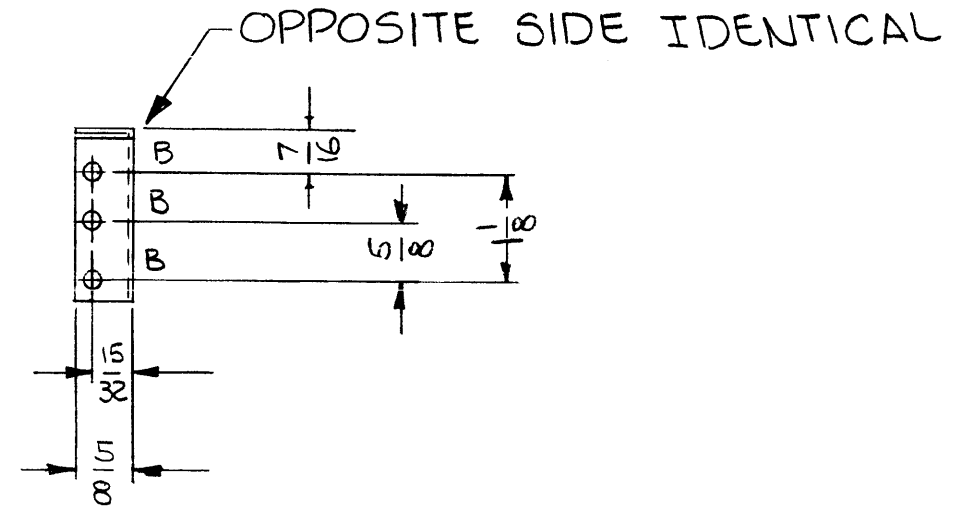
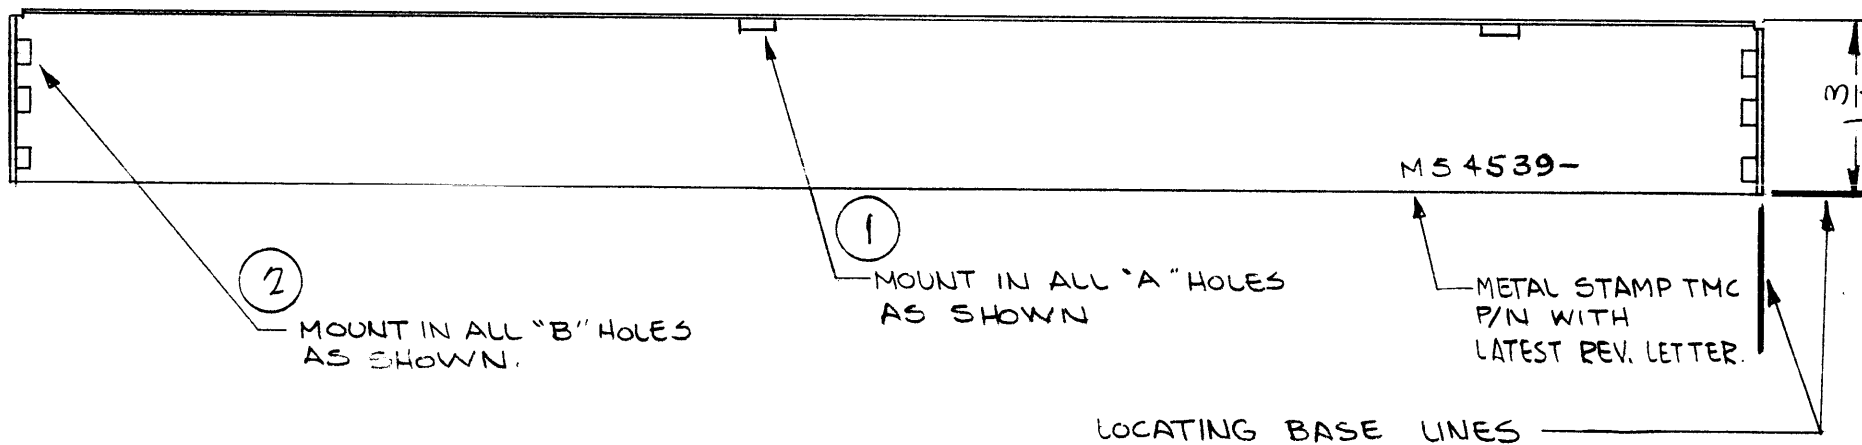


HOLE	DESCRIPTION	REQ.
A	.250-.253 DIA.	2
B	.191-.194 DIA.	6

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD	REVISIONS	
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/27/65	-					
A	CLERICAL CHANGE (MODEL WAS RTTA-1)	5.5.65	-	A.S.				

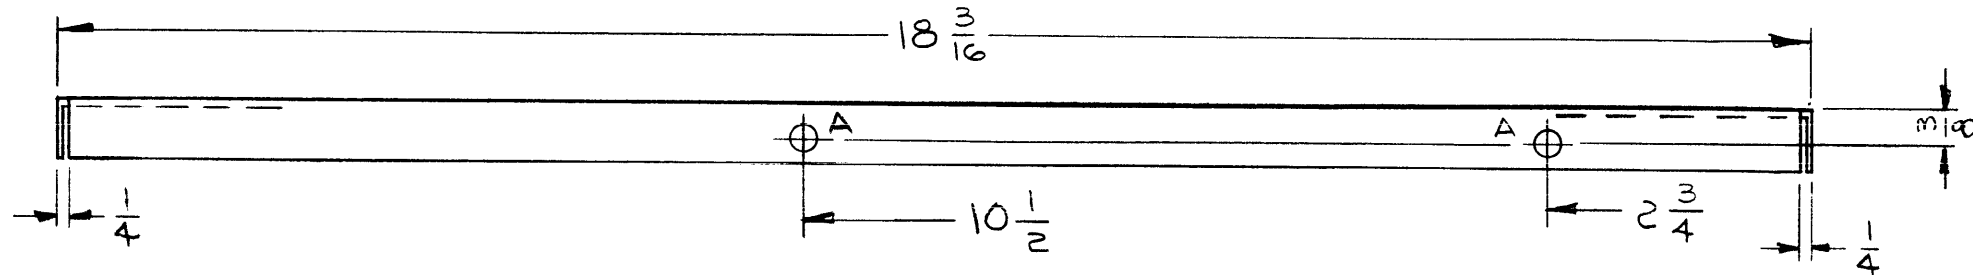

② MOUNT IN ALL "B" HOLES AS SHOWN.

① MOUNT IN ALL "A" HOLES AS SHOWN

MS4539-

METAL STAMP TMC P/N WITH LATEST REV. LETTER.

LOCATING BASE LINES

TMC P/N	DESCRIPTION
MS4539-1	AS SHOWN
MS4539-2	OPPOSITE HAND IDENTICAL

UNLESS OTHERWISE SPECIFIED:

- USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
- ALL ANGULAR BENDS 90 DEGREES
- REMOVE ALL BURRS AND SHARP EDGES
- MOUNT INSERTS AFTER FINISHING

NOTES

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:2	RAK 21-C	CODE A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
6	2	NT129-632-4	NUT, PLAIN, SPLINE	B
2	1	NT129-1032-4	NUT, PLAIN, SPLINE	A

F. EATON		LIST OF MATERIAL	
MATERIAL .081, ALUMINUM 5052-H32		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH S404 YEL. IRIDITE		TITLE BRACKET, MOUNTING	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN <i>[Signature]</i>	DATE 9-23-65
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED <i>[Signature]</i>	DATE 4/29/65
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES.	DATE 4-28-65
TOLERANCES		MECH. DES. <i>[Signature]</i>	DATE 4-28-65
		FINAL APPROVAL <i>[Signature]</i>	
		DATE 4/29/65	
		SHEET MS4539	
		REV. LTR. A	