


REQ. PER UNIT	USED ON			MS 4600 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	RFTA-1	A5348	5-25-65	

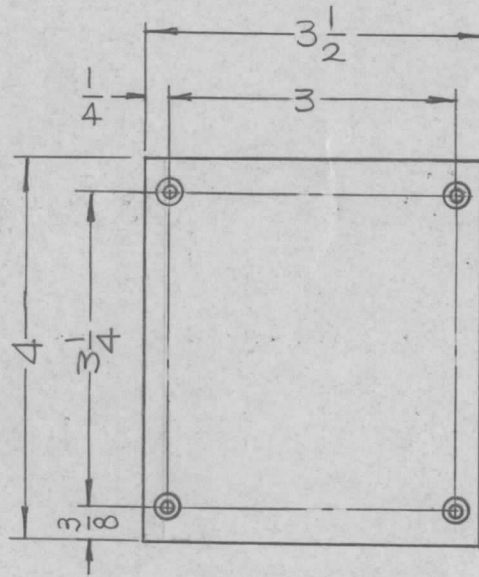

HOLES:
 DRILL .120 DIA. C'SINK 82°
 TO .230 DIA. (4REQ)

MARK STAMP
 TMC PART NO.
 (MS 4600 -)
 1/8 HIGH GOTHIC
 W/LATEST REV.
 LETTER (ON REAR)

FRONT VIEW

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION				SYMBOL				
		.054 THICK	THE TECHNICAL MATERIEL CORP.								
		STOCK SIZE	MAMARONECK. NEW YORK								
\emptyset	ORIGINAL RELEASE	4-12-66	\emptyset	G.D.L.		Ha	ALUMINUM	PLATE, BOTTOM COVER			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1/2:1				5052-H32			
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005		FRACTIONS \pm 1/64 ANGLES \pm 0° 30'		CODE A		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
TOLERANCES						S404 YEL. IRIDITE		9-7-66			MS 4600 \emptyset
						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		