

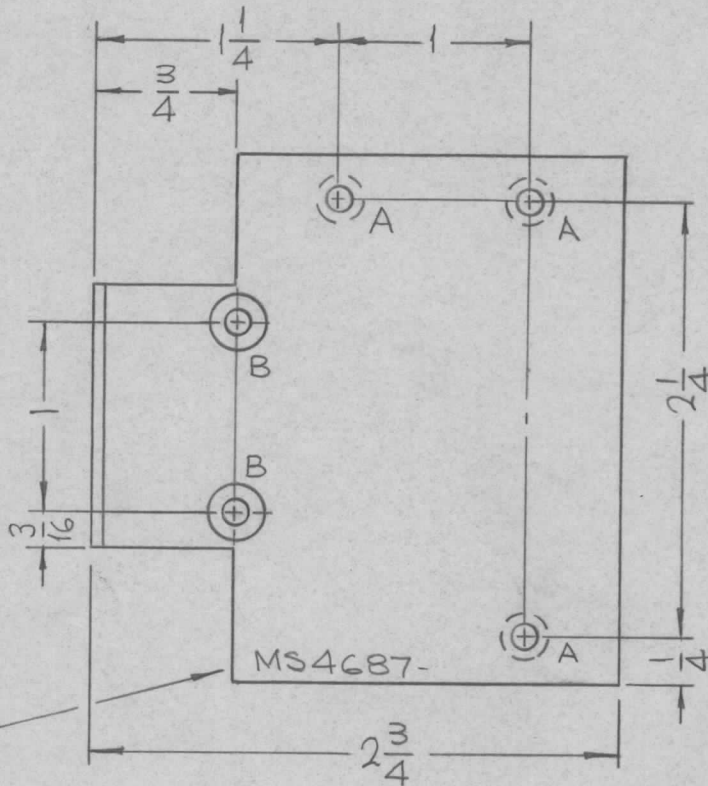


REQ. PER UNIT	USED ON			MS4687 $\emptyset$
	MODEL	ASS'Y. NO.	DATE	
1	TST-10K		7-22-65	

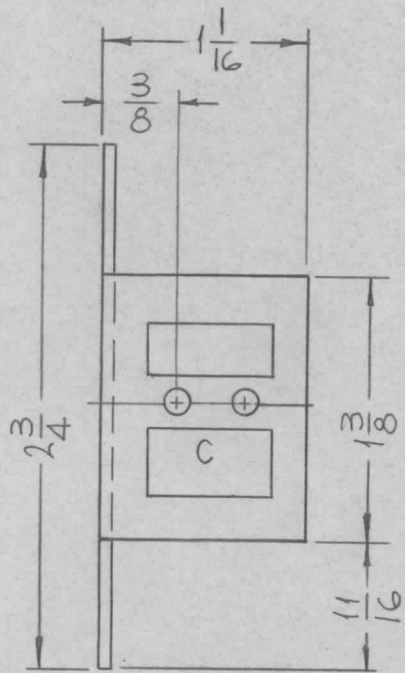

HOLES	DESCRIPTION	REQ.
A	DR.120 C'SINK 82° TO .230 DIA.	3
B	DR.144 C'SINK 82° TO .284 DIA.	2
C	SEE DETAIL	1

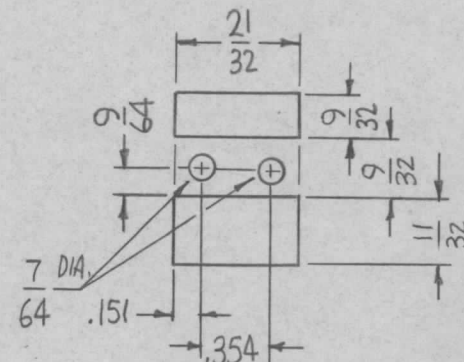

C-DETAIL

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES

MARK  
TMC PART NO.  
1/8 HIGH GOTHIC  
W/LATEST REV.  
LETTER.

REF: LD1973-

						REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION			SYMBOL
						.064 THICK		THE TECHNICAL MATERIEL CORP.			
						STOCK SIZE		MAMARONECK, NEW YORK			
$\emptyset$	ORIGINAL RELEASE	2/15/66				ALUMINUM		BRACKET, MTG. COMPONENTS			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1								
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A.							
							5052-H32	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							S404 YEL. IRIDITE				MS4687 $\emptyset$
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		