


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	GPT-200K	AX395	8-4-65

MS4708  $\emptyset$

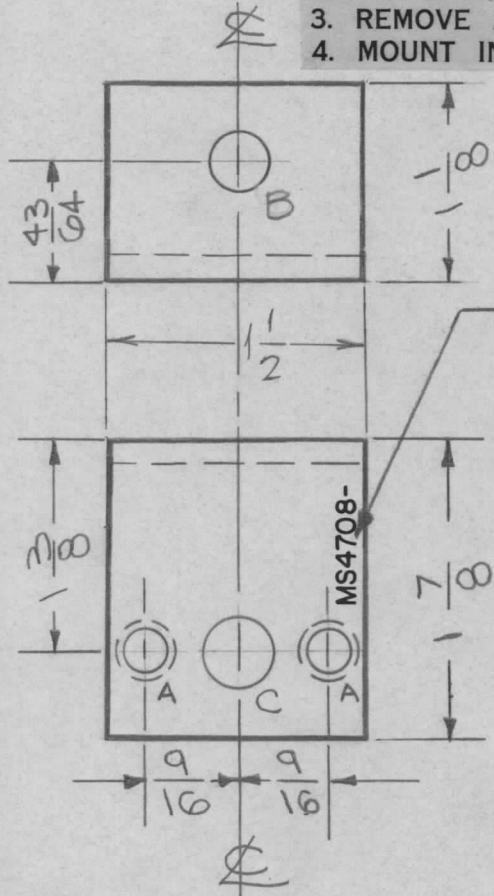

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC, W/LATEST REVISION LETTER.

NOTE:

1. MOUNT ITEM 1 IN "A" HOLES AS SHOWN.
2. BEARING BBI18-3 TO BE PRESS FIT AS SHOWN.

HOLE LEGEND		
HOLE	DESCRIPTION	REQ'D
A	.221-.224 DIA.	2
B	5/16 DIA.	1
C	.377 ± .001 (REFER TO DRWG)	1

1	2	BBI18-3	BEARING	C
2	1	NT-129-832-6	NUT, ROUND SWAGE TYPE	A

REQ.	ITEM	PART NO.	BUDETTI DESCRIPTION	SYMBOL
		1/8 TH'K	THE TECHNICAL MATERIEL CORP.	
		STOCK SIZE	MAMARONECK. NEW YORK	
		ALUMINUM	BRACKET, SHAFT ALIGNMENT	
		MATERIAL	ASS'Y (CAPACITOR)	
5052-H32			GANZA	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S404-YEL IRIDITE				MS4708 $\emptyset$
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

$\emptyset$	ORIGINAL RELEASE FOR PRODUCTION	9/12/65	$\emptyset$	H.V.V.		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE			