


METAL STAMP TMC PT. NO. 1/8 GOTHIC  
W/LATEST REVISION LETTER

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TSTE10K		

MS4711 Ø

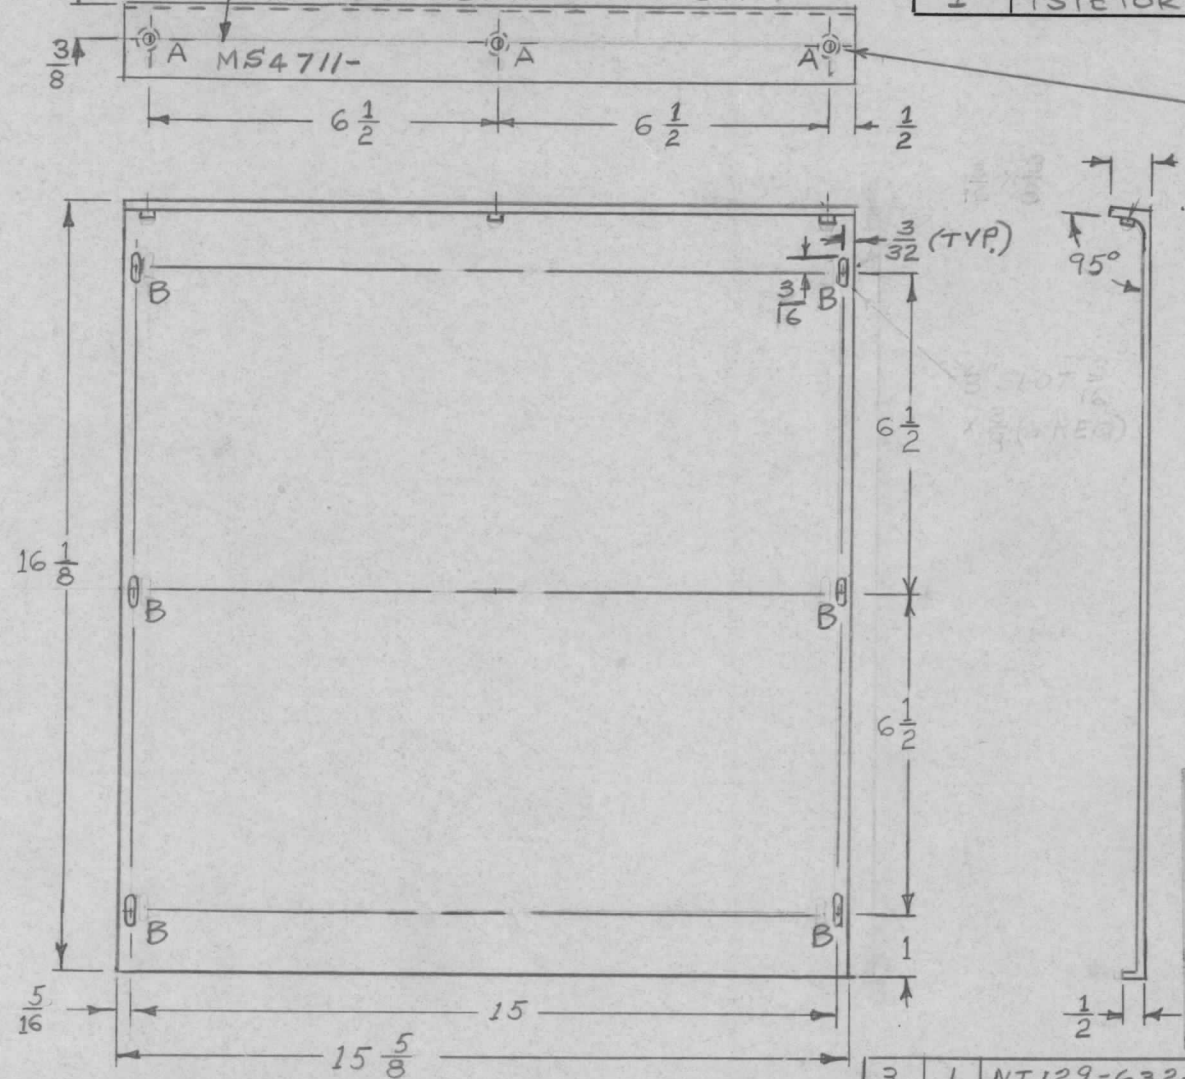

HOLES	REQ
A-.191-.194 DIA.	3
B- 3/16 X 3/8 SLOT	6

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

Ø	ORIG. REL. FOR PROD.	9-16-68	Ø	R.G.	JAD	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE DO NOT SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE			

3	1	NT129-632-3	NUT ROUND SWAGE TYPE.		
REQ.	ITEM	PART NO.	DESCRIPTION		
			SYMBOL		
		.064 THICK	THE TECHNICAL MATERIEL CORP.		
		STOCK SIZE	MAMARONECK, NEW YORK		
		ALUMINUM	SHIELD, LEFT SIDE		
		MATERIAL			
		5052-H32	DRAWN	CHECKED	FINAL APPROVAL
		TYPE & TEMPER	HEAT TREAT. SPEC.		
		S404-IRIDIOTE, 14-2ALCOAT			
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
					MS4711 Ø