


REQ. PER UNIT	USED ON		MS4712 Ø
	MODEL	ASS'Y. NO.	
1	TSTE 10K		

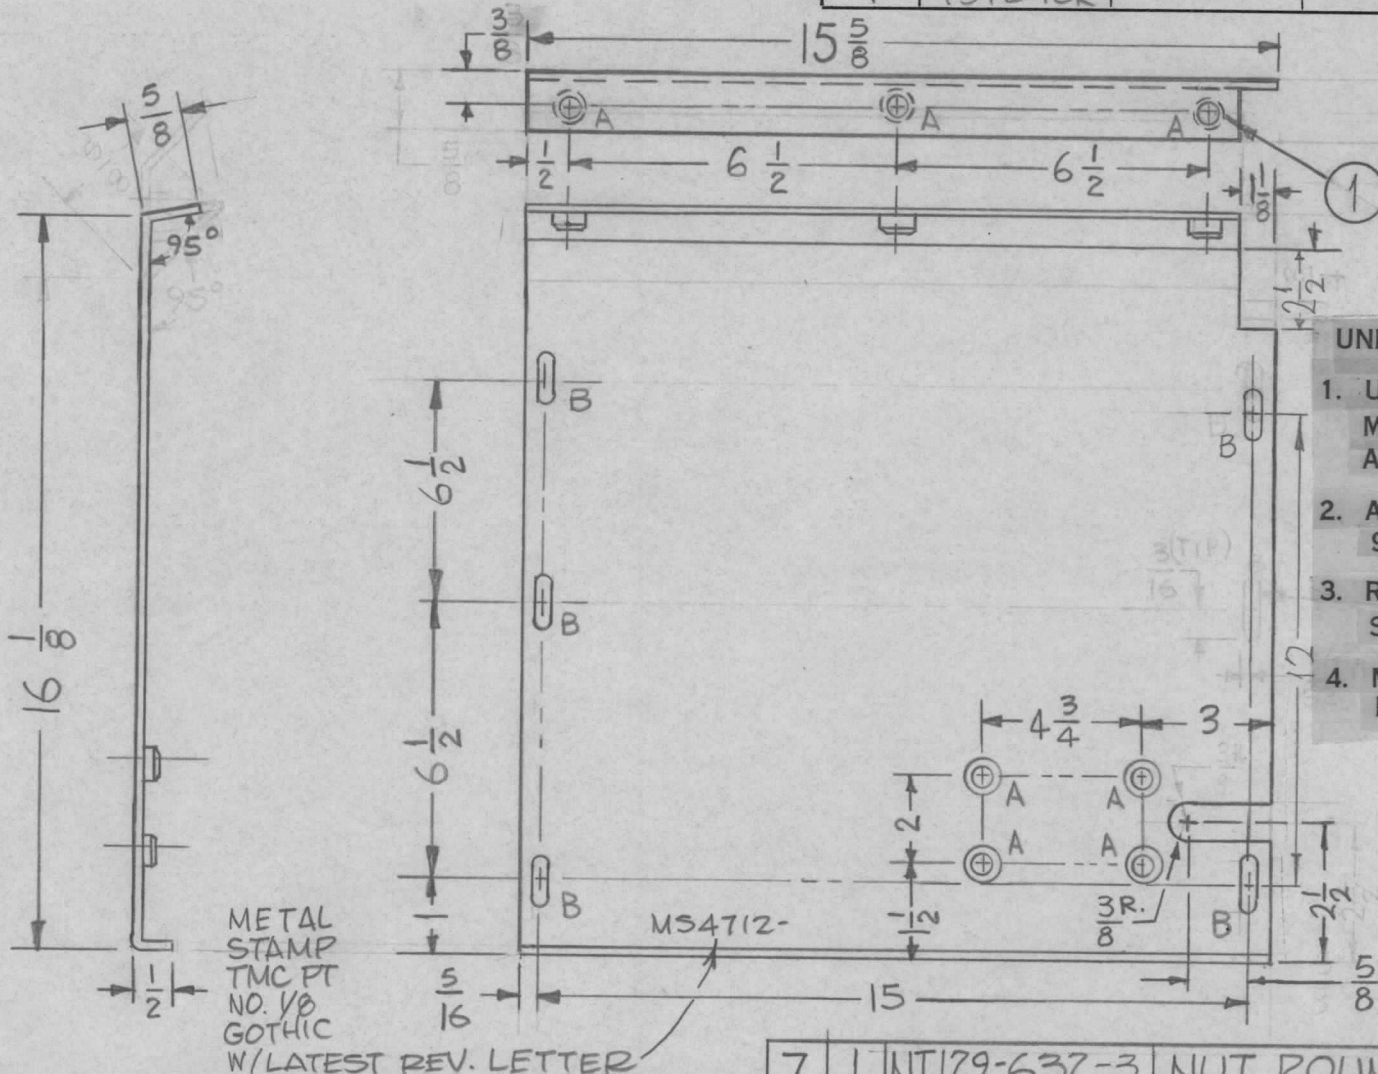

HOLES REQ.
 A-.191-.194 DIA. 7
 B-3/16 X 3/8 SLOT 5

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

7	1	NT129-632-3	NUT ROUND, SWAGE TYPE	A
REQ. ITEM	PART NO.		DESCRIPTION	SYMBOL
	.064 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	SHIELD, RIGHT SIDE
	STOCK SIZE			
	ALUMINUM			
	MATERIAL			
	5052-H32		SG	JHle
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
	YELL IRIDITE S404		da	ll
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
				MS4712 Ø

Ø	ORIG. REL. FOR PROD.	9-16-68	Ø	R.G.	JHle	
X2	3/8R. SLOT ADDED	8-24-65	X2		ll	
X1	NOTCH WAS 1/8 X 1-3/4 @ 'B' SLOT DELETED, @ 'B' SLOT RELOCATED	8-3-65	-A-	JC	ll	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
		Do Not Scale				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			