


REQ. PER UNIT	USED ON			MS4713	Ø
	MODEL	ASS'Y. NO.	DATE		
	TSTE10K				

HOLES REQ
A.191-.194 DIA. 3
B 3/16 X 3/8 SLOT 3

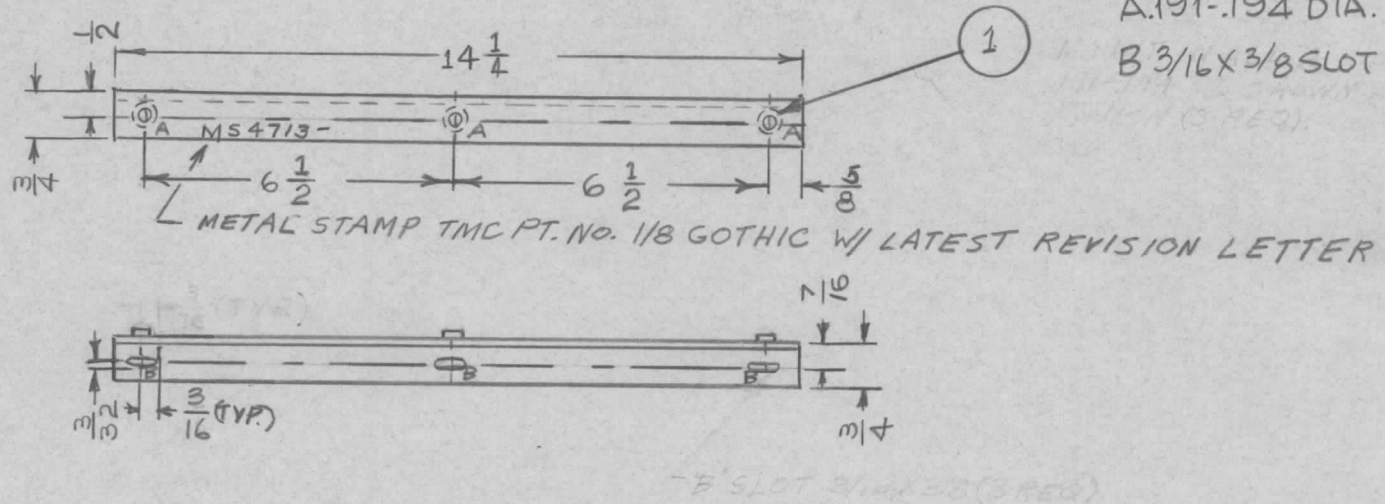

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

							3	1	NT129-632-3	NUT ROUND, SWAGE TYPE.	
							REQ. ITEM		PART NO.	DESCRIPTION	SYMBOL
									.064 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
									STOCK SIZE		
									ALUMINUM	BRACKET MOUNTING, SHIELD	
									MATERIAL	LEFT SIDE	
									5052-H32	SG	
									TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
									YELL IRIDITE S404		CHECKED
									FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
											MS4713
											Ø