


REQ. PER UNIT	USED ON			MS4714
	MODEL	ASS'Y. NO.	DATE	
1	TSTE10K			

① MOUNT IN ALL "A" HOLES AS SHOWN

HOLES REQ
 A-.191-.194 DIA 6
 B-.169 DIA. THRU
 CSK 82° X .337 DIA. 3

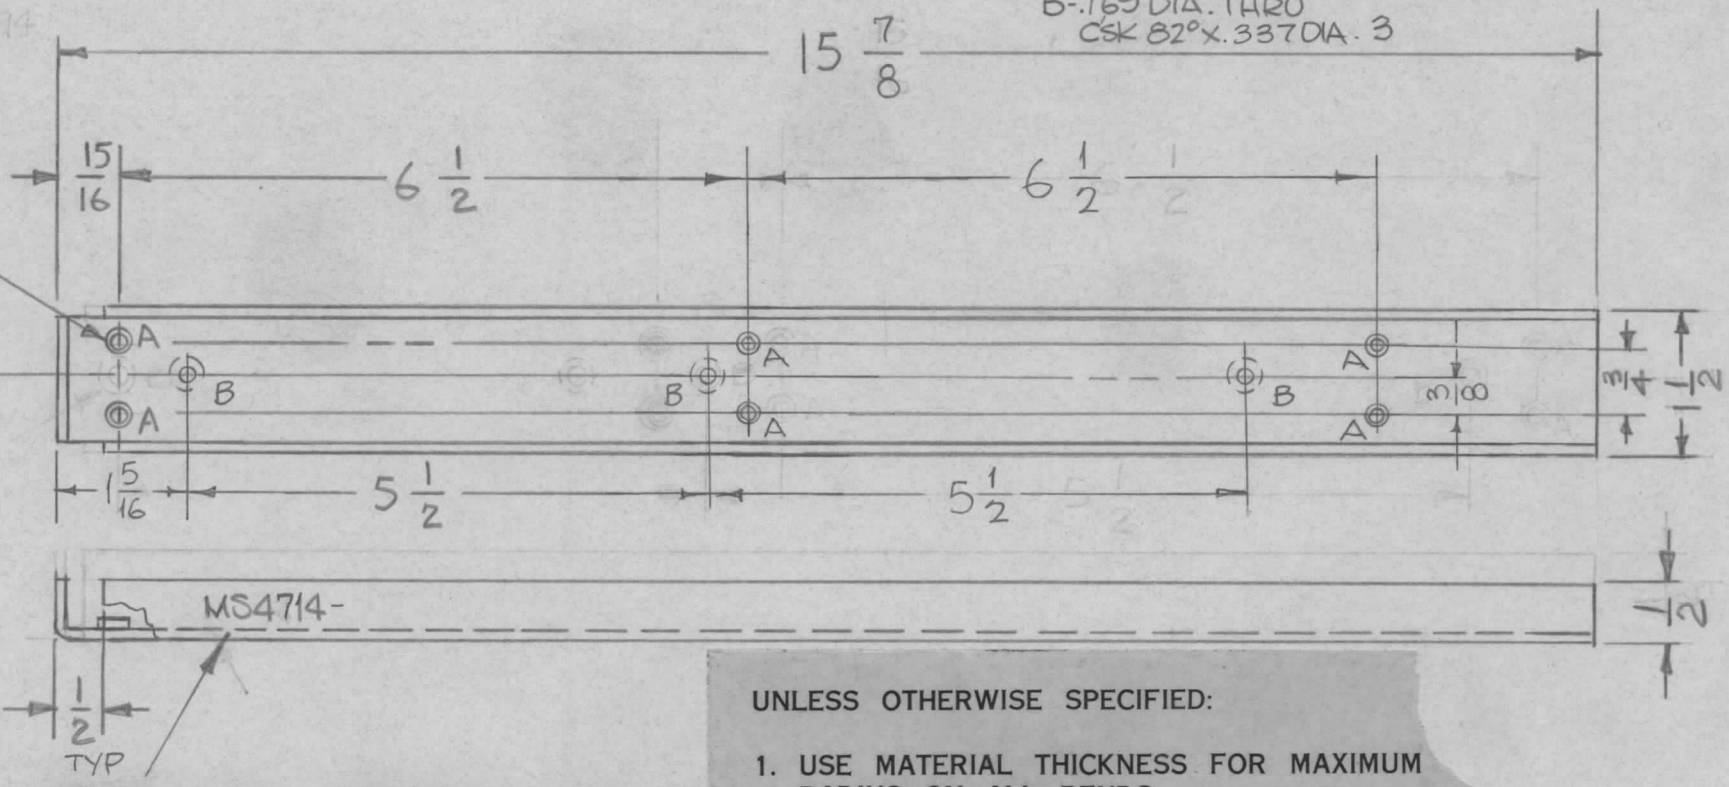

.337 DIA CSK
 EXT TO .169
 3" B HOLES

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

METAL STAMP TMC PART NO. 1/8
 HIGH GOTHIC W/LATEST
 REV. LETTER

6	1	NT129-632-3	NUT, PLAIN, SPLINE TYPE	
REQ. ITEM	PART NO.		DESCRIPTION	SYMBOL
	.064 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE			
	ALUMINUM		BRACKET, SHIELD MTG.	
	MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE	DO NOT SCALE
DECIMALS	FRACTIONS		CODE	
.X ± .05	± 1/64		A	
.XX ± .01	ANGLES			
.XXX ± .005	± 0° 30'			
TOLERANCES				
5052-H32		HEAT TREAT. SPEC.	DRAWN	SG
S404 YEL. IRIDITE			CHECKED	JAL
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS4714

Ø	ORIG. REL. FOR PROD.	9-16-68	Ø	R.G.	JAL	
X2	STOCK SIZE, MATERIAL, ADDED TYPE & TEMP, FINISH ADDED	9-1-65	X2	JAL	JAL	
X1	ON ③ "B" HOLE 1 5/16 DIA WAS 15/16, 15 7/8 DIA WAS 15 1/4	8-3-65	JAL	JC	JAL	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.