


REQ. PER UNIT	USED ON			MS 4834 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	RFTA-1		9-8-65	

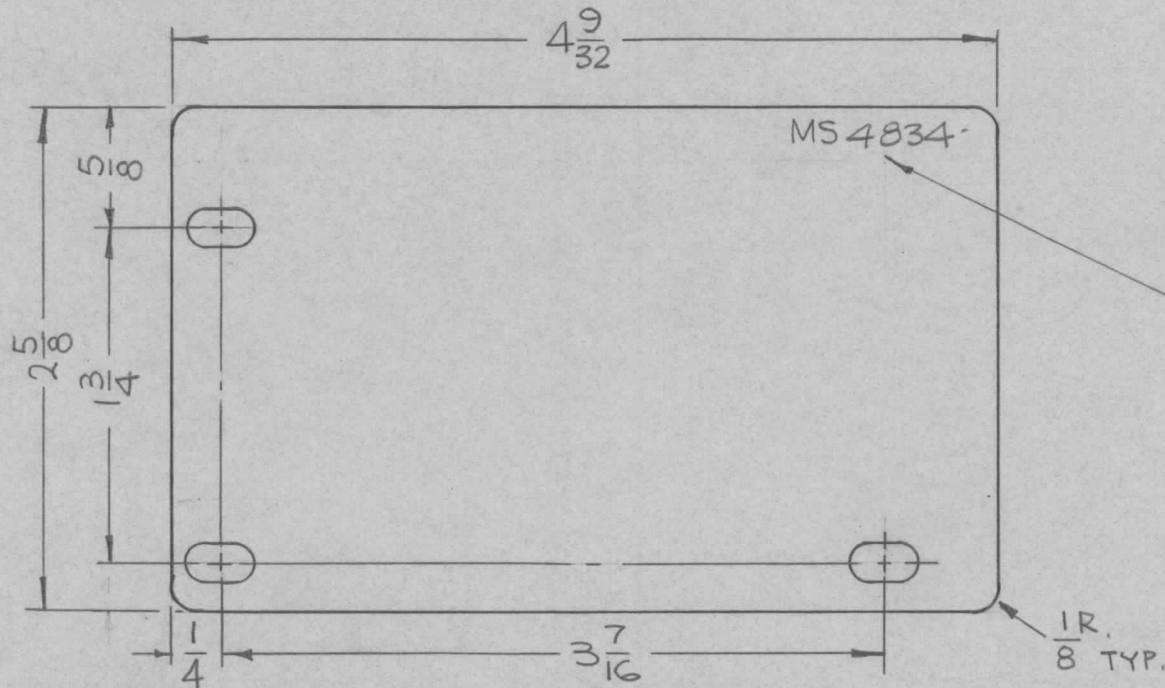

HOLES:
 $\frac{3}{16} \times \frac{3}{8}$ SLOTS 3 REQ.

MARK TMC PART NO.
 $\frac{1}{8}$ HIGH GOTHIC W/LATEST
 REV. LETTER.

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION			SYMBOL
		.064 THICK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK. NEW YORK			
		ALUMINUM	SHIM, SWITCH BRACKET			
		MATERIAL				
		5052-H32	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>	
		TYPE & TEMPER	DRAWN	CHECKED	FINAL APPROVAL	
		HEAT TREAT. SPEC.				
		5404-IRIDITE		<i>[Signature]</i>		MS4834 \emptyset
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES AND INCLUDE
 CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS
 .X \pm .05
 .XX \pm .01
 .XXX \pm .005

FRACTIONS
 \pm 1/64
 ANGLES
 \pm 0° 30'

TOLERANCES

SCALE 1:1

CODE A