REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4857	Ø
1	KIT 180				

STAMP TMC P/N
W/LATEST REVISION LETTER.

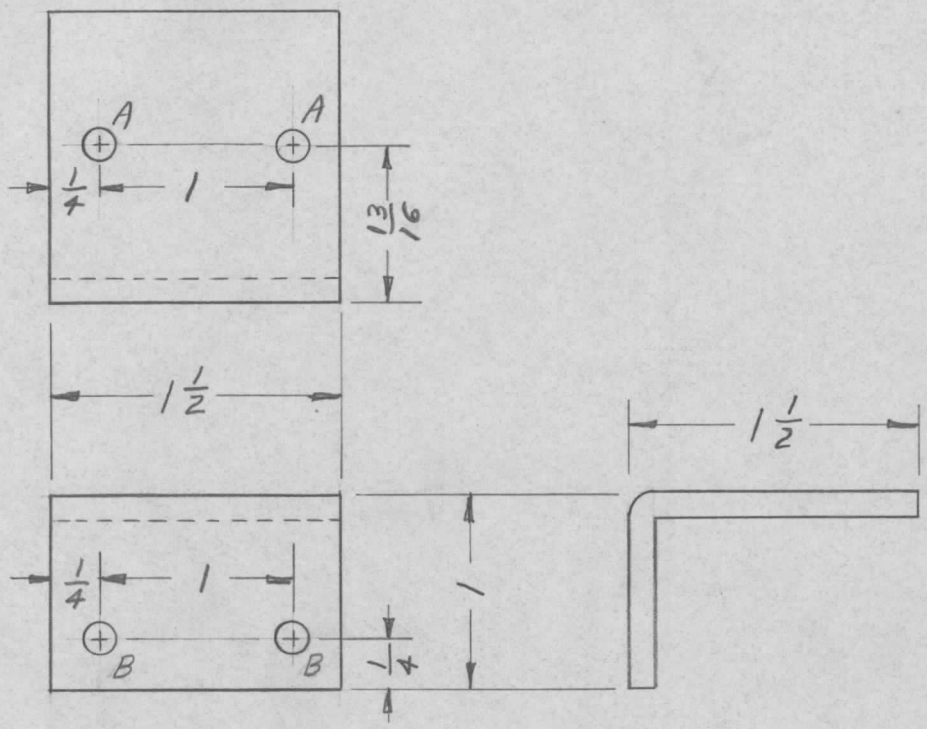

A ~ 9/64 DIA 2 REQ B ~ 13/64 DIA. 2 REQ.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	2/2/66				
X1	CHG 2 "A" Holes to "B" Holes	27 JAN 66		ØM		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	B			

STOCK SIZE

ALUMINUM 5052 H32

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

S404 YEL IRIDITE

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BRACKET, TB MTG.

DRAWN	CHECKED	FINAL APPROVAL
ØM	2/2/66	
	RJP	MS4857 Ø

ELEC. DES. APP. | MECH. DES. APP.