



A - 11/64 DIA. - 2 REQD.

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TPSG-1		3-14-66

MS-4899 A

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

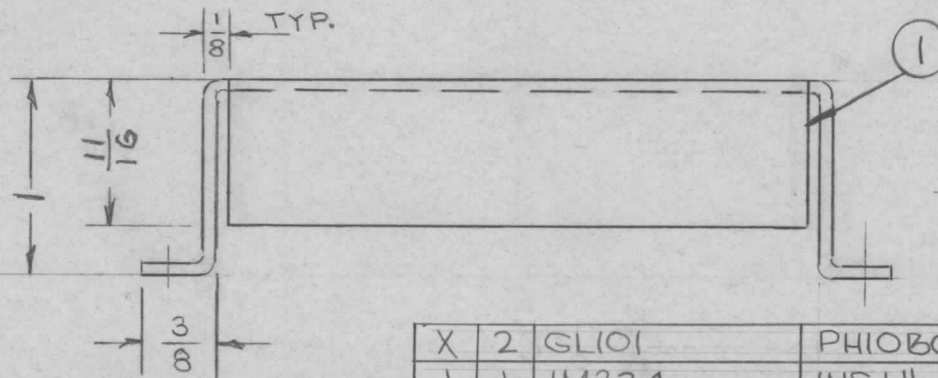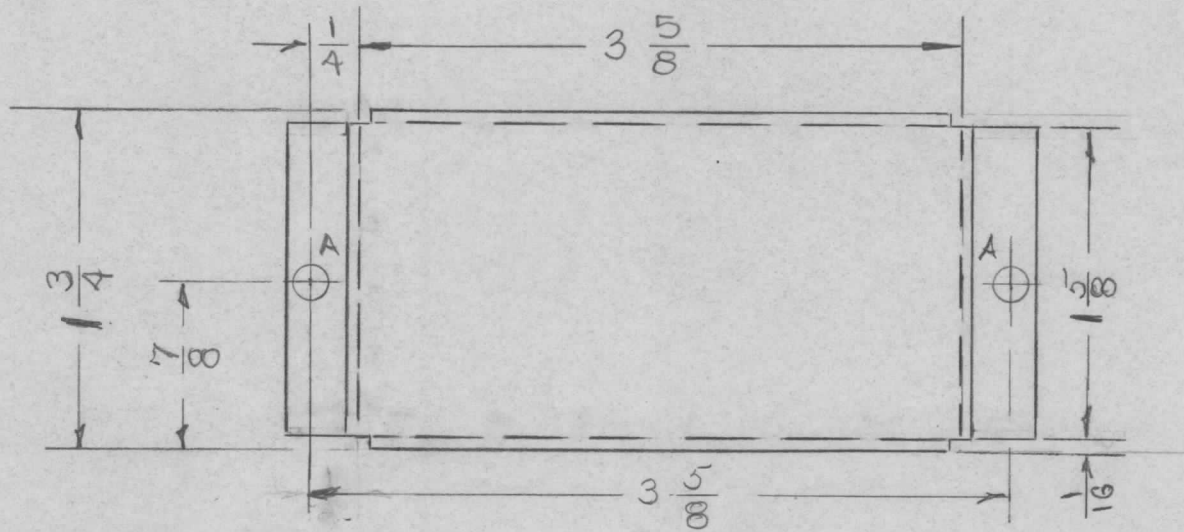

INSTALL ① INSIDE COVER WITH ②

REF LD2065

X	2	GL101	PHIOBOND	
1	1	IM234	INSULATION, FISH PAPER	
REQ. ITEM	PART NO.		DESCRIPTION	SYMBOL
	.063 ALUM.		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	COVER, FUSE
	STOCK SIZE			
	5052-N32			
	MATERIAL			
	TYPE & TEMPER		DRAWN	CHECKED
	HEAT TREAT. SPEC.		FINAL APPROVAL	
	S404 YEL. IRIDITE			
	FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
				MS-4899 A

Δ	IT. 1 & 2 ADD. NOTE ADD	10.4.66	16982	WHD	QCB	
Δ	ORIGINAL RELEASE FOR PRODUCTION			WHD		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE DO NOT SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE			