




REQ. PER UNIT	USED ON			MS4956	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TLAA-2.5K	A5543	6-6-66		

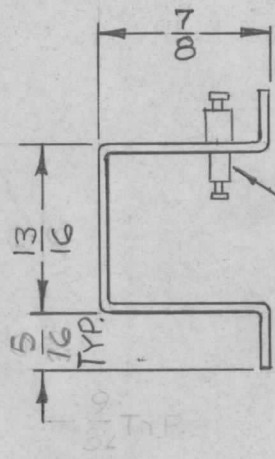

MARK TMC PT. NO. 1/8 HIGH  
GOTHIC W/ LATEST REV. LETTER

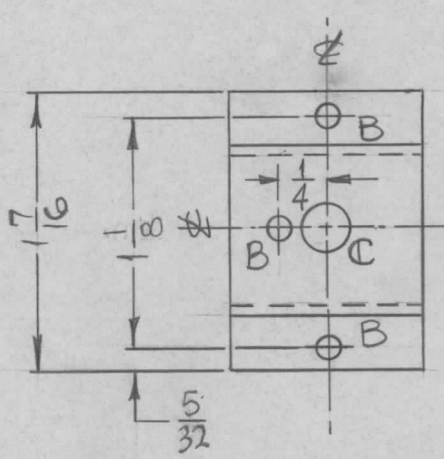

MOUNT IN ALL "A" HOLES

HOLE	DESCRIPTION	REQ'D
A	.158 $\pm .002$ DIA. THRU, C'SK 82° TO .175	2
B	1/8 DIA.	3
C	1/4 DIA.	1

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

Ø	ORIGINAL RELEASE FOR PRODUCTION	11/18/66	Ø	CV			2	1	TE169-1	TERM. FEED THRU, INS	A
X3	13/16 WAS 7/8, 1/8 WAS 3/16, 5/32 WAS 1/8	9-27-66	X3	<i>MA</i>			REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL
X2	ITEM 1 WAS TE169-3	8-4-66	X2	<i>MA</i>			.051		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X1	ITEM 1 ADDED	7-30-66	X1	<i>SPY</i>			ALUMINUM		BRACKET, ALDC		
X	EXPERIMENTAL RELEASE	6-14-66	X	<i>MA</i>	<i>CB</i>	<i>BE</i>	5052-H32		6-6-66 H.AUSTIN	<i>MA</i>	<i>MA</i>
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL		DRAWN	CHECKED	FINAL APPROVAL
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE	1:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE	S404-YELLOW IRIDITE				
						FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS4956 Ø		