


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MS-501 B

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ PER UNIT	USED ON			
	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
2	XFK.		A-602	2-16-54

DRILL THRU & TAP 4-40, 3/8 DEEP

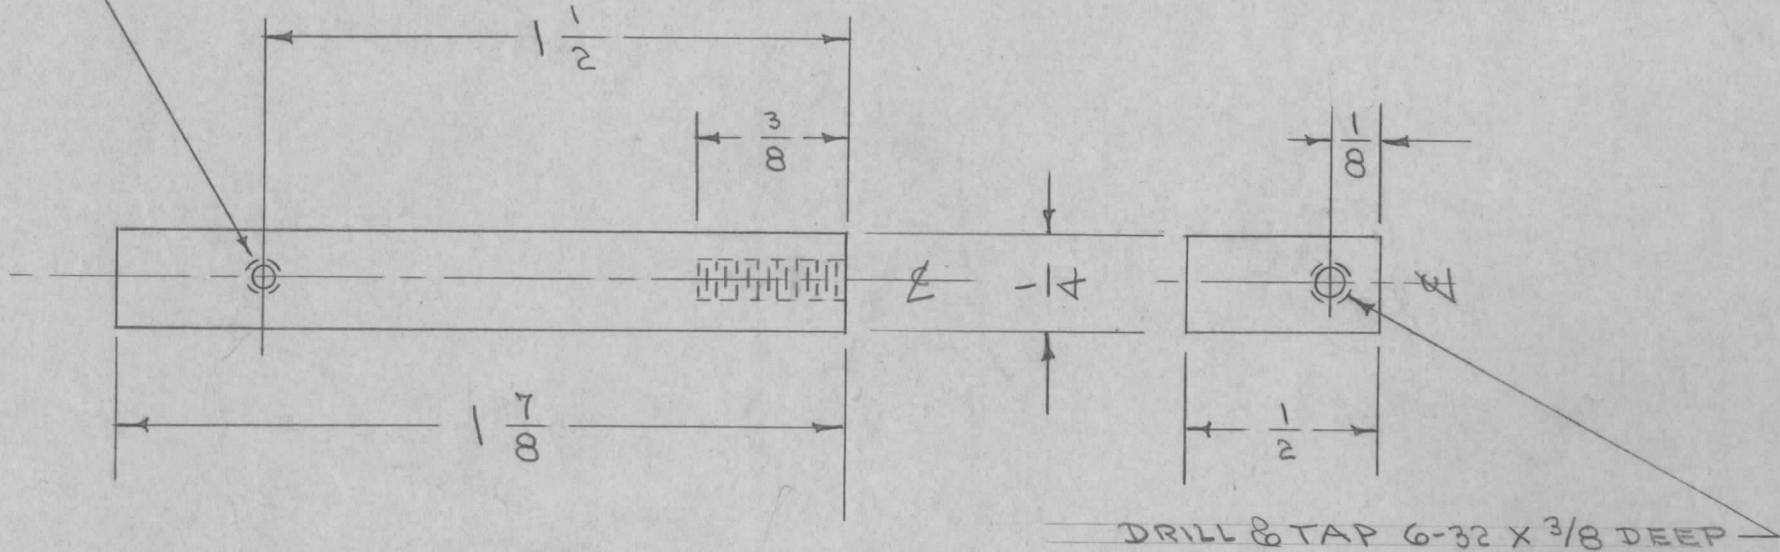

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		1/4 X 1/2	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE		
		ALUMINUM	SUPPORT, TERM. BD. #3	
		WEIGHT PER PC.		
		2AS-T4	XFK	
		TYPE & TEMPER	C.D.D. 2-16-54	
		HEAT TREAT. SPEC.	A.J.J.	WOL
		FINISH & SPEC. NO.	DRWN	ELEC. DES. APP.
			A.P.B.	A.O.J.J.
			CHECKED	MECH. DES. APP.
			FINAL APPROVAL	
			MS-501 B	

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
B	1	S-404-IRIDITE WAS S-101-CAUSTIC DIP	12-7-53	1001	P		EMN
A	1	"3/8 DEEP" Added	4/30/58	1	W		

TOLERANCES		SCALE	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ±		