


REVISIONS							
E.M.N.O.	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE	APPROVED
	44			X	EXP. RELEASE	8/7/70	
	0			Ø	ORIGINAL RELEASE FOR PRODUCTION	10/15/70	

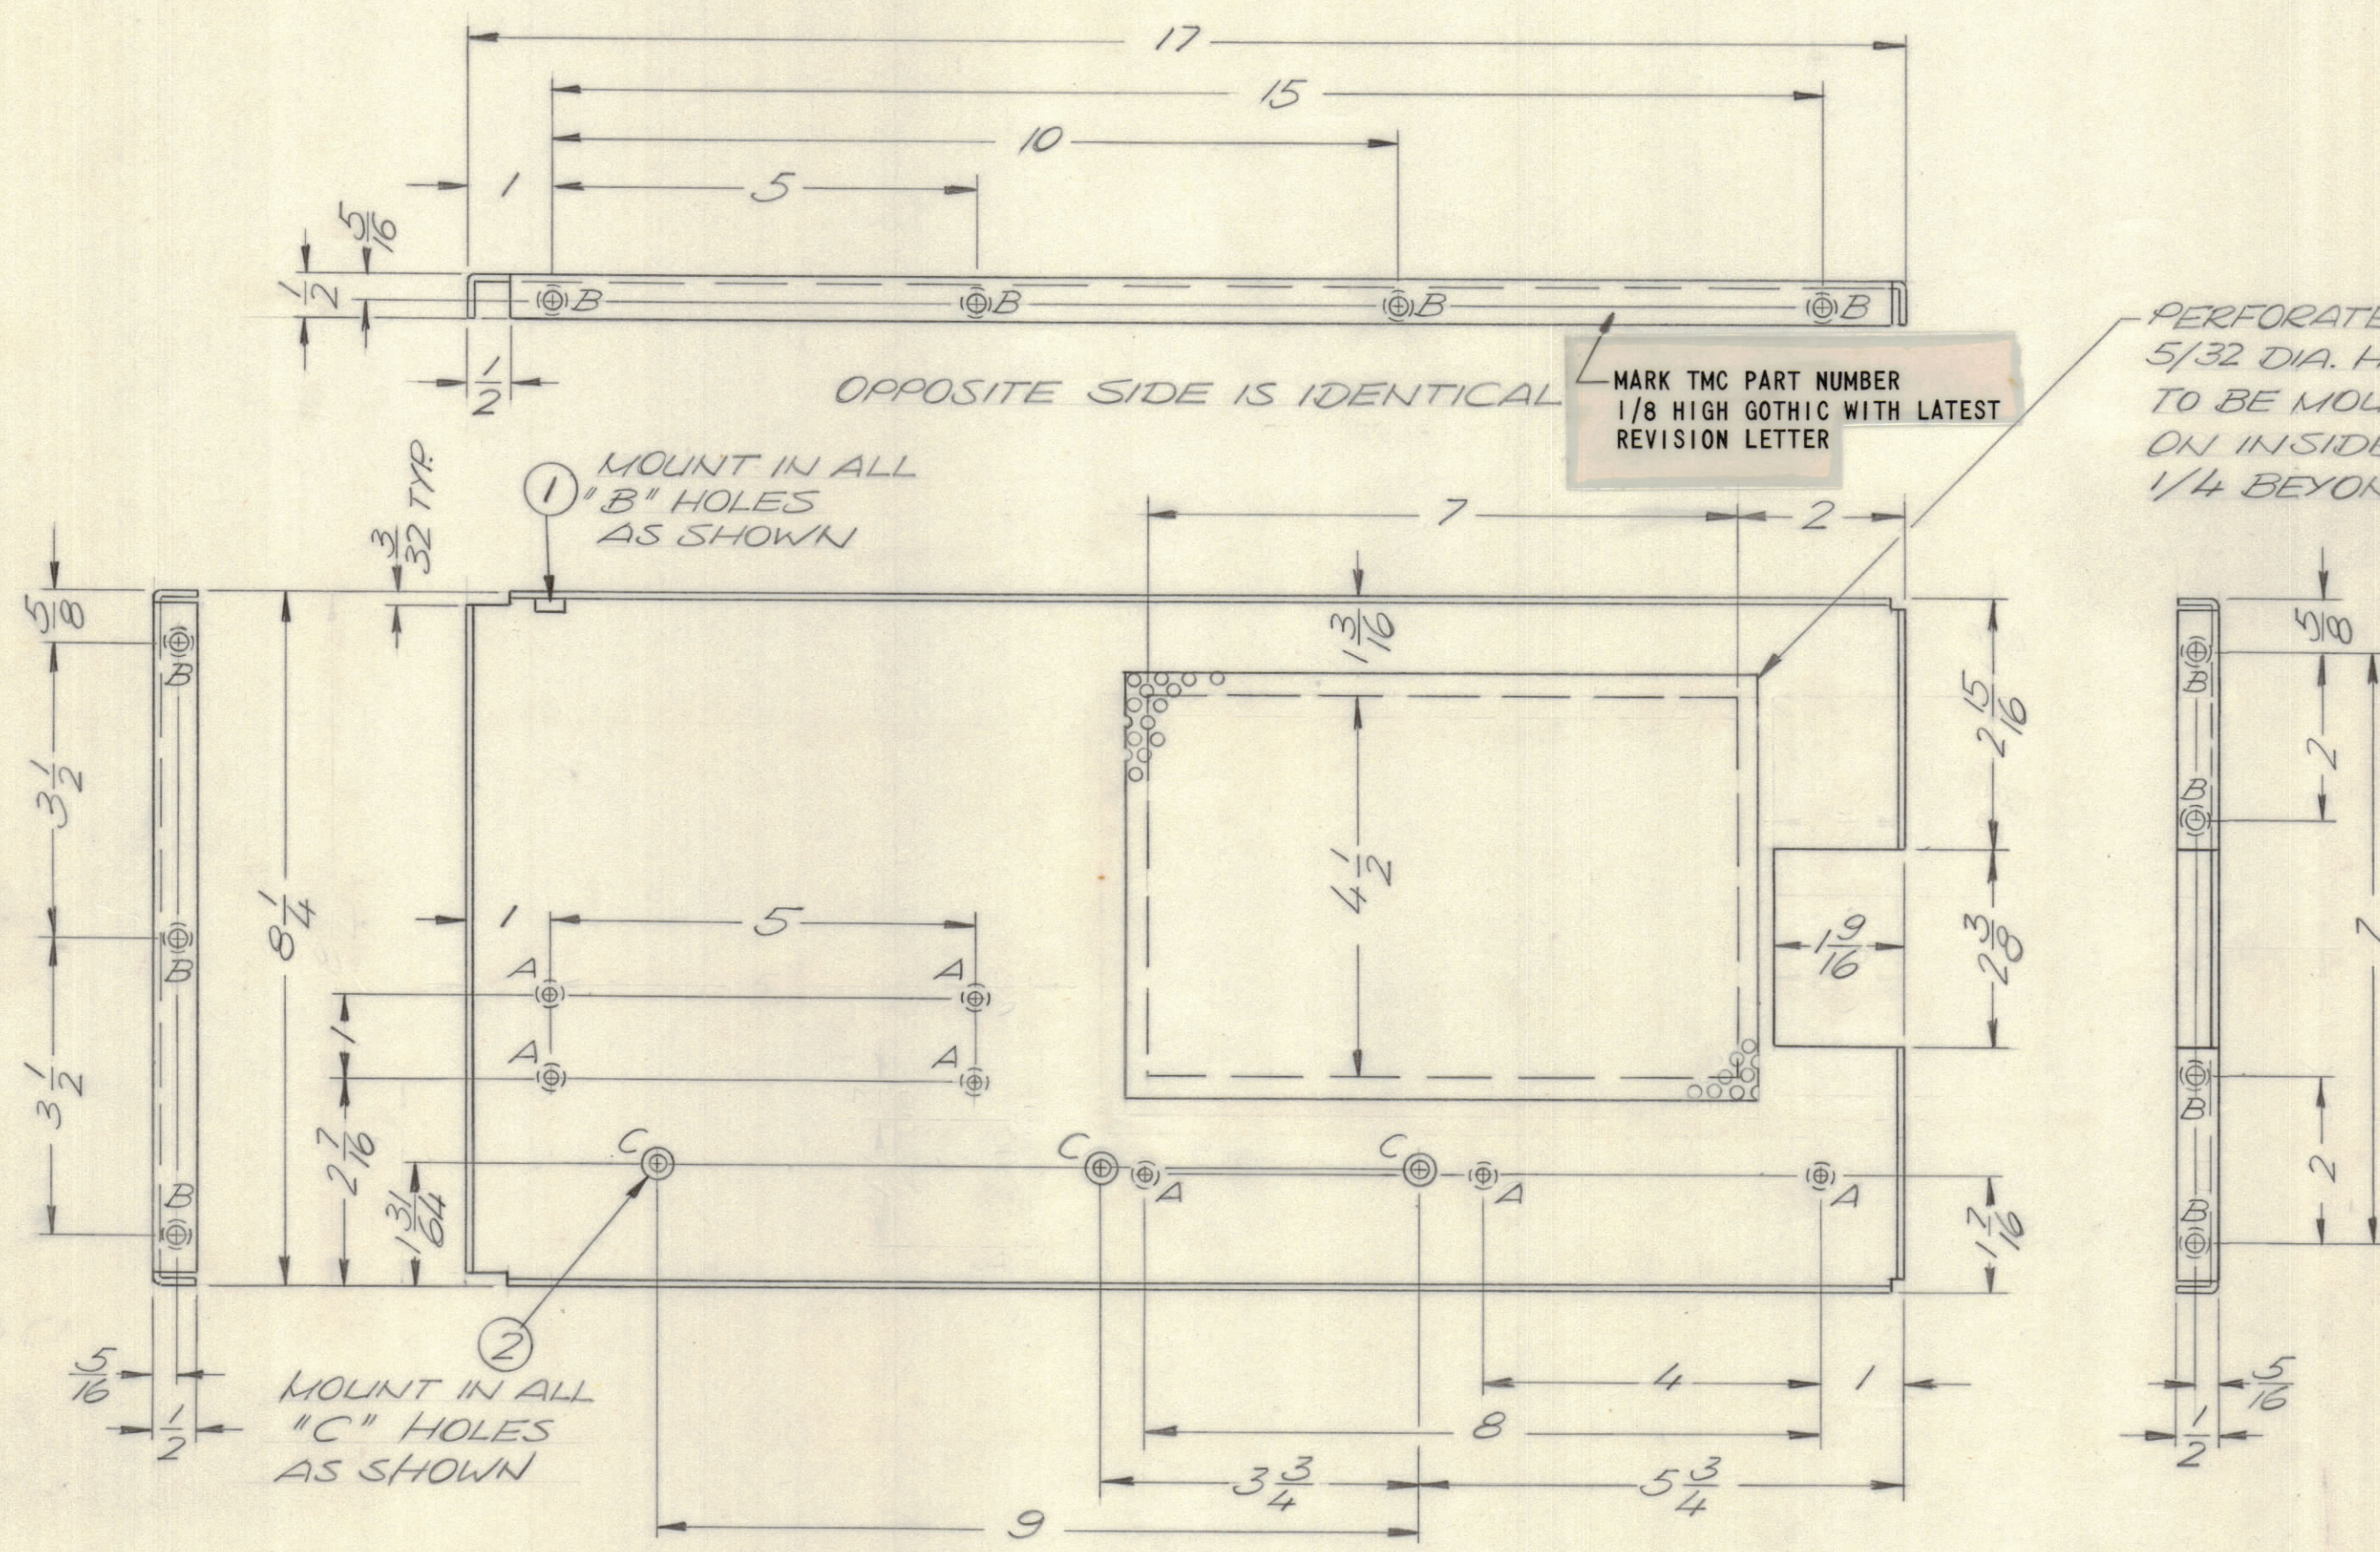

HOLE LEGEND:  
 A - 6-32 C'SINK 82° (7 REQ.)  
 B - .191 - .194 DIA. (15 REQ.)  
 C - .250-.254 DIA. (3 REQ.)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90 DEGREES.
  3. REMOVE ALL BURRS AND SHARP EDGES.
  4. MOUNT INSERTS AFTER FINISHING.

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
3	2	NT129-1032-4	NUT, ROUND, SWAGE TYPE	C
15	1	NT129-0632-4	NUT, ROUND, SWAGE TYPE	B

F. BLUETT

FINAL APPROVAL: [Signature] DATE: 14 Oct 70  
 MECH. DES.: A P DATE: 14 Oct 70  
 ELECT. DES.: DATE: [Blank]  
 CHECKED: DATE: [Blank]  
 DRAWN: [Signature] DATE: 8/7/70

LIST OF MATERIAL

THE TECHNICAL MATERIEL CORP.  
 MAMARONECK, NEW YORK

SIDE PLATE (RIGHT SIDE)

SIZE	CODE IDENT NO.	DWG NO.	ISSUE
C	82679	MS 5664	Ø

SCALE 1/2 SHEET OF

1	TLAM-1K	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		

NOTICE TO PERSONS RECEIVING THIS DRAWING  
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON  
 DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005  
 FRACTIONS: ± 1/64, ANGLES: ± 0° -30'

MATERIAL: .064 ALUM. 5052-H32  
 FINISH: SA04 YEL. IRIDITE

MS 5664 Ø 79951A