


REQ. PER UNIT	USED ON			MS-660	G
	MODEL	ASS'Y. NO.	DATE		
1 EA.	GPR(S)		12-19-55		
1 EA.	RTC		1-13-56		

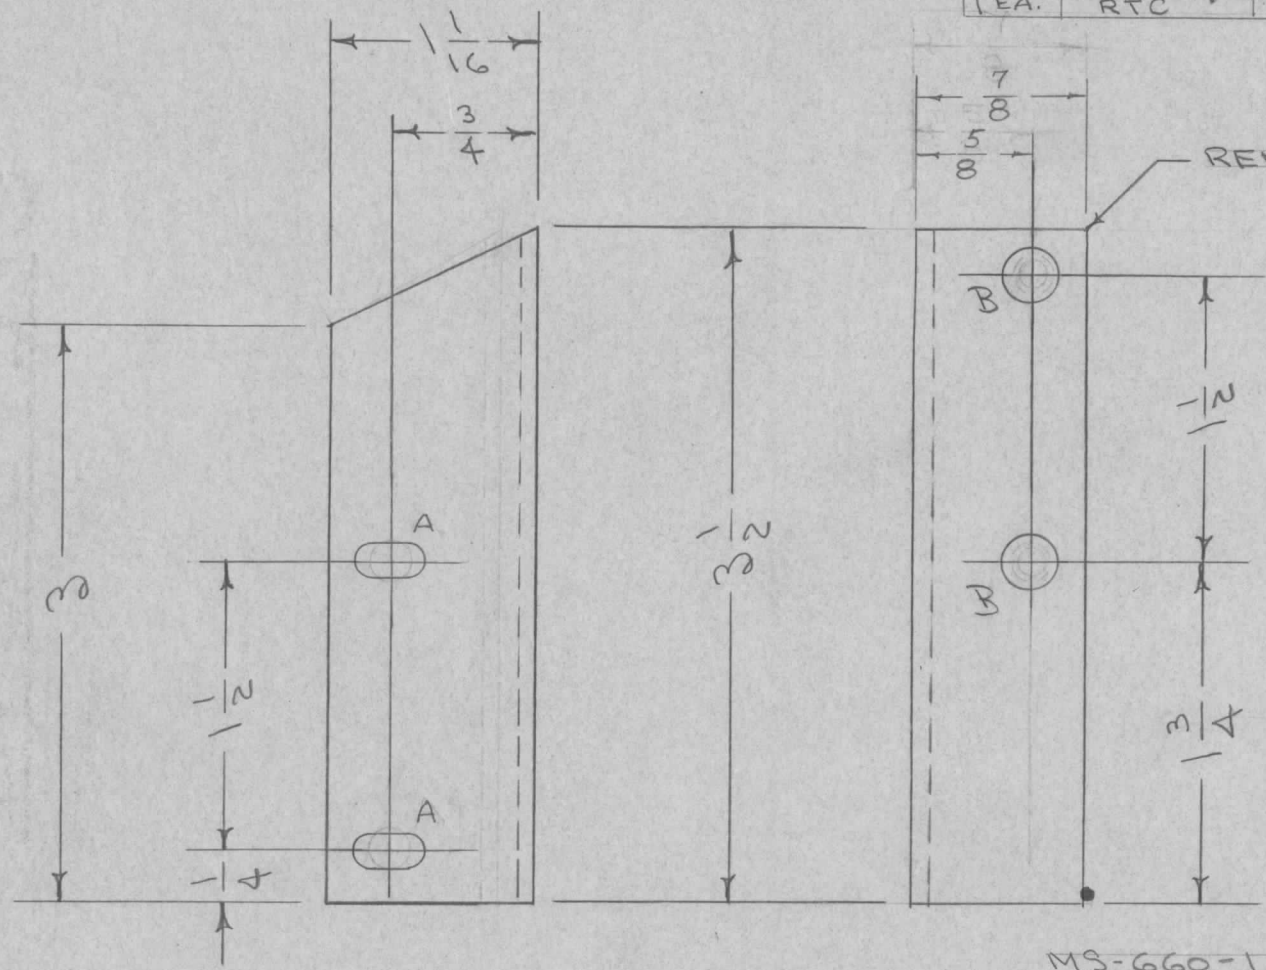

A - 13/64 X 13/32 SLOT 2 REQ.
 B - 9/32 D 2 HOLES

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		
DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE
 GUARANTEED
 2-66

MS-660-1, LEFT SIDE - AS SHOWN
 MS-660-2, RIGHT " - OPPOSITE BEND

G	1	5404 - IRIDITE WAS S101 CAUSTIC DIP	12-7 59	1001	P		EMN	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
F	1	"A" WAS 11/64 X 11/32	3-2-56	6	B	JAR	WLC		.081	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, CABINET	
E	2	9/32 D. WAS 8-32 TAP	1-13-56	5	P3	JAR	WLC		STOCK SIZE			
	1	"A" SLOTS WERE 7/32 D.							ALUMINUM			
D	1	COMPLETE REVISION	12/10/55	4	COO	HH	WLC		MATERIAL			
ISSUE ITEM		CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
TOLERANCES			SCALE:				S2S H32		EDD. 12/10/55	JAR	G.T.O.	
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				TYPE & TEMPER HEAT TREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL	
							S404 IRIDITE		HH	WLC	MS-660	G
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		