

UNLESS OTHERWISE SPECIFIED:
 1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90 DEGREES.
 3. REMOVE ALL BURRS AND SHARP EDGES.
 4. MOUNT INSERTS AFTER FINISHING.

HOLE
 A-5/32 DIA 8 READ
 B-13/64 DIA 4 READ
 C-.191-.194 DIA 8 READ




NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION.

QTY / UNIT	HTR-1K/12B
MODEL USED ON	AX 806
ASSY NO.	
APPLICATION	
CODE	

MATERIAL .063 THK ALUM-5052-H32
FINISH S404 YEL-12IDITE
TOLERANCES ON DECIMALS FRACTIONS X ± .05 XX ± .01 XXX ± .005 ± 0° -30'
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

FINAL APPROVAL	DATE
MECH. DES.	DATE
ELECT. DES.	DATE
CHECKED	DATE
DRAWN	DATE
G.D.L.	3-17-82
SIZE	D
CODE IDENT NO.	82679
DWG NO.	MS7075
ISSUE	
SHEET	1

QTY	ITEM	PART NO.	DESCRIPTION	SYMBOL
8	1	NT 129-632-4	NUT ROUND	C

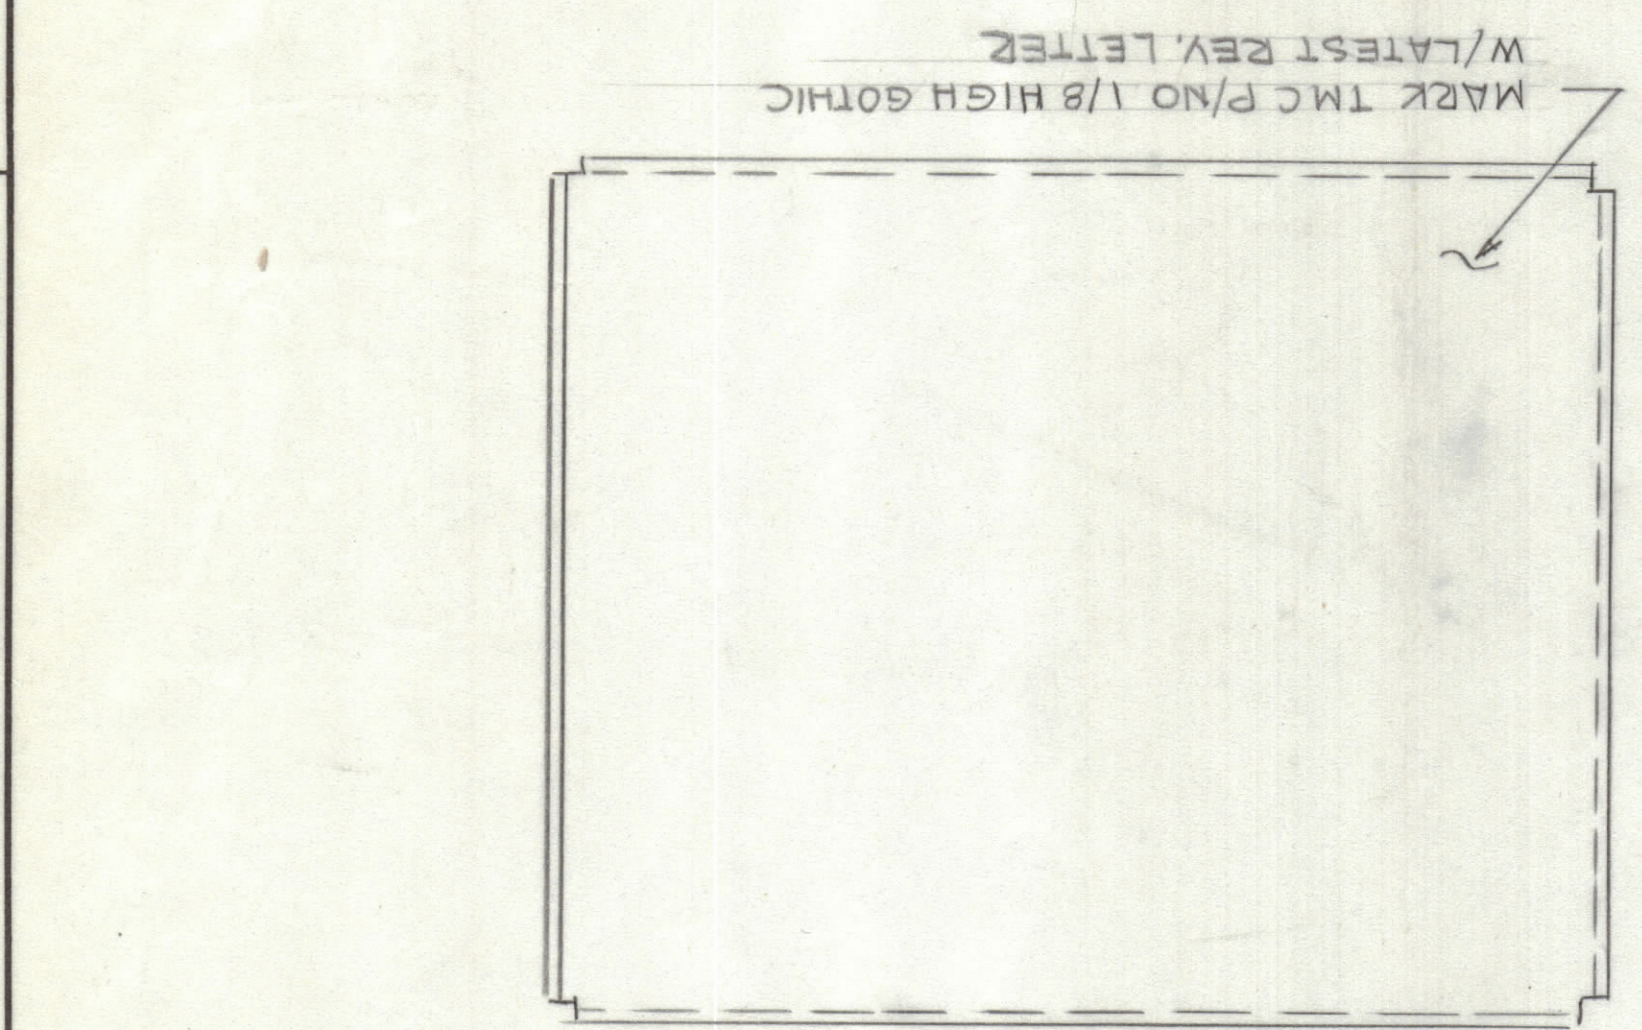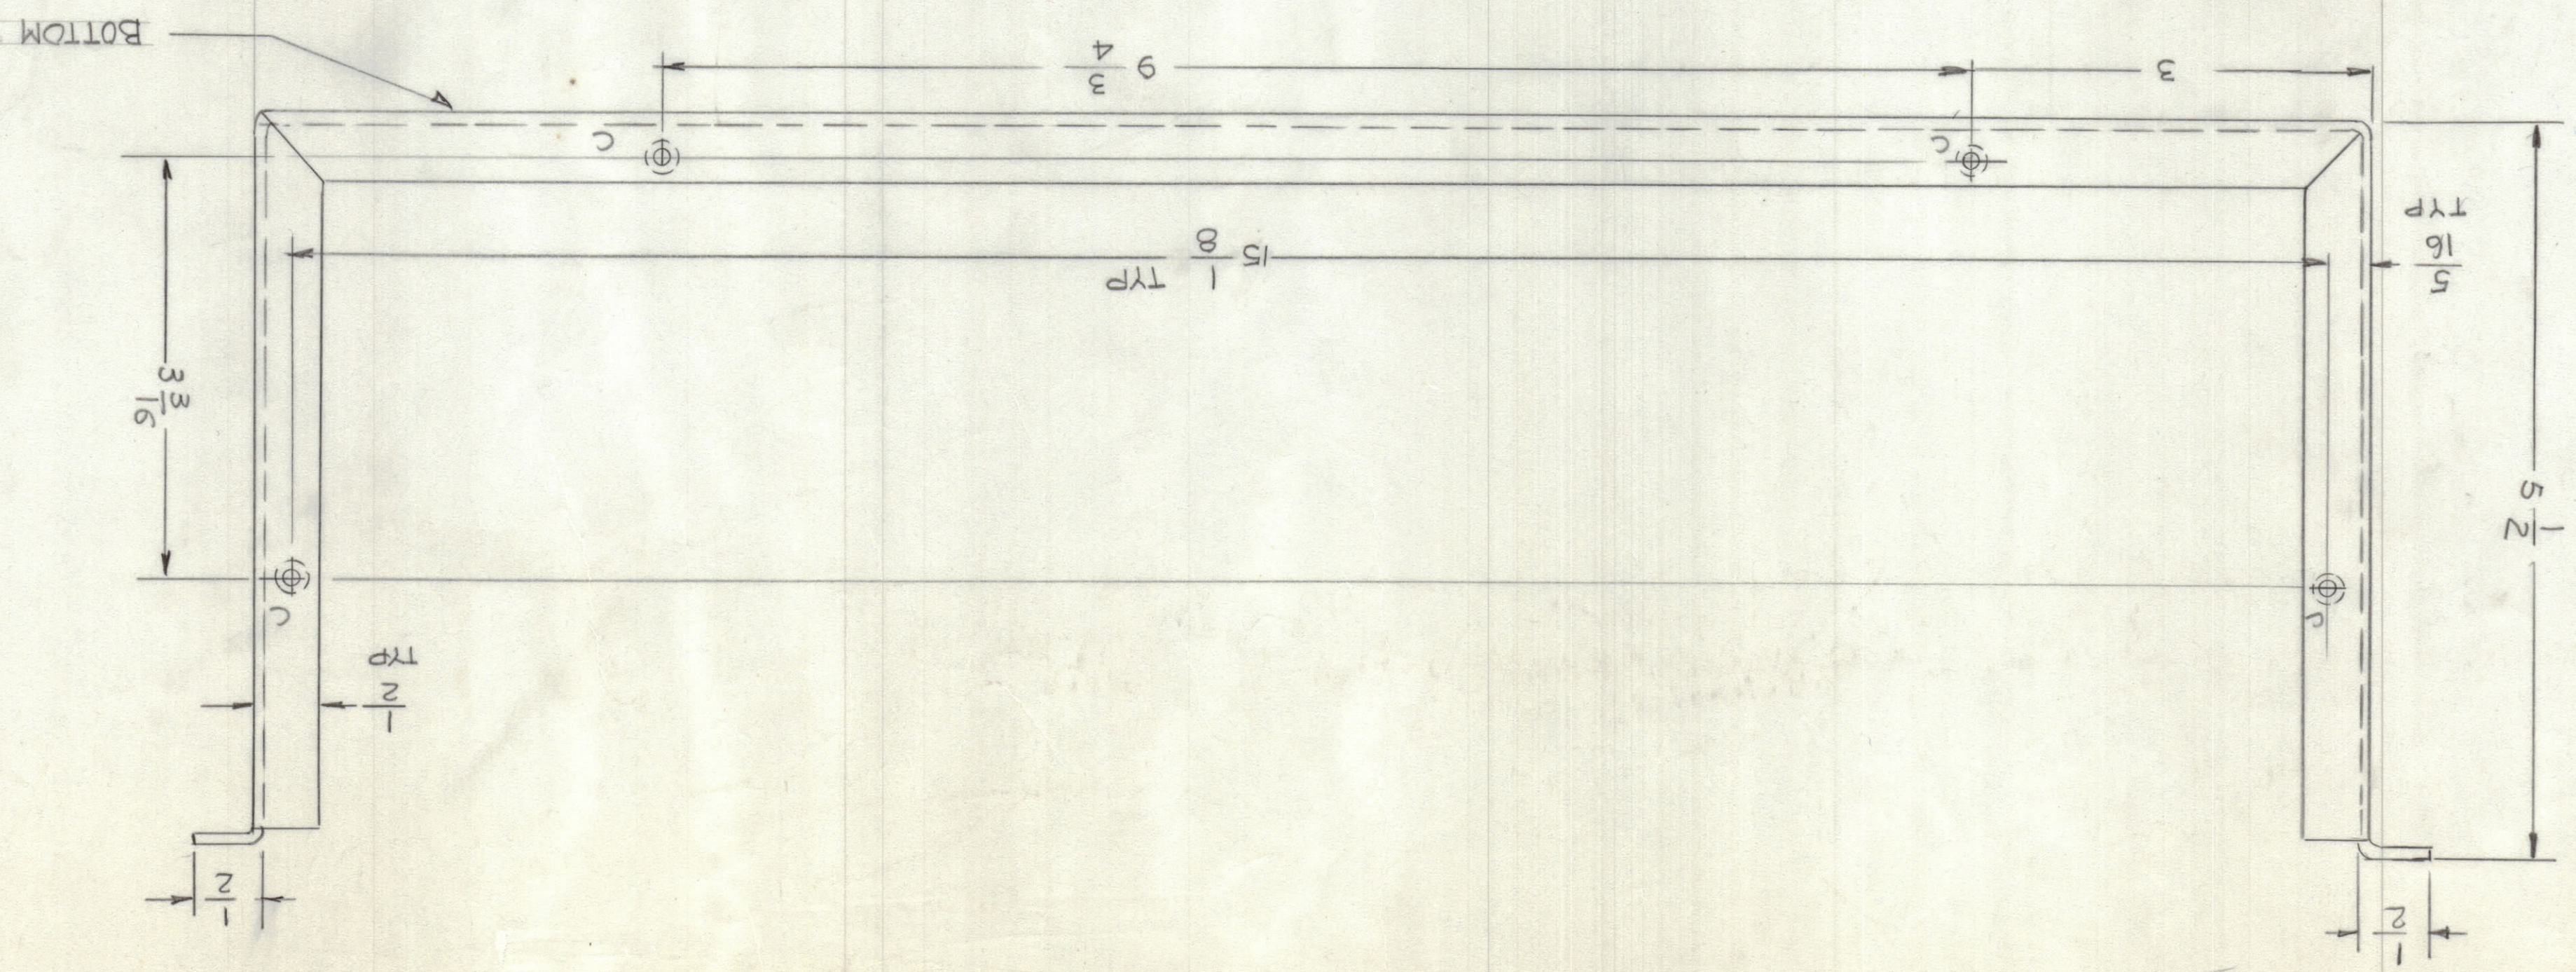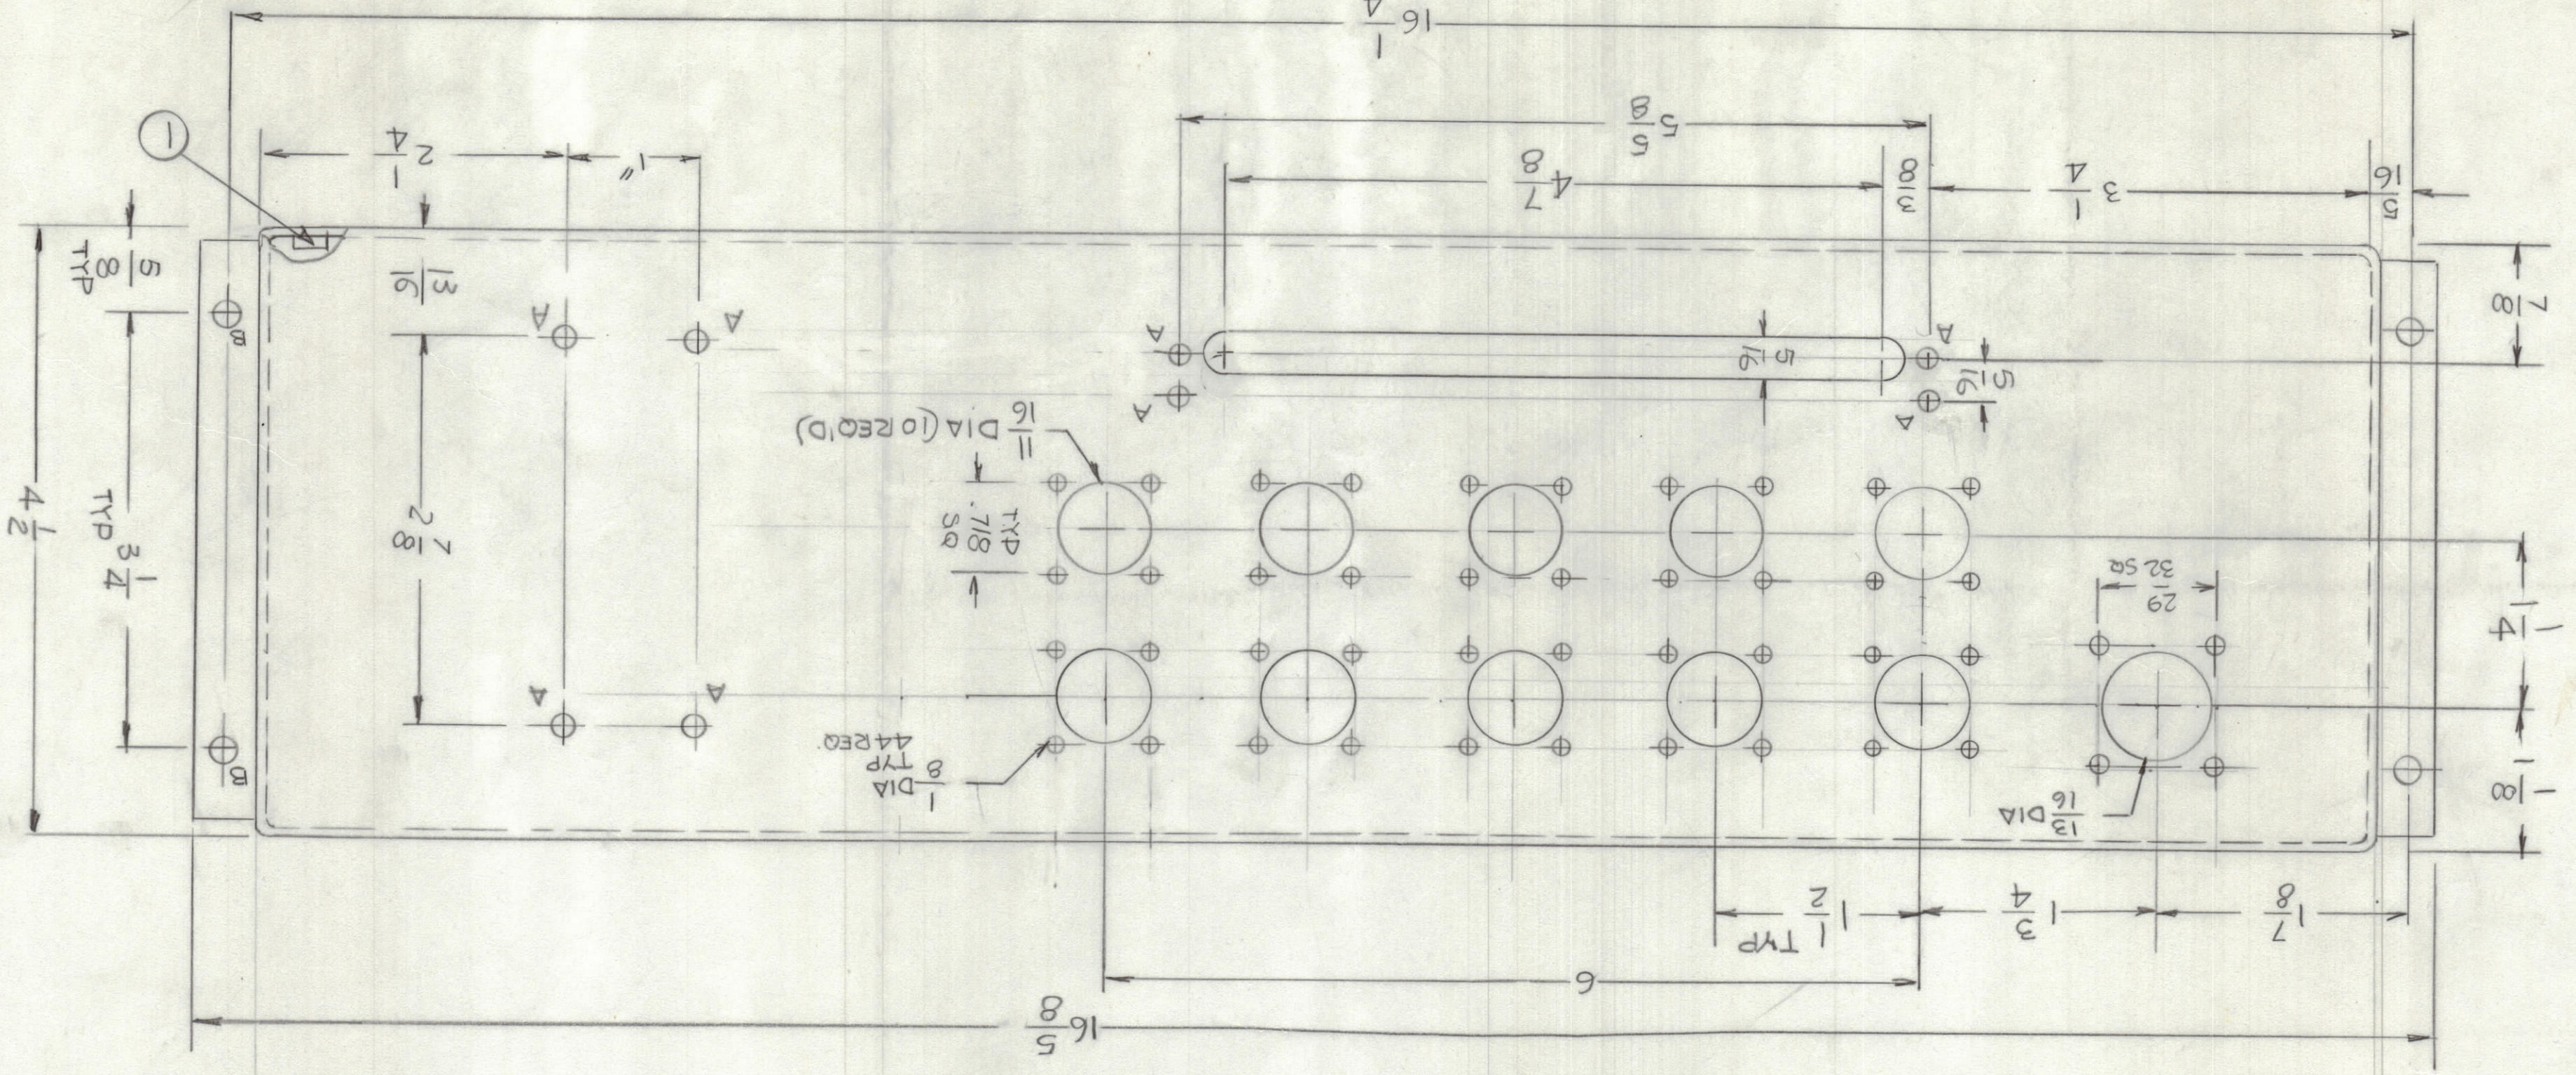

REVISIONS	DESCRIPTION	DATE	APPROVED
1	ORIGINAL RELEASE	2-16-83	

EM	NO	DRAFT	CHKD	ZONE	LTR