
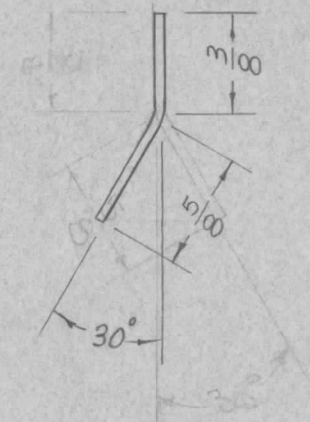


REQ. PER UNIT	USED ON			MS-725	B
	MODEL	ASS'Y. NO.	DATE		
1	RTF	P/A	10-3-55		
1	RTF-2	P/A	11/20/58		

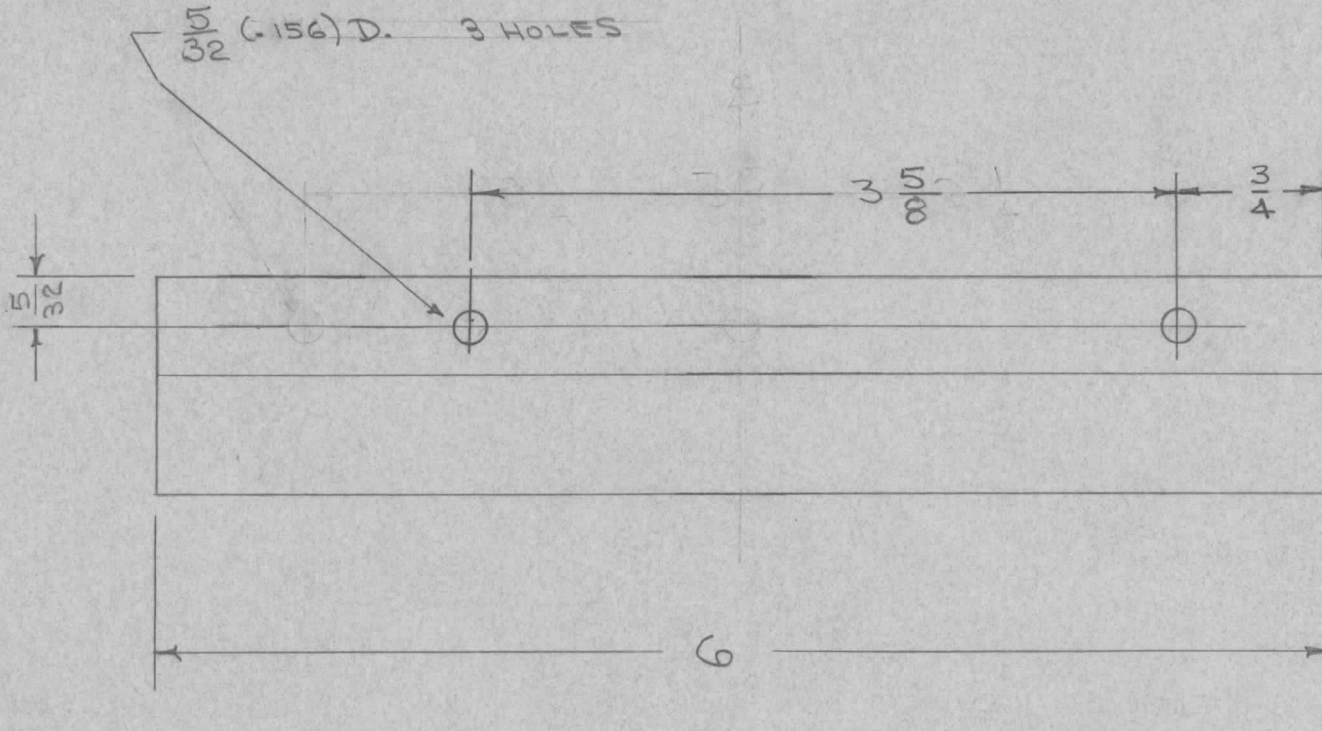

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
										THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	B		
B	1	S404 - IRIDITE WAS S101 - CAUSTIC DIP	12-7 59	1001	P		EMN		.051	BAFFLE, SIDE PLATE			
A	1	5/32 WAS 3/16	3/21/56	1	B	ME	WE		ALUMINUM	POW / AMP			
TOLERANCES								SCALE:					
DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ± 1°								MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					
								52S H32		CDD-10-3-55	FAIDe	WE	
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
								S404-IRIDITE		1/11/66	WE	MS-725	B
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			