

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

MODEL

USED ON

ASS'Y. NO.

DATE

1

AX-104

GPT-10K

5-3-62


NP-474 A

FINISH:
REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595
COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY T M C. OR

WHERE PURCHASING REQUIREMENT IS SUFFICIENTLY LARGE, ORDER NUMBER SHALL BE ETCHED BY VENDOR IN LIEU OF ORDER NUMBER BLOCK (SEE CHART FOR PROPER NUMBER).

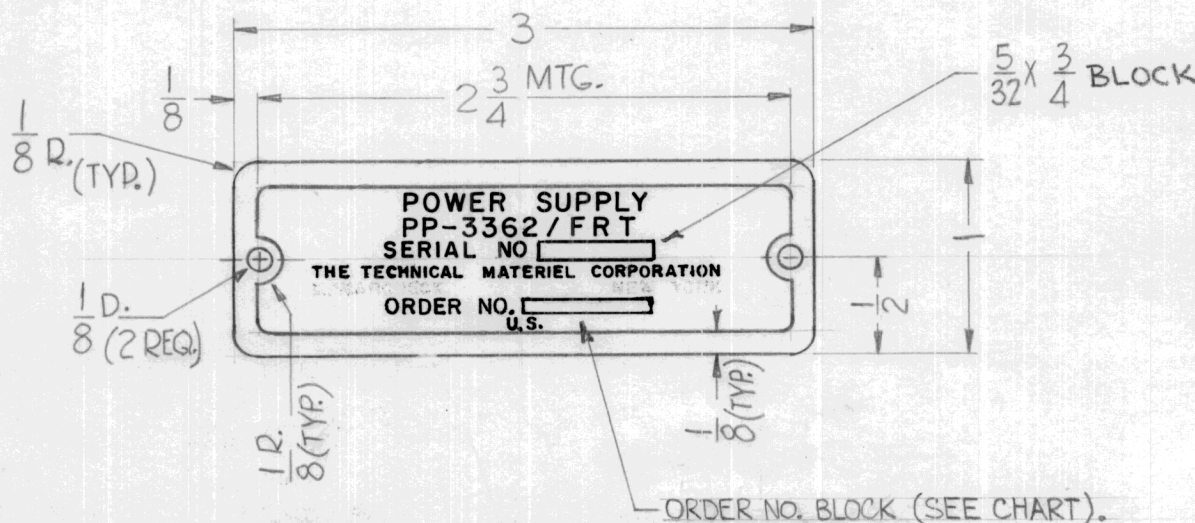

TMC NO.	ORDER NO. BLOCK	ORDER NO. (ETCHED BY VENDOR)
NP-474-1	5/32 X 1-1/8 Block	No Order Number
NP-474-2	No Block	18002-PP-62

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
			.032 THK.		
			STOCK SIZE		
A	MAM'K, N.Y. DELETED ON PICTORIAL	72862 11955	ALUMINUM	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	
			CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED:		SCALE: DO NOT SCALE			
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.			
TOLERANCES ON		REMOVE ALL BURRS AND SHARP EDGES			
FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°		250	TYPE & TEMPER	HEATTREAT. SPEC.	
		SEE NOTE			
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
					NP-474 A