


THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	USED ON			NP-486	A
	MODEL	ASS'Y. NO.	DATE		
	AX-357	GPT-10K(R)	5-23-62		

TMC NO.	ORDER NO. BLOCK	ORDER NO. (ETCHED BY VENDOR)
NP-480-1	5/32 x 1-1/8	No Order Number
NP-480-2	No Block	18002-PP-62

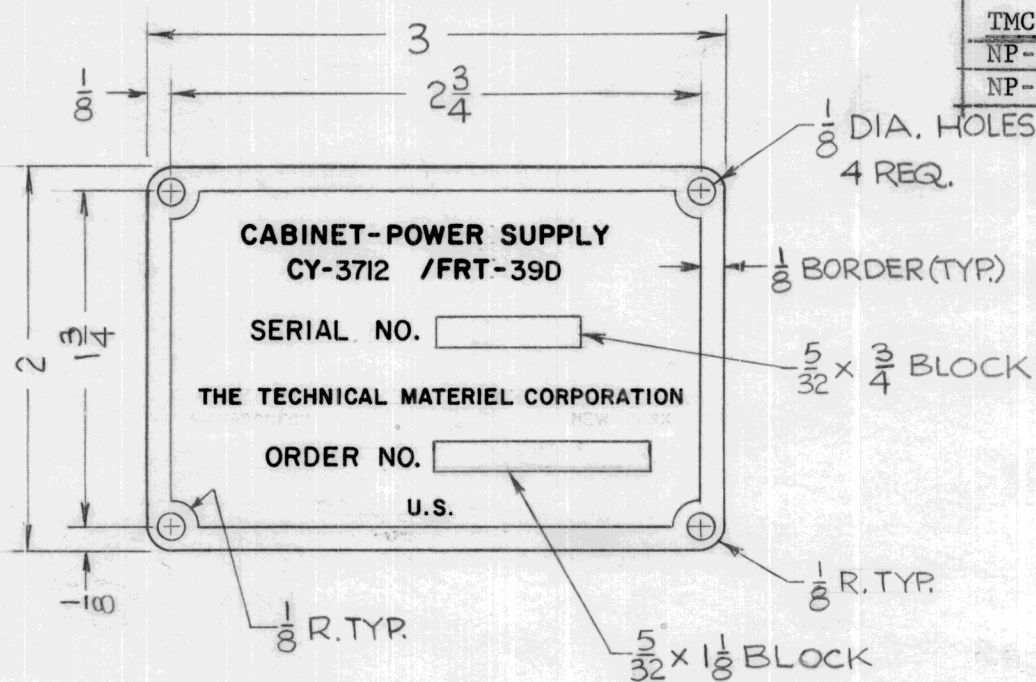

FINISH:
 REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038)
 PER FED. STD. NO. 595
 COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC
 OR
 WHERE PURCHASING REQUIREMENT IS SUFFICIENTLY LARGE, ORDER NUMBER SHALL BE ETCHED BY VENDOR IN LIEU OF ORDER NUMBER BLOCK (SEE CHART FOR PROPER NUMBER).

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A

(REF. SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	A
		STOCK SIZE		
		ALUMINUM	NAMEPLATE IDENTIFICATION	
		MATERIAL		
250			V.R.R.	
		TYPE & TEMPER	DRAWN	CHECKED
		HEATTREAT.SPEC.		FINAL APPROVAL
		SEE NOTE		NP-486
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES.
 TOLERANCES ON
 FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°

SCALE:
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
 REMOVE ALL BURRS AND SHARP EDGES