


| | | | | | |
|---------------|---------|------------|---------|--------|---|
| REQ. PER UNIT | USED ON | | | NP-609 | A |
| | MODEL | ASS'Y. NO. | DATE | | |
| | MSR-5 | | 9-20-63 | | |

FINISH: Reverse etch, anodized on lusterless black background (Type 37038) per Fed. Std. No. 595.
Colorless Varnish per MIL-V-6894

Minimum letter size - 3/64 in. high.

Applicable order and serial number will be steel stamped by TMC

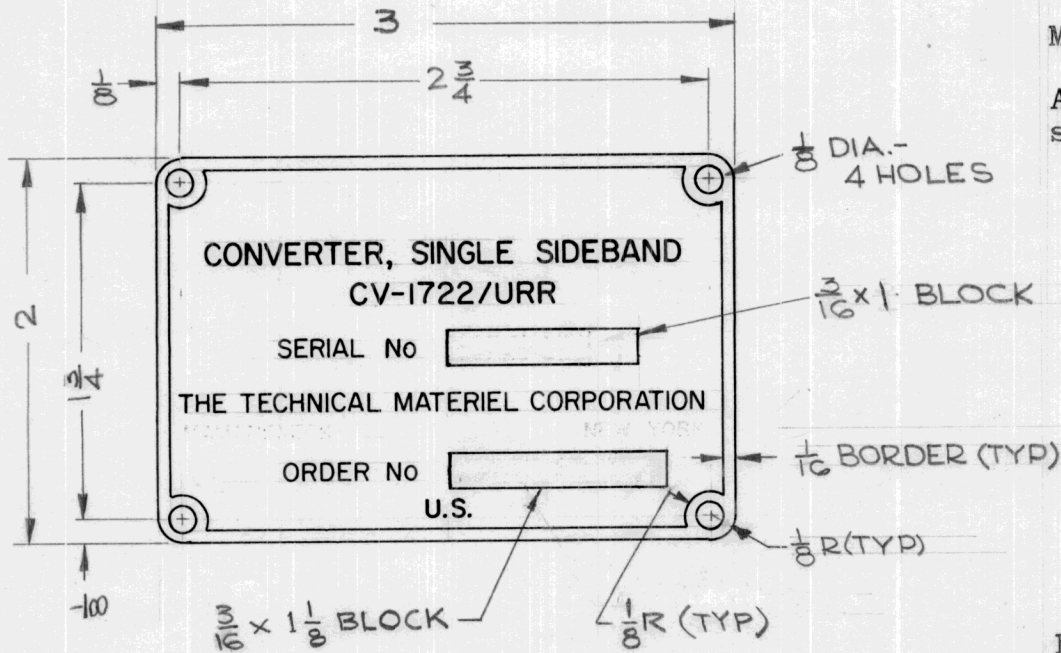

Nameplate to be in accordance with MIL-STD-130 and MIL-M-13231A.
(Ref. Signal Corps)

| REQ. | ITEM | PART NO. | DESCRIPTION | | | | SYMBOL |
|---|---------------------------------|---|--|-----------------|----------|----------------|--------|
| | | 0.032 | THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK | | | | |
| | | STOCK SIZE | NAMEPLATE, IDENTIFICATION | | | | |
| | | Aluminum | MSR-5 | | | | |
| | | MATERIAL | | | | | |
| A | MAMK, N.Y. DELETED ON PICTORIAL | 28-64 11955 | | | | | |
| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | SCALE | Do Not Scale | | | | |
| DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 | TOLERANCES | FRACTIONS ± 1/64 ANGLES ± 0° 30' | CODE | | | | |
| | | 5052-H32 | | | 9-19-63 | BP | |
| | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL | |
| | | See Note Above | | | | | |
| | | FINISH & SPEC. NO. | ELEC. DES. APP. | MECH. DES. APP. | NP-609 A | | |