


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TTR-10	AX-418	9-5-63

NP-606 B

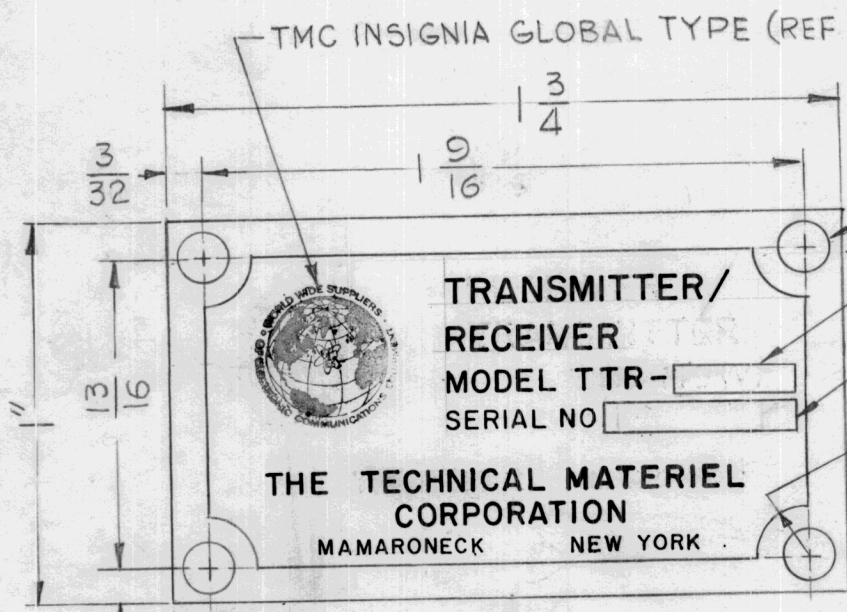


- 1/8 DIA. (4 REQ.)
- 3/32 x 5/16 BLOCK
- 3/32 x 1/2 BLOCK
- 1/8 R. (4 PL.)

SCALE 2:1

FINISH NOTE:
BLACK MATTE BACKGROUND
AND CLEAR LACQUER

NOTES:
TYPE FACE: SPARTAN MEDIUM
SIZE TO FIT SPACE & LAYOUT
MINIMUM LETTER: 3/64 IN. HIGH
APPLICABLE SERIAL NO WILL BE STEEL
STAMPED BY TMC.

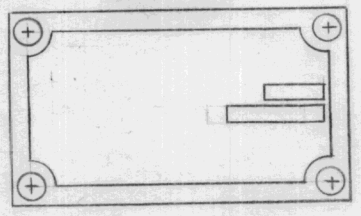

TRUE SIZE

REQ.	ITEM	PART NO.		DESCRIPTION	SYMBOL	
				KOHN E3037		
		.032 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	NAMEPLATE, IDENTIFICATION	
		STOCK SIZE				
B	3/32 X 5/16 BLOCK ADDED "O(V) DELETED	2.14.67	17825	WFO		
A	SER. BLK. WAS 3/32 X 3/8	2.16.65	13491	Z.F.		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE		
TOLERANCES		FINISH & SPEC. NO.				
		250		G.D.L.		
		TYPE & TEMPER		HEAT TREAT. SPEC.		
		SEE NOTE		DRAWN		
				CHECKED		
				ELEC. DES. APP.		
				MECH. DES. APP.		
						NP-606 B

REQ. PER UNIT	USED ON			NP-608	A
	MODEL	ASS'Y. NO.	DATE		
	RAK-21		9-19-63		


NOTE:

FINISH: REVERSE ETCH, ANODIZED ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894.

TYPE FACE: SPARTAN MEDIUM. SIZE TO FIT SPACE AND LAYOUT. MINIMUM LETTER SIZE - 3/64 IN. HIGH.

APPLICABLE ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A. (REF. SIGNAL CORPS)

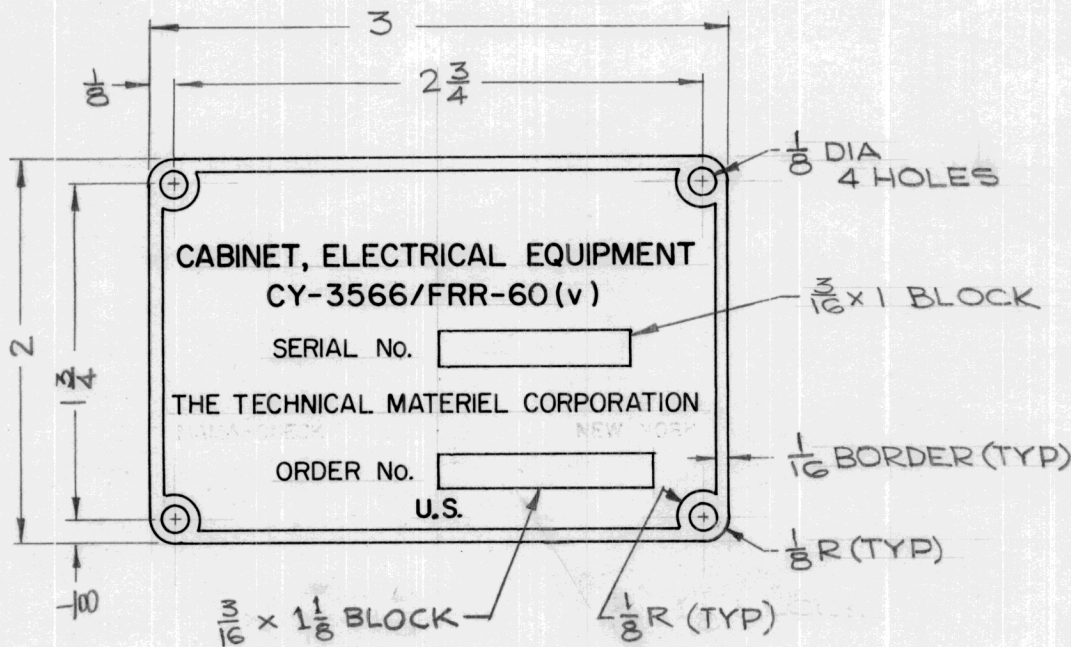

NOTE:

(v) LOWER CASE


REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		0.032 THK	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK, NEW YORK				
		Aluminum	NAMEPLATE, IDENTIFICATION				
A	MAM'R, N.Y. DELETED ON PICTORIAL	728-64/11955					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE Do Not Scale				5052-H32	
	TOLERANCES	CODE				See Notes	
	.X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'				FINISH & SPEC. NO.	
							ELEC. DES. APP. MECH. DES. APP.
							NP-608 A

REQ. PER UNIT	USED ON			NP-609	A
	MODEL	ASS'Y. NO.	DATE		
	MSR-5		9-20-63		

FINISH: Reverse etch, anodized on lusterless black background (Type 37038) per Fed. Std. No. 595.
Colorless Varnish per MIL-V-6894

Minimum letter size - 3/64 in. high.


Applicable order and serial number will be steel stamped by TMC

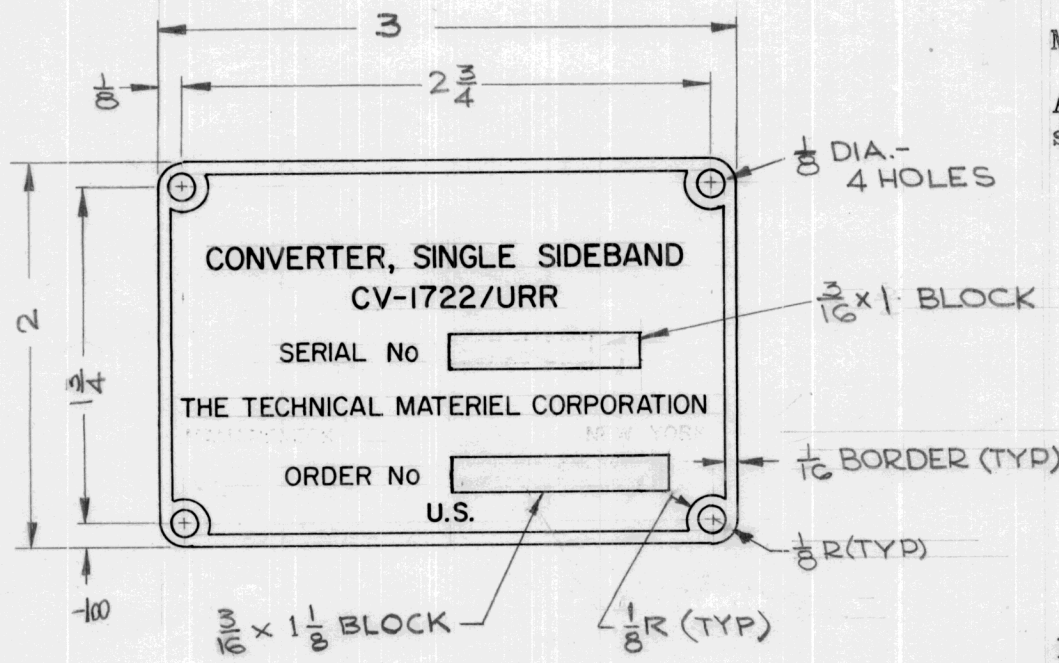

Nameplate to be in accordance with MIL-STD-130 and MIL-M-13231A.
(Ref. Signal Corps)

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		0.032	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK				
		STOCK SIZE	NAMEPLATE, IDENTIFICATION				
		Aluminum	MSR-5				
		MATERIAL					
A	MAMK, N.Y. DELETED ON PICTORIAL	28-64	11955				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		Do Not Scale			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE				
		5052-H32		DRAWN		CHECKED	FINAL APPROVAL
		TYPE & TEMPER		HEAT TREAT. SPEC.			
		See Note Above		ELEC. DES. APP.		MECH. DES. APP.	
		FINISH & SPEC. NO.				NP-609 A	

REQ. PER UNIT	USED ON			NP-610
	MODEL	ASS'Y. NO.	DATE	

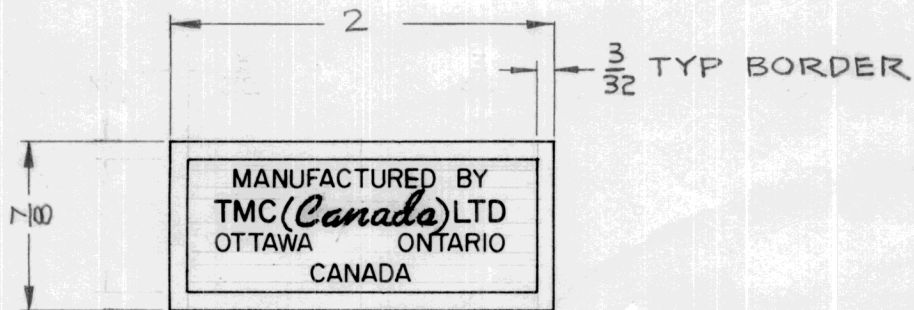



NOTE:

ALUMINUM COLORED LETTERING ON LUSTERLESS BLACK BACKGROUND. SUPPLIED WITH #583 ADHESIVE BACKING.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.003 TO .005	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK. NEW YORK				
		ALUMINUM FOIL	NAMEPLATE, MFGR. IDENTIFICATION				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	Do Not Scale				ANODIZED
							TYPE & TEMPER HEAT TREAT. SPEC.
							DRAWN
							CHECKED
							FINAL APPROVAL
							SEE NOTE
							FINISH & SPEC. NO.
							ELEC. DES. APP. MECH. DES. APP.
							NP-610

REQ. PER UNIT	USED ON			NP 611	O
	MODEL	ASS'Y. NO.	DATE		
1	VLR-1		10-7-63		

TMC GLOBAL INSIGNIA.

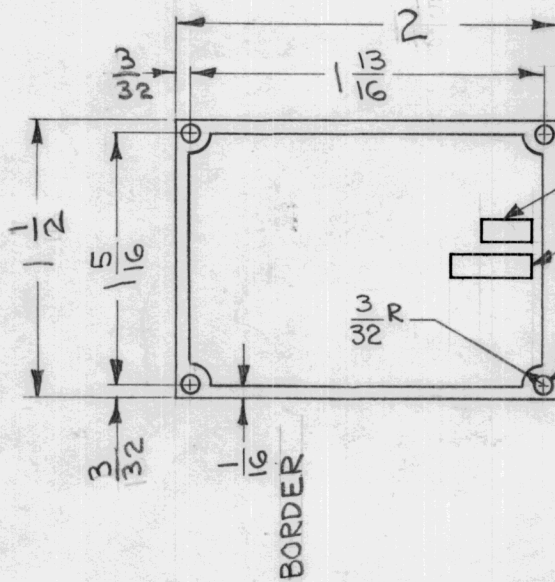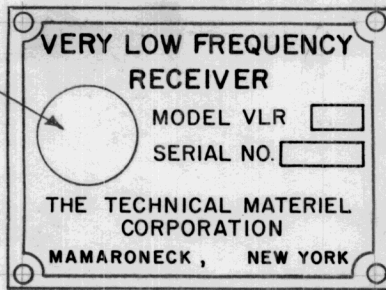

MODEL BLOCK 1/8 x 1/4

SERIAL NO BLOCK 1/8 x 7/16

4 HOLES 3/32 DIA.

NOTES:

FINISH: REVERSE ETCH, ANODIZED ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STANDARD NUMBER 595. COLORLESS VARNISH PER MIL-V-6894.

TYPE FACE: SPARTAN MEDIUM. SIZE TO FIT SPACE AND LAYOUT. MINIMUM LETTER SIZE- 3/64 HIGH.

APPLICABLE MODEL AND SERIAL NO. WILL BE STAMPED BY TMC.

NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH MIL-P-15024B, TYPE A, 17 JAN. 1957.

REQ.	ITEM	PART NO.	M. GELLMAN			DESCRIPTION	SYMBOL			
0	ORIGINAL RELEASE FOR PRODUCTION	5-11-64	0	A.M.	@	.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
X2	OVERALL DIM. CHGD.	1/10/64	X2	<i>hde</i>		STOCK SIZE				
X1	3/32 HOLES WERE .076D TYPE + TEMPER WAS 250	1/9/64	X1	GDL	<i>hde</i>	ALUMINUM	NAMEPLATE, IDENTIFICATION			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			5052-H32	<i>G. Leman</i>	<i>COO</i>	<i>RJC</i>	
						TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	SEE NOTES			<i>W</i>	<i>W</i>	NP 611	O
						FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

4

MODEL

MNF-1

USED ON


ASS'Y. NO.

DATE

4-18-63

NP-613

A

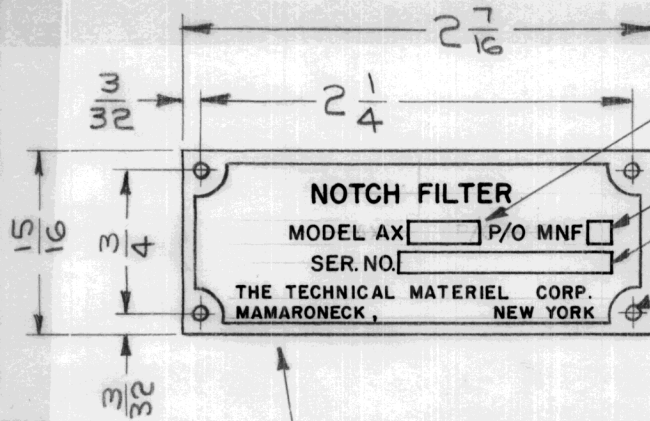

BLOCK 1/8 x 3/8

BLOCK 1/8 x 1/8

BLOCK 1/8 x 1 1/8

1/8 DIA. (4 REQ.)

TMC INSIGNIA (GLOBAL TYPE)



FINISH NOTE:

BLACK MATTE BACKGROUND & CLEAR LACQUER.

LETTERING TO BE SPARTAN MEDIUM, MINIMUM HEIGHT 3/64".


						REQ.	ITEM	PART NO.	AALTONEN DESCRIPTION	SYMBOL		
								.032 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	NAMEPLATE, IDENTIFICATION		
								STOCK SIZE				
								ALUMINUM				
								MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE	5052-H32					
						F1:1	DRAWN CHECKED FINAL APPROVAL					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005						TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE	5052-H32	
						A	SEE NOTE		DRAWN CHECKED FINAL APPROVAL			
						FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.		NP-613 A		

REQ. PER UNIT	USED ON			NP-614	A
	MODEL	ASS'Y. NO.	DATE		
	XFK-2				

FINISH: Reverse etch, anodize on lusterless black background (Type 37038) per Fed. Std. No. 595. Colorless Varnish per MIL-V-6894

Minimum letter size - 3/64 in. high.

Applicable order and serial number will be steel stamped by TMC

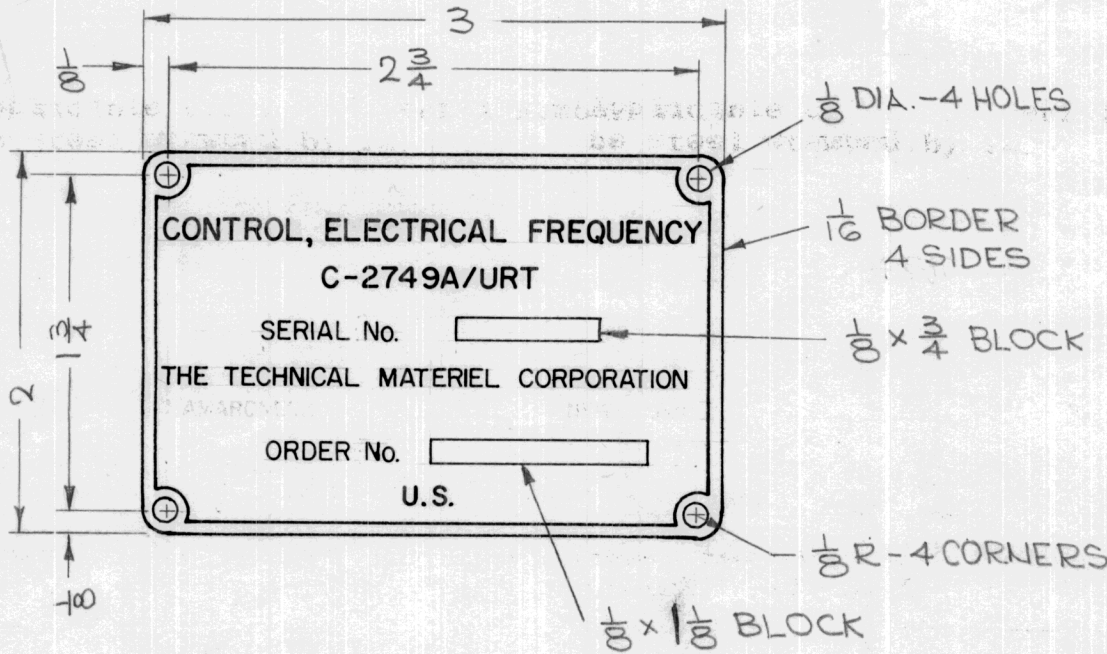


Nameplate to be in accordance with MIL-STD-130 and MIL-M-13231A. (Ref. Signal Corps)

SC 05147-PP-64

REQ. UNIT	ITEM	PART NO.	DESCRIPTION				SYMBOL
		0.032 STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
		Aluminum	NAMEPLATE, IDENTIFICATION				
			XFK-2				
A	MAMARONECK, N.Y. DELETED ON PICTORIAL	7-28-64	11955				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	DO NOT SCALE				
		5052-H-32					
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN		CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE	
		See Notes	ELEC. DES. APP.		MECH. DES. APP.	NP-614	A
		FINISH & SPEC. NO.					


REQ. PER UNIT	USED ON			NP-616 0
	MODEL	ASS'Y. NO.	DATE	
1	MSA-1	A-3398	11-2-63	

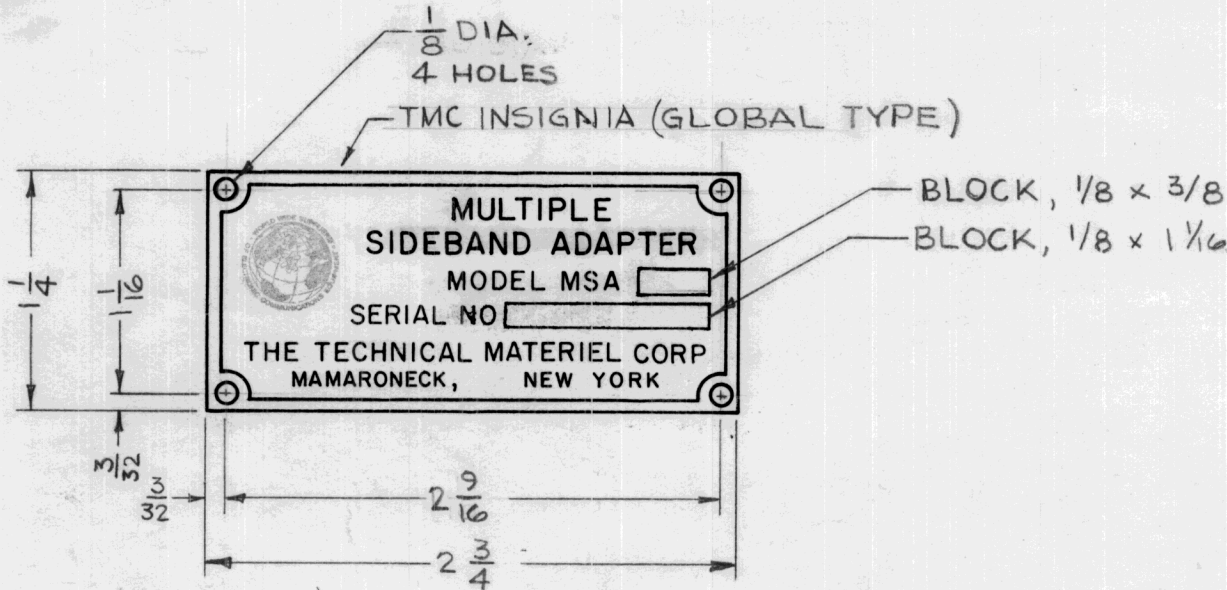

NOTE:
 BLACK MATTE BACKGROUND
 & CLEAR LACQUER.
 LETTERING TO BE SPARTAN
 MEDIUM, MINIMUM HEIGHT 3/64."

REQ. ITEM	PART NO.	AALTONEN	DESCRIPTION	SYMBOL						
	.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK								
	STOCK SIZE									
0	ALUMINUM	NAMEPLATE, IDENTIFICATION								
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	4-17-64	0	A.M.	@		5052-H32	T. RAMIREZ	10-18/63	RWC
	SCALE	1:1		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	SEE NOTE		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP-616 0	


REQ. PER UNIT	USED ON			NP-618 0
	MODEL	ASS'Y. NO.	DATE	
4	MAF		2-27-64	

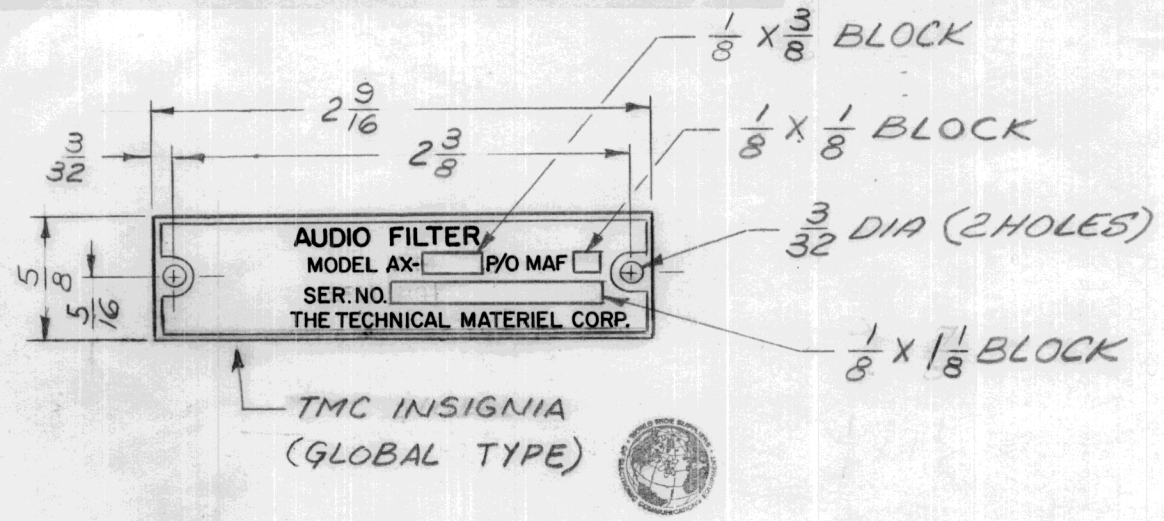

NOTE :
 1- BLACK MATTE BACKGROUND & CLEAR LACQUER
 2- LETTERING TO BE SPARTAN MEDIUM, MIN. HEIGHT 3/64

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		AALTONEN	
		.032 THICK	
		STOCK SIZE	
0	ORIGINAL RELEASE FOR PRODUCTION	4/24/64	0 A.M. @
XI	REDRAWN w/CHANGES	2/27/64	1 [signature]
		ALUMINUM	
		NAMEPLATE, IDENTIFICATION	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	5052-H32
		1 = 1	
			TYPE & TEMPER HEAT TREAT. SPEC. DRAWN CHECKED FINAL APPROVAL
			SEE NOTE 1
			FINISH & SPEC. NO. ELEC. DES. APP. MECH. DES. APP.
			NP-618 0

REQ. PER UNIT	USED ON			NP-619 A
	MODEL	ASS'Y. NO.	DATE	
2	SBCI-1A		12-13-63	

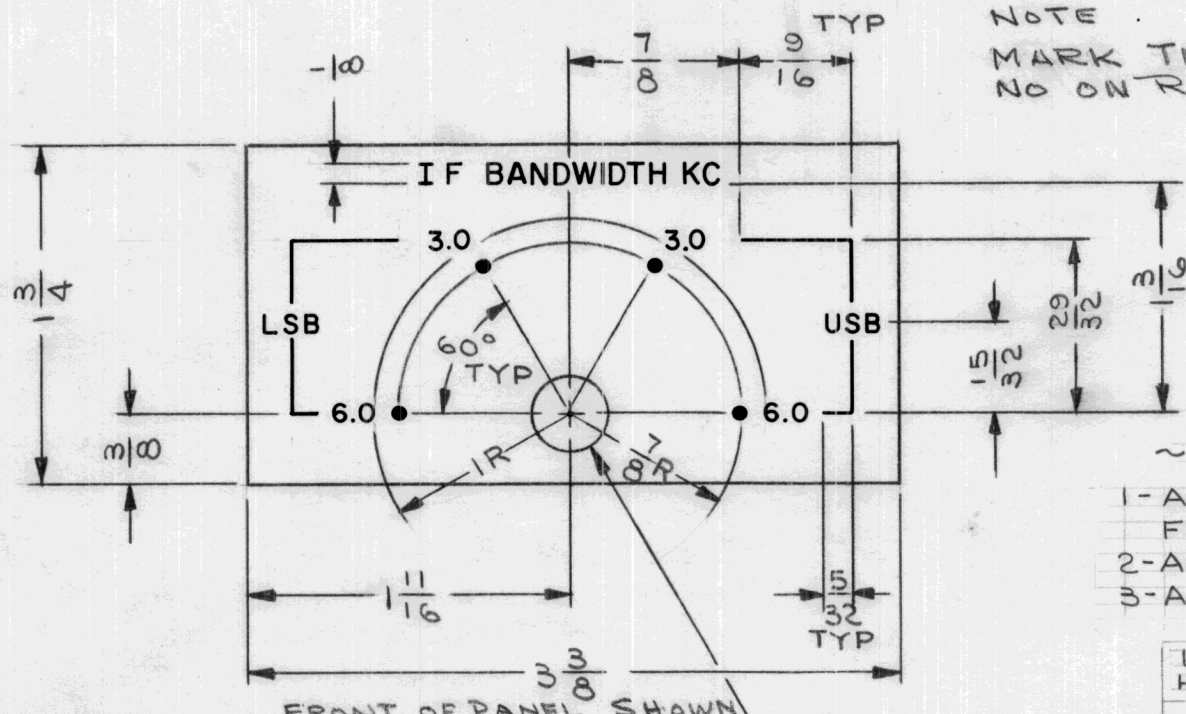

NOTE
MARK TMC PART
NO ON REAR OF PANEL

- ~ UNLESS OTHERWISE SPECIFIED ~
- 1- ALL ENGRAVING TO BE 3/32 WHITE FILLED GOTHIC.
 - 2- ALL DOTS TO BE WHT. FILLED.
 - 3- ALL LINES TO BE WHT. FILLED.

LETTER HEIGHT	DEPTH OF STROKE	WIDTH OF STROKE
3/32	.010	.015
1/8	.010	.020
DOTS	.010	1/16 DIA
LINES	.010	.015



MACHINING:
LATERAL BOW OF PANEL MUST BE KEPT TO .031 TOL.
PANEL MUST BE FREE OF ALL MACHINING MARKS.

- FINISH NOTES:
1. 5404 IRIDITE 14-2 AL-COAT
 2. 3114 ZINC CHROMATE PRIMER } FRONT AND
 3. 3115 SMOOTH GRAY ENAMEL } EDGES ONLY

						REQ. ITEM	PART NO.	R. HAY	DESCRIPTION	SYMBOL	
							.051 THK.		THE TECHNICAL MATERIEL CORP.		
							STOCK SIZE		MAMARONECK.		
							ALUMINUM		NEW YORK		
A	PICT. 3.0 WAS 3.5	9/17/65	14841	D.V.	QC/8				PLATE, DESIGNATION		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1			5052-H32	I.L.	HAY 12/24/63	BP	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE C			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
TOLERANCES							SEE NOTE				
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP-619 A	

REQ. PER UNIT	USED ON			NP-621	Ø
	MODEL	ASS'Y. NO.	DATE		
1	LFS-1		10-7-63		

TMC
GLOBAL
INSIGNIA.

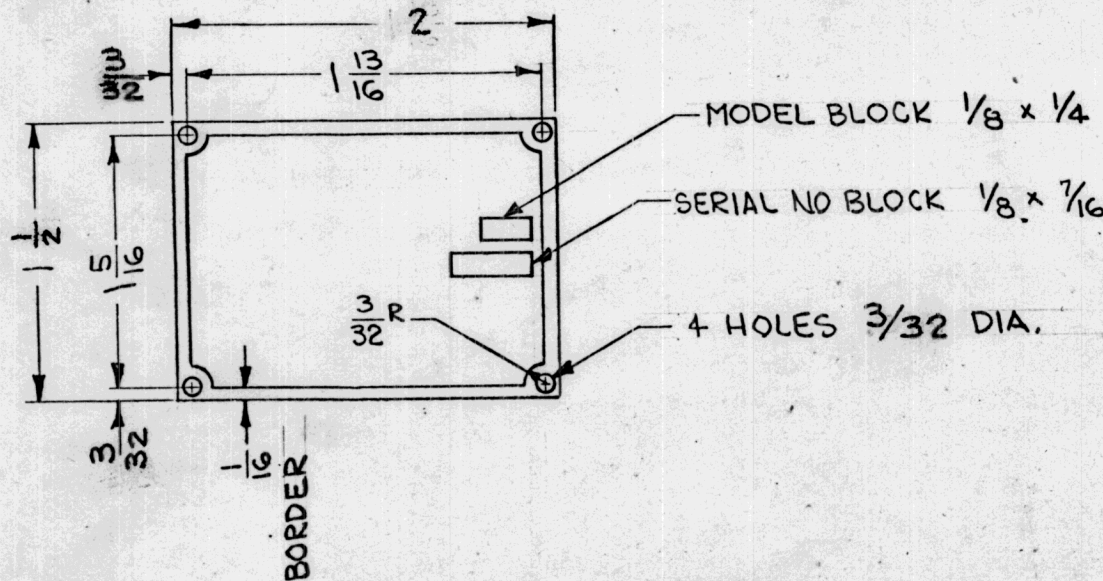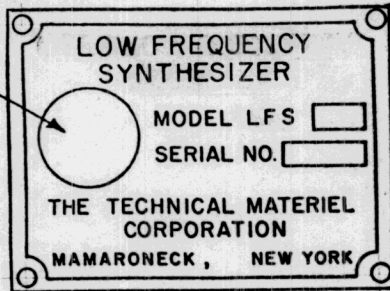

NOTES:

FINISH: REVERSE ETCH, ANODIZED ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STANDARD NUMBER 595. COLORLESS VARNISH PER MIL-V-6894.

TYPE FACE: SPARTAN MEDIUM. SIZE TO FIT SPACE AND LAYOUT. MINIMUM LETTER SIZE-- 3/64 HIGH.

APPLICABLE MODEL AND SERIAL NO. WILL BE STAMPED BY TMC.



NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH MIL-P-15024B, TYPE A, 17 JAN. 1957.

REQ.	ITEM	PART NO.	M. GELLMAN			DESCRIPTION	SYMBOL				
Ø	ORIGINAL RELEASE FOR PRODUCTION	7-10-64	Ø	Gelman		.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
X2	OVERALL DIM. CHGD	1/3/64	X2	JDC	2/33	STOCK SIZE	NAMEPLATE, IDENTIFICATION				
X1	3/32 HOLES WERE .0760. TYPE & TEMPER WAS 250	1/9/64	X1	GDL	1/20	ALUMINUM					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1					5052-H32			
TOLERANCES		FRACTIONS	CODE		SEE NOTES		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
.X ± .05		± 1/64	A		FINISH & SPEC. NO.						
.XX ± .01		ANGLES			ELEC. DES. APP.						
.XXX ± .005		± 0° 30'			MECH. DES. APP.						

NP-621 Ø

REQ. PER UNIT	USED ON			NP 622	Ø
	MODEL	ASS'Y. NO.	DATE		
1	CSS-2		10-7-63		

TMC GLOBAL INSIGNIA.

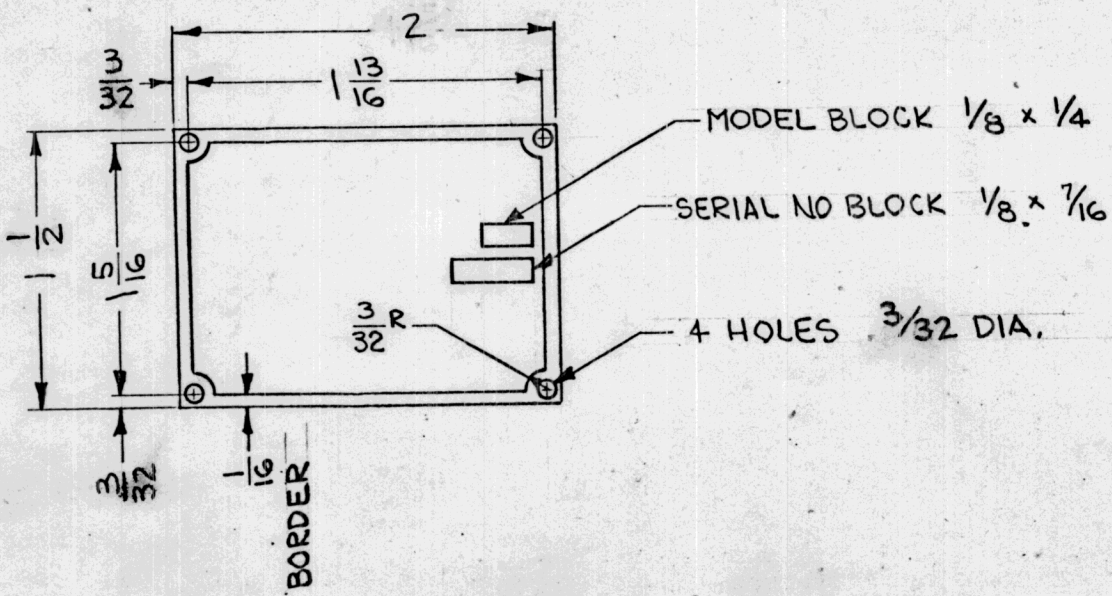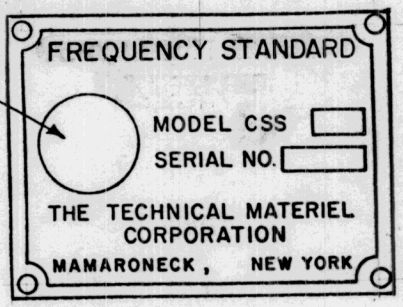

NOTES:

FINISH: REVERSE ETCH, ANODIZED ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STANDARD NUMBER 595. COLORLESS VARNISH PER MIL-V-6894.

TYPE FACE: SPARTAN MEDIUM. SIZE TO FIT SPACE AND LAYOUT. MINIMUM LETTER SIZE- 3/64 HIGH.


APPLICABLE MODEL AND SERIAL NO. WILL BE STAMPED BY TMC.

NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH MIL-P-15024B, TYPE A, 17 JAN. 1957.

REQ.	ITEM	PART NO.	M. GELLMAN			DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	6.25.64	Ø	AM		.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X2	OVERALL DIM. CHGD.	1/13/64	X2	JDR	2/23	STOCK SIZE		
X1	3/32 HOLES WERE .076D TYPE & TEMPER WAS 250	1/19/64	X1	GDL	JDR	ALUMINUM	NAMEPLATE, IDENTIFICATION	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1				5052-H32
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE	A	SEE NOTES
								FINISH & SPEC. NO.
								ELEC. DES. APP.
								MECH. DES. APP.
								NP 622
								Ø

REQ. PER UNIT	USED ON		NP-6290
	MODEL	DATE	
	MAF-1	2-27-64	

FINISH NOTE:
 1- BLACK MATTE BACKGROUND & CLEAR LACQUER
 2- LETTERING TO BE SPARTAN MEDIUM, MINIMUM HEIGHT 3/64"

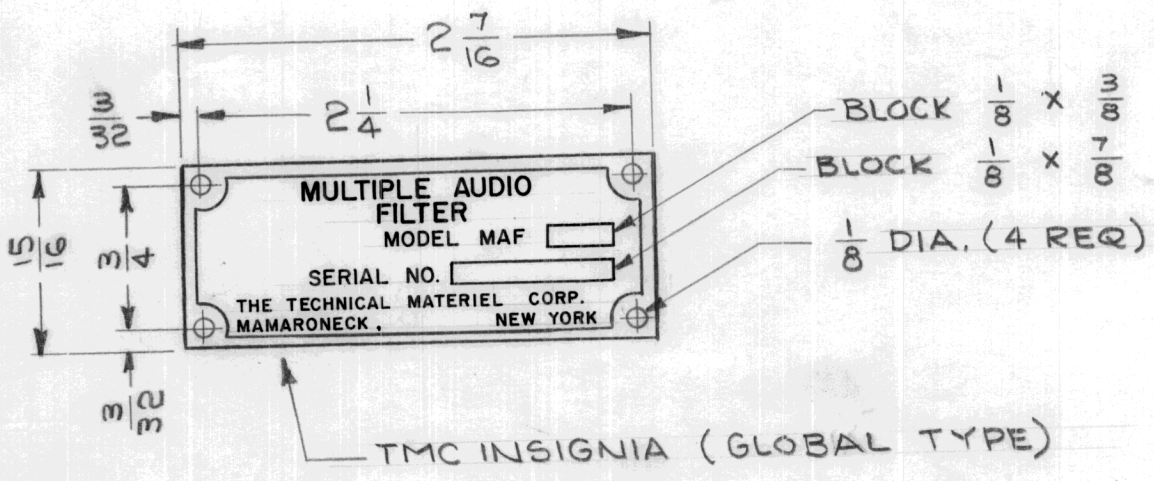


REQ.	ITEM	PART NO.	AALTONEN	DESCRIPTION	SYMBOL			
		.032 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
		STOCK SIZE		NAMEPLATE, IDENTIFICATION				
		ALUMINUM		(MAF-1)				
		MATERIAL						
0	ORIGINAL RELEASE FOR PRODUCTION	4/24/64	0	A.M. @				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1					
DECIMALS	TOLERANCES	FRACTIONS	CODE					
.X ± .05		± 1/64	A					
.XX ± .01		ANGLES						
.XXX ± .005		± 0° 30'						
		5052-H32		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		SEE NOTE 1						
		FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.			


NP-6290

REQ. PER UNIT	USED ON			NP-630 O
	MODEL	ASS'Y. NO.	DATE	
	MNF-1		2-27-64	

FINISH NOTE:
 1- BLACK MATTE BACKGROUND & CLEAR LACQUER.
 2- LETTERING TO BE SPARTAN MEDIUM, MINIMUM HEIGHT 3/64"

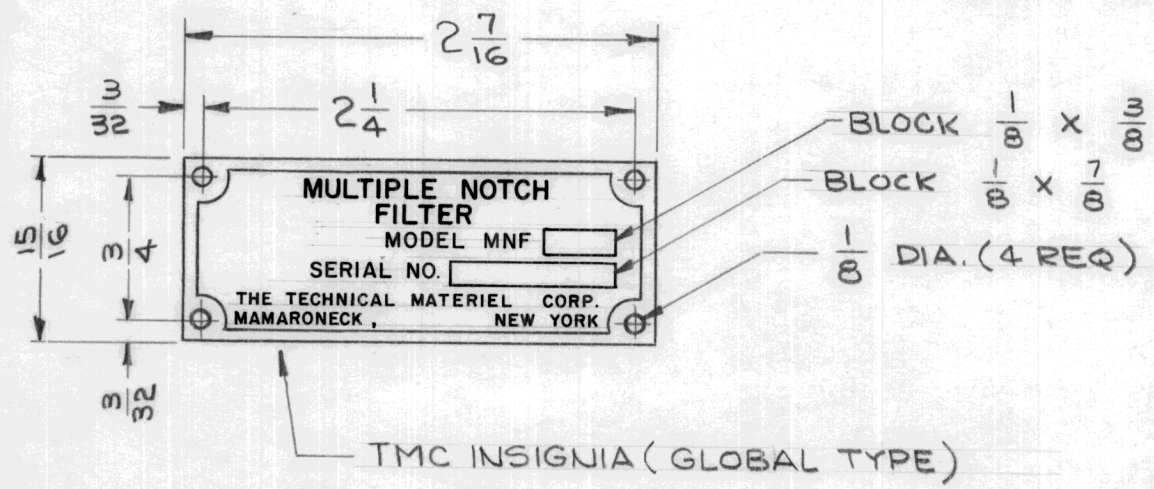


REQ. ITEM	PART NO.	AALTONEN	DESCRIPTION	SYMBOL								
	.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK										
○	ORIG. REL. FOR PROD.	3-12-64	#	@								
	ALUMINUM	NAMEPLATE, IDENTIFICATION (MNF-1)										
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	5052-H32		Q. Senar	@ 2-28-64	RJC
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS X ± .03 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		SEE NOTE 1			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP-630 O

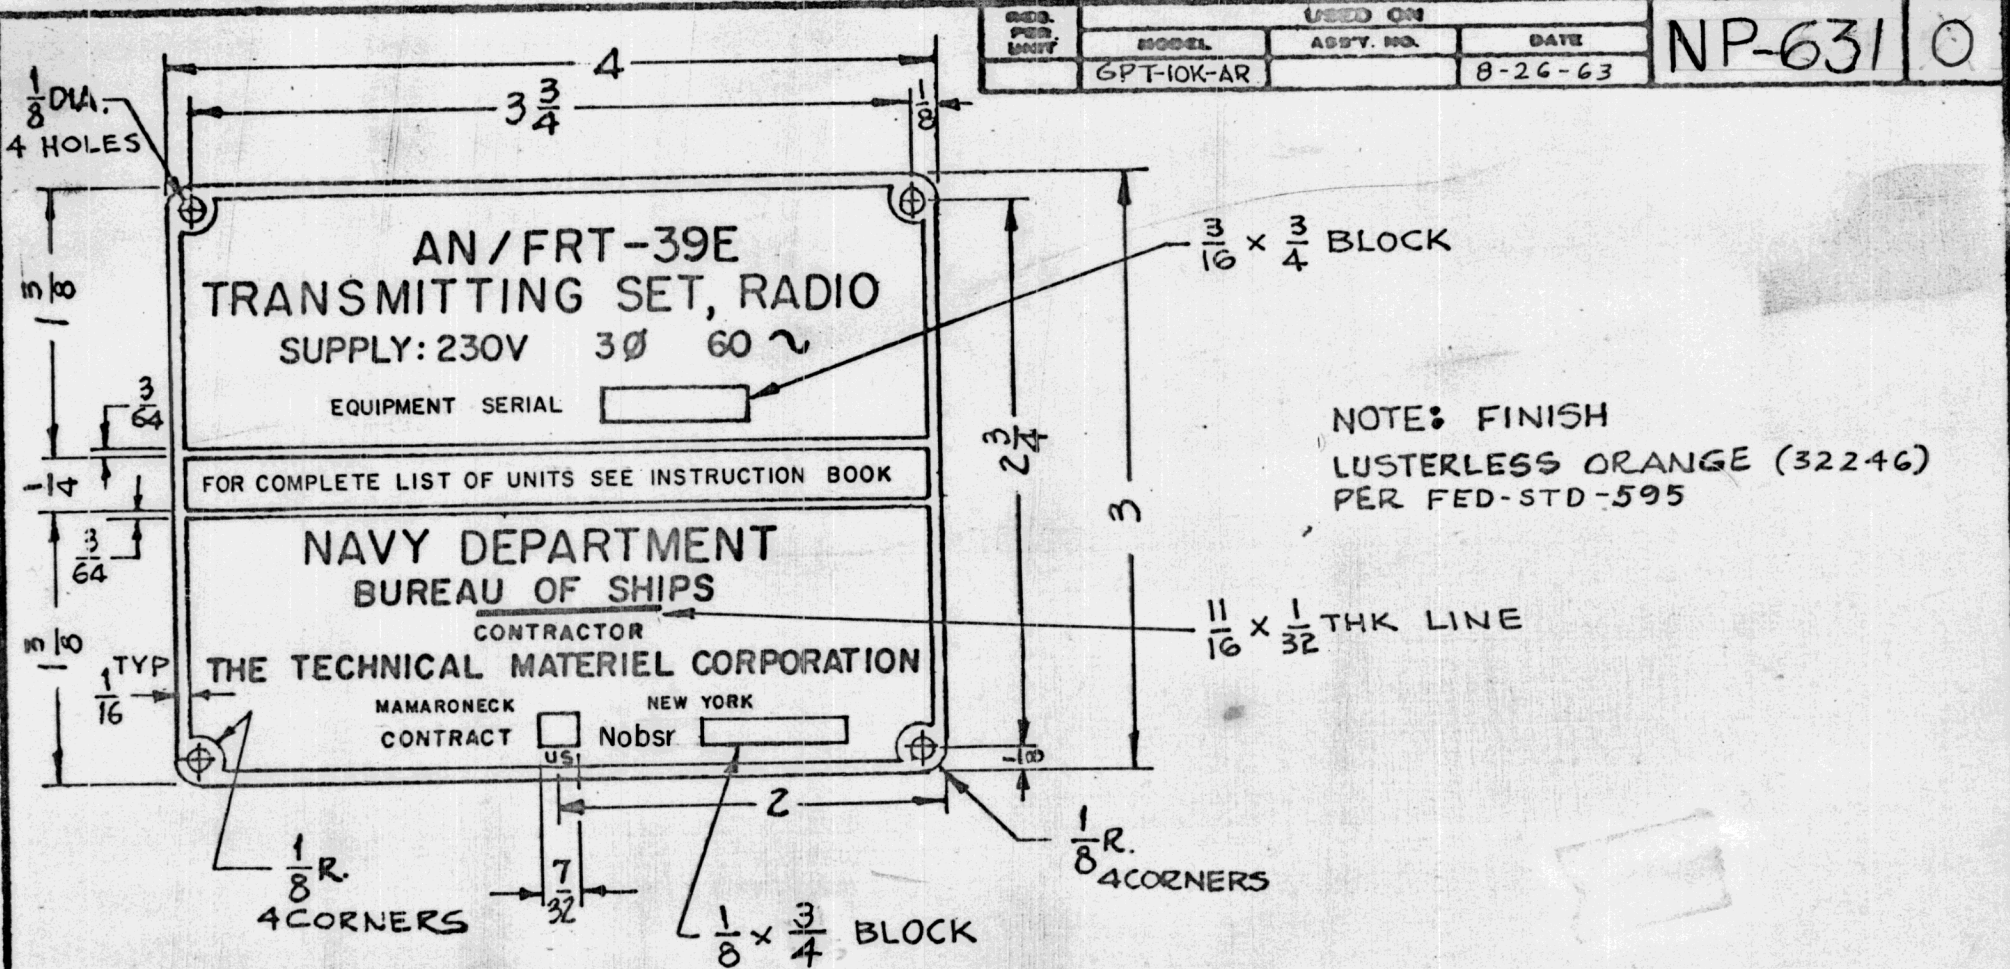

NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH MIL-P-15024B (SHIPS) TYPE A, AND AMENDS

BUSHIPS

REG.	ITEM	PART NO.	DESCRIPTION		SYMBOL					
		.032 THK.	THE TECHNICAL MATERIEL CORP.							
		STOCK SIZE	MAMARONECK, NEW YORK							
		ALUMINUM	NAMEPLATE, IDENTIFICATION							
		MATERIAL	GPT-10K-AR							
ISSUE	ITEM	CHANGED FROM	DATE	CH NO	DRAFTS	CHECKER	ENG APP			
TOLERANCES			SCALE			5052-H32		A.M.	@ 3-26-4	<i>RJC</i>
DEC DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION REMOVE ALL BURRS AND SHARP EDGES			TYPE & TEMPER HEAT TREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL
FRAC DIM. ±						SEE NOTE			<i>CDW</i>	NP-631
ANGULAR DIM. ±						FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	0

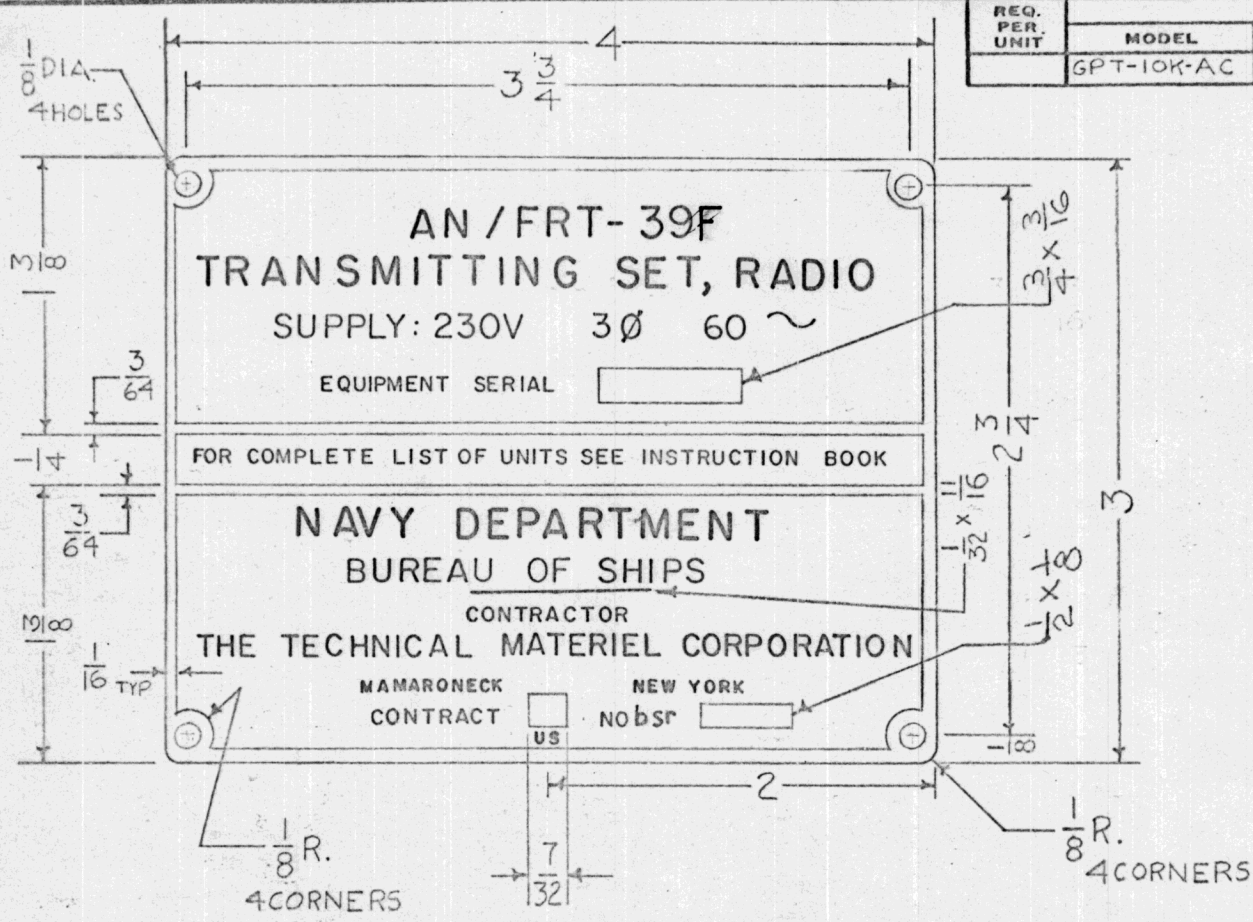

REQ. PER. UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
	GPT-10K-AC		9-15-61

NP-632 O

NOTE: FINISH
LUSTERLESS ORANGE (32246)
PER FEDERAL STD. 595

NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH
MIL-P-15024B(SHIPS) TYPE A, AND AMENDS.

BUSHIPS

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
		ALUMINUM	NAMEPLATE			
		MATERIAL	GPT-10K-AC			
0	ORIGINAL RELEASE FOR PRODUCTION	3-30-64	0	A.M.	@	
X	EXPERIMENTAL RELEASE	3-23-64	X	A.M.	@	
ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE: $\frac{1}{4}$				
DEC. DIM. \pm		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. \pm						
ANGULAR DIM. \pm						
		5052-H32			A.M.	@ 3-26-64
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		SEE NOTE				NP-632 O
		FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

MODEL
GPT-10K(R)


USED ON

ASS'Y. NO.

DATE

NP-633

A

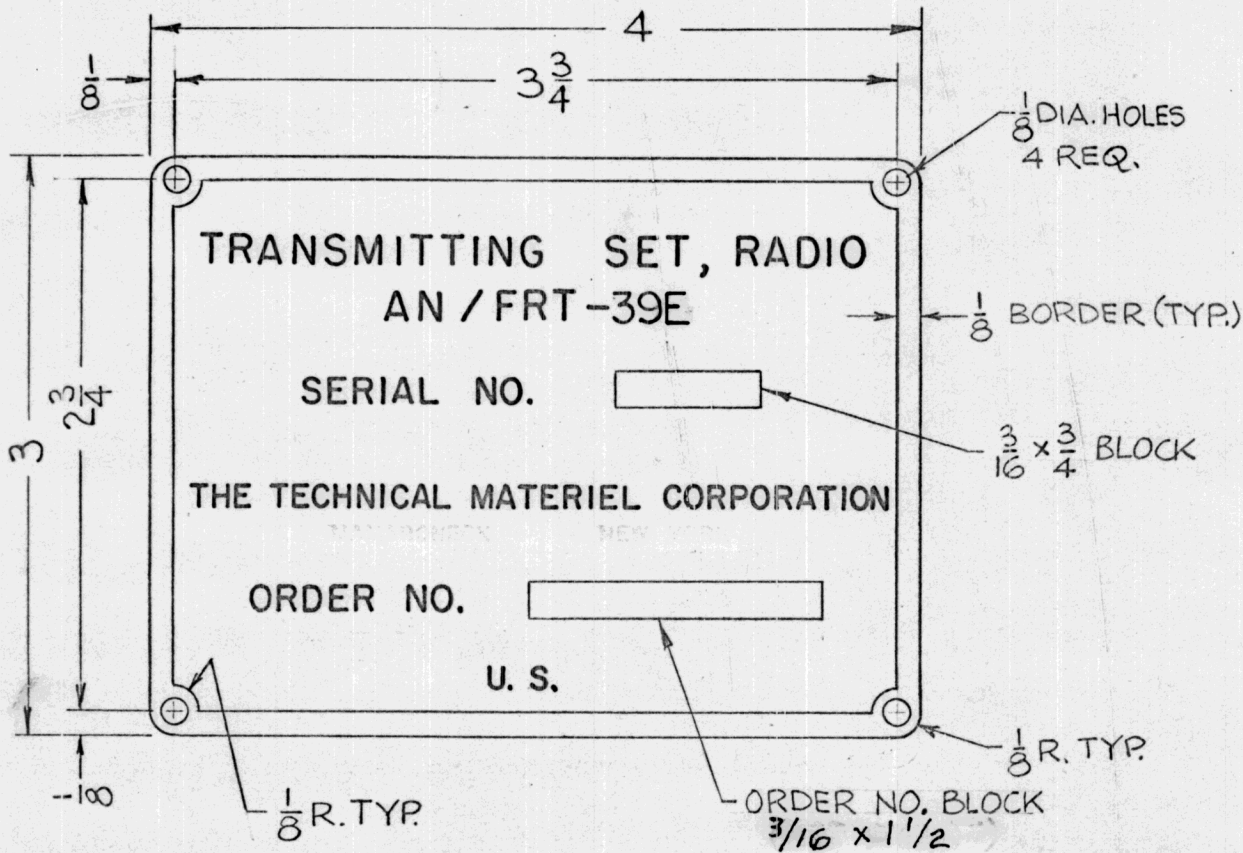

FINISH:
REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595
COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A (REF. SIGNAL CORPS)

REQ.	ITEM	PART NO.				DESCRIPTION	SYMBOL
A	MAMK, N.Y. DELETED ON PICTORIAL	728-64	11955				
O	ORIGINAL RELEASE FOR PRODUCTION	3-30-64	O	A.M.			
X	EXPERIMENTAL RELEASE	3-23-64	X	A.M.			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED:		SCALE:		5052-H32		A.M.	@3-26-64
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION, REMOVE ALL BURRS AND SHARP EDGES		SEE NOTE		DRAWN	CHECKED
TOLERANCES ON				FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°							
							NP-633
							A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

USED ON

MODEL

ASS'Y. NO.


DATE

CSS-1B

7-13-62

NP-634

B

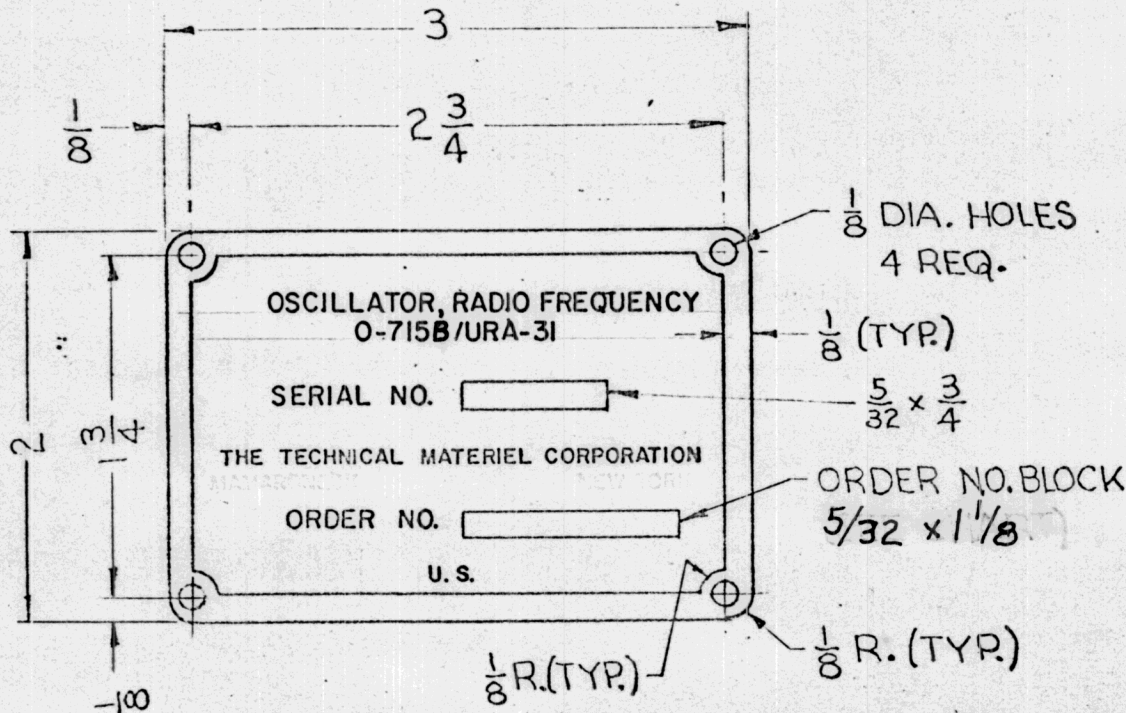

FINISH:
 REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595
 COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64" HIGH


APPLICABLE ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY T M C

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A (REF: SIGNAL CORPS)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
B	"NPO" DELETED	10.21.64	12680	DB	JCB						
A	MAMK, N.Y. DELETED ON PICTORIAL	7-25-64	11955		@			.032	THE TECHNICAL MATERIEL CORP.		
O	ORIGINAL RELEASE FOR PRODUCTION	3-30-64	O	A.M.	@			STOCK SIZE	MAMARONECK, NEW YORK		
X	EXPERIMENTAL RELEASE	3-26-64	X	A.M.	@			ALUMINUM	NAMEPLATE, IDENTIFICATION		
								MATERIAL	(MODEL CSS-1B)		
	UNLESS OTHERWISE SPECIFIED:	SCALE: DO NOT SCALE					5052-H32		A.M. @ 3-25-64		
	DIMENSIONS ARE IN INCHES	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	TOLERANCES ON						SEE NOTE				
	FRACTIONAL ± 1/64 DEC. ± .005 ANGLES ± 1/2°						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	NP-634 B

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	USED ON		NP-635	B
	MODEL	ASS'Y. NO.		
	CHG-2A		7-13-62	

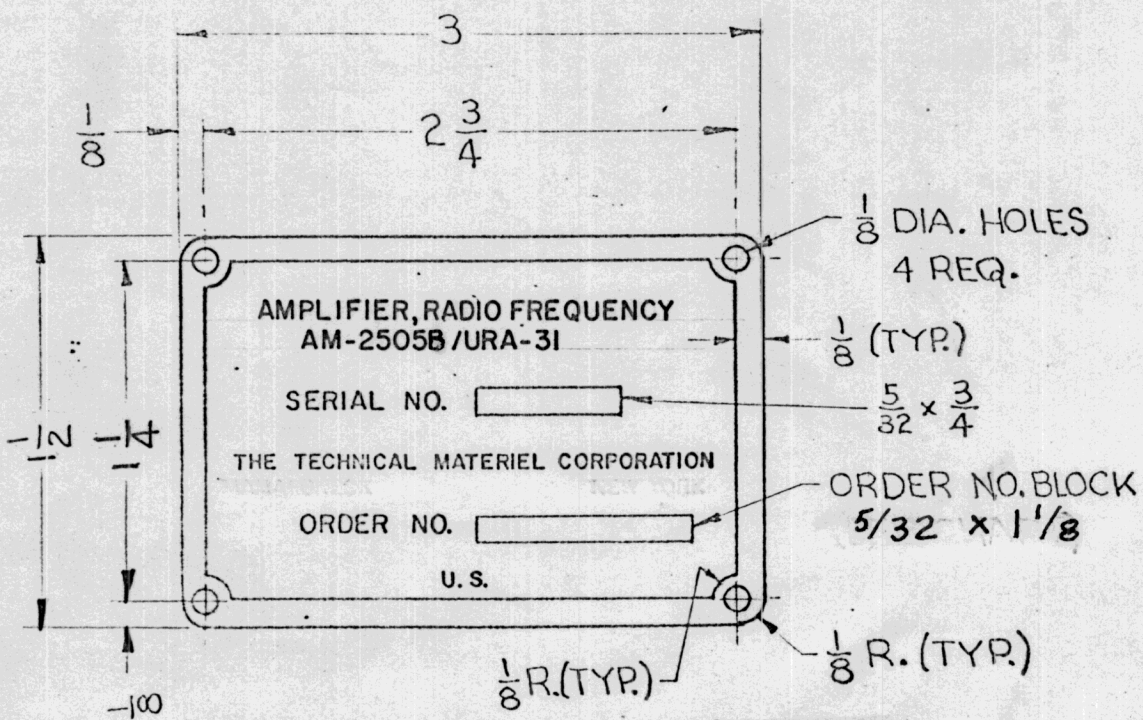

FINISH:
 REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595
 COLORLESS VARNISH PER MIL-V-6894


MINIMUM LETTER SIZE - 3/64" HIGH

APPLICABLE ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY T M C

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A (REF: SIGNAL CORPS)

B	"NPO" DELETED	10.21.64	12680	JSB	JCS		REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
A	MAMK, N.Y. DELETED ON PICTORIAL	7-28-64	11955		@			.032		THE TECHNICAL MATERIEL CORP.		
O	ORIGINAL RELEASE FOR PRODUCTION	3-30-64	O	A.M.	@			STOCK SIZE		MAMARONECK, NEW YORK		
X	EXPERIMENTAL RELEASE	3-26-64	X	A.M.	@			ALUMINUM		NAMEPLATE, IDENTIFICATION		
								MATERIAL		(MODEL CHG-2A)		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			5052-H32	A.M.	@-3-26-64	RJC
UNLESS OTHERWISE SPECIFIED:		SCALE: DO NOT SCALE										
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES										
TOLERANCES ON ANGLES ± 1/2°									SEE NOTE			
									FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP-635 B

REQ. PER UNIT	USED ON			NP-636 0
	MODEL	ASS'Y. NO.	DATE	
1	HFR-1	KIT-184	5-13-64	

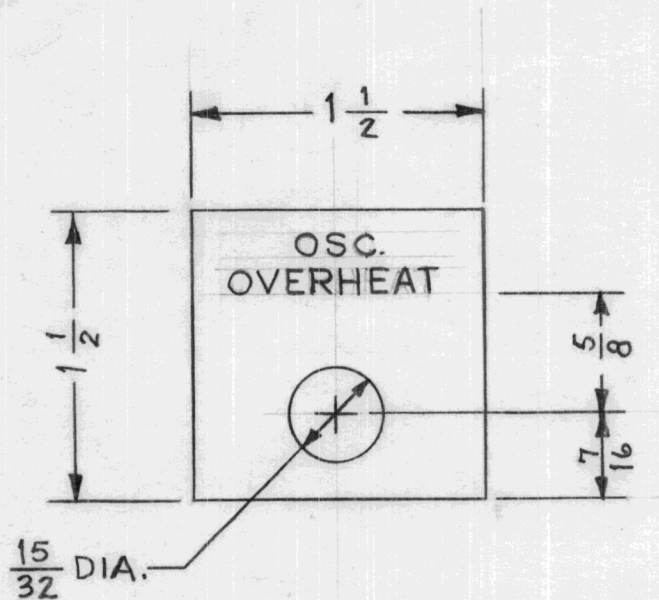

LETTERING 1/8" HIGH GOTHIC
ON TMC GRAY BACKGROUND

NOTE:

FINISH-

S404 - IRIDITE 14-2 AL-COAT

S114 - ZINC CHROMATE PRIMER

S115 - SMOOTH GRAY ENAMEL



REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	.040	THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE	MAMARONECK, NEW YORK	
0	ALUMINUM	NAMEPLATE, IDENTIFICATION	
	MATERIAL		
	5052 H32	M. TANTILLO 5-13-64	
	TYPE & TEMPER	CHECKED	FINAL APPROVAL
	HEAT TREAT. SPEC.		
	SEE NOTE		NP-636 0
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE 1:1					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE			

MACHINING

REQ. PER UNIT	USED ON			NP 638 0
	MODEL	ASS'Y. NO.	DATE	
1	SBE-6	MOD. KIT	5-20-64	

- 1-LATERAL BOW OF PANEL MUST BE KEPT TO .031 TOL.
- 2-PANEL MUST BE FREE OF ALL MACHINING MARKS.

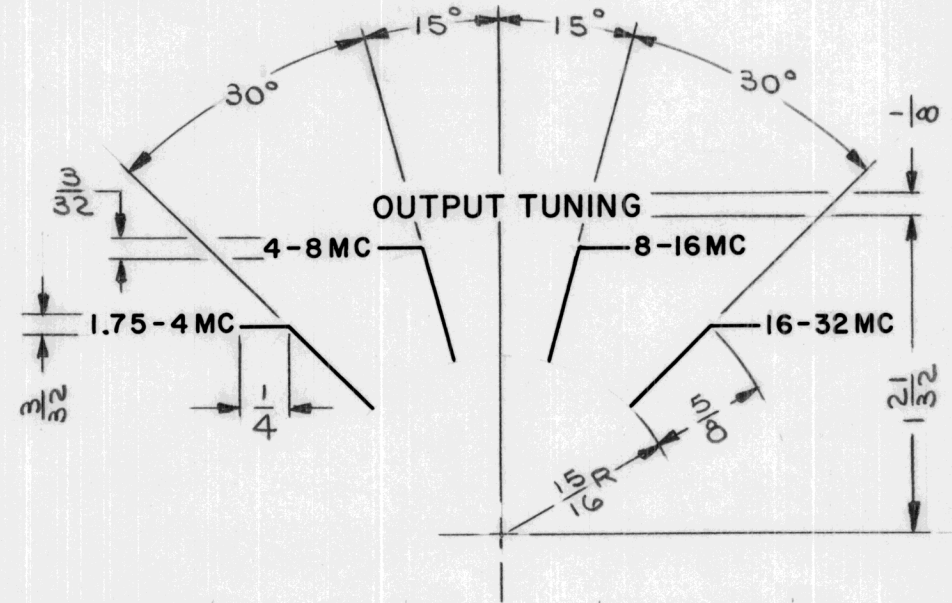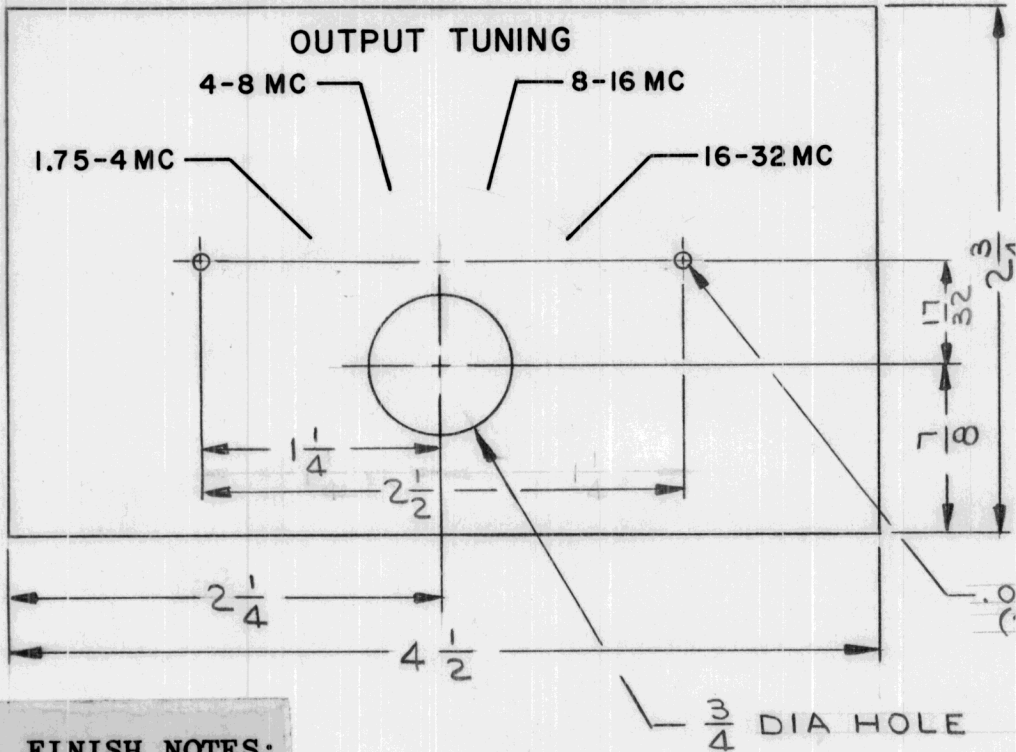

FINISH NOTES:

1. S404 - IRIDITE 14-2 AL-COAT.
2. S114 - ZINC CHROMATE PRIMER) FRONT AND
3. S115 - SMOOTH GRAY ENAMEL) EDGES ONLY
4. ALL LETTERING TO BE WHITE FILLED GOTHIC.
5. ALL LINEWORK TO BE WHITE FILLED.



LETTER HEIGHT	DEPTH OF STROKE	WIDTH OF STROKE
3/32	.010	.015
1/8	.010	.020
LINEWORK	.010	.015

REQ.	ITEM	PART NO.	M. GELLMAN DESCRIPTION			SYMBOL
		.051 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
		ALUMINUM	PLATE, ADAPTER			
		MATERIAL	OUTPUT TUNING			
0	ORIG. PROD. RELEASE	5-20-64	0	JL	@	RK
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			
DECIMALS	FRACTIONS	CODE				
.X ± .05	± 1/64	A				
.XX ± .01	ANGLES					
.XXX ± .005	± 0° 30'					
TOLERANCES						
SEE NOTES		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.
				J. LESHINSKI @ 5-22-64		NP 638 0
				DRAWN		FINAL APPROVAL
				CHECKED		
				ELEC. DES. APP.		

MACHINING

REQ. PER UNIT	USED ON			NP 639 0
	MODEL	ASS'Y. NO.	DATE	
1	RFD-2	MOD. KIT	5-20-64	

- 1-LATERAL BOW OF PANEL MUST BE KEPT TO .031 TOL.
- 2-PANEL MUST BE FREE OF ALL MACHINING MARKS.

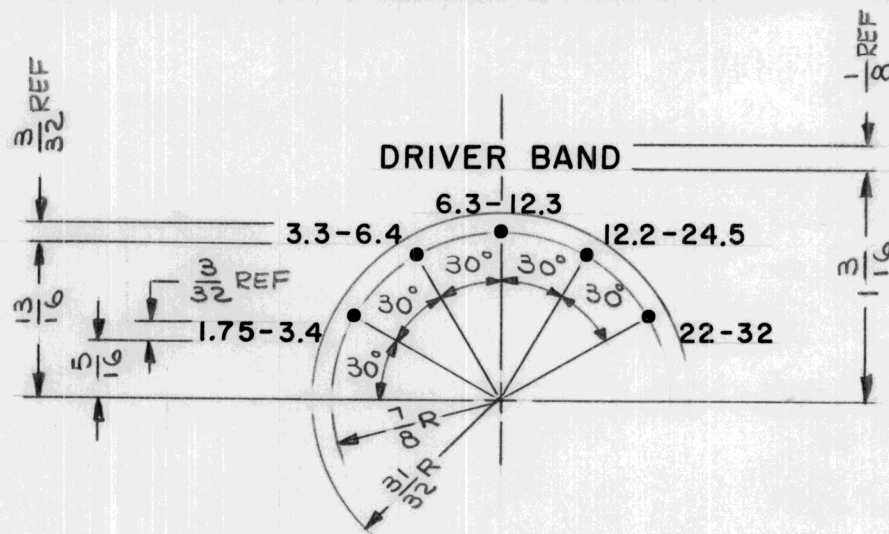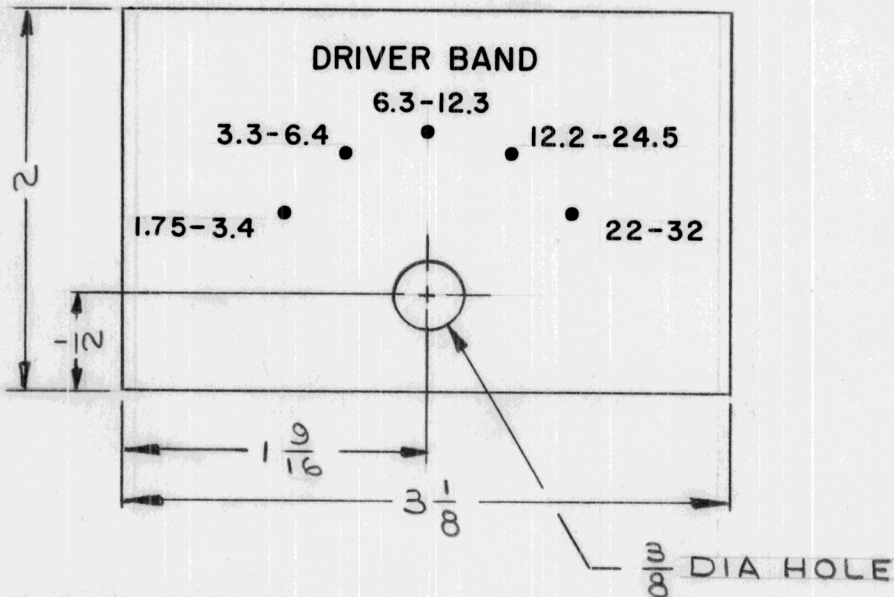

LETTER HEIGHT	DEPTH OF STROKE	WIDTH OF STROKE
3/32	.010	.015
1/8	.010	.020
DOTS	.010	1/16 DIA

FINISH NOTES:

1. S404 - IRIDITE 14-2 AL-COAT.
2. S114 - ZINC CHROMATE PRIMER) FRONT AND
3. S115 - SMOOTH GRAY ENAMEL) EDGES ONLY
4. ALL LETTERING TO BE WHITE FILLED GOTHIC.
5. ALL DOTS TO BE WHITE FILLED.



							REQ. ITEM	PART NO.	M. GELLMAN	DESCRIPTION	SYMBOL	
							.051 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
							STOCK SIZE		PLATE, ADAPTER			
0	ORIG. PROD. RELEASE	5-20-64	JL	@	h		ALUMINUM		DRIVER BAND SWITCH			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					5052-H32	J. LESHINSKI	@ 5-22-64	Rde		
		1:1					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE					SEE NOTES				NP 639 0
		A					FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			

MACHINING

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	RFD-2	MOD. KIT	5-21-64

NP 640 0

- 1-LATERAL BOW OF PANEL MUST BE KEPT TO .031 TOL.
- 2-PANEL MUST BE FREE OF ALL MACHINING MARKS.

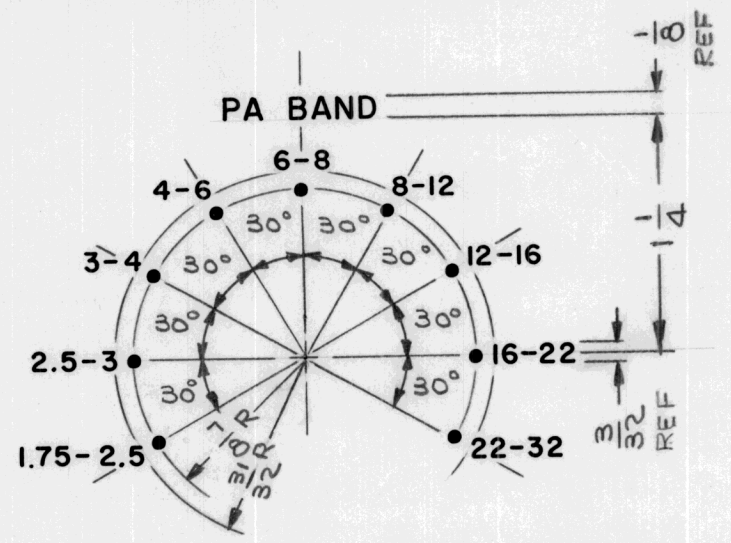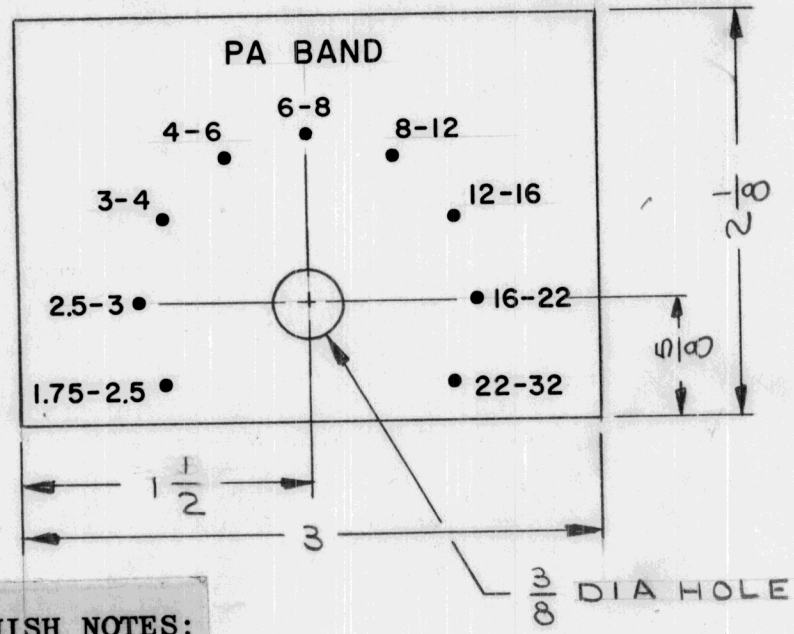


FINISH NOTES:

1. S404 - IRIDITE 14-2 AL-COAT.
2. S114 - ZINC CHROMATE PRIMER) FRONT AND
3. S115 - SMOOTH GRAY ENAMEL) EDGES ONLY
4. ALL LETTERING TO BE WHITE FILLED GOTHIC
5. ALL DOTS TO BE WHITE FILLED.

LETTER HEIGHT	DEPTH OF STROKE	WIDTH OF STROKE
3/32	.010	.015
1/8	.010	.020
DOTS	.010	1/16 DIA

REQ. ITEM	PART NO.	M. GELLMAN DESCRIPTION	SYMBOL
	.051 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	ALUMINUM	PLATE, ADAPTER	
	MATERIAL	P.A. BAND SWITCH	
ORIG. PROD. RELEASE	5-20-64	JL	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1
DECIMALS	TOLERANCES	FRACTIONS	CODE
.X ± .05 .XX ± .01 .XXX ± .005		± 1/64 ANGLES ± 0° 30'	A
	5052-H32	J. LESHINSKI @ 5-22-64	
	TYPE & TEMPER HEAT TREAT. SPEC.	DRAWN	CHECKED
	SEE NOTES		
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			NP 640 0

REQ. PER UNIT	USED ON			NP-641	Ø
	MODEL	ASS'Y. NO.	DATE		
1	GPT-750B2		5/21/64		

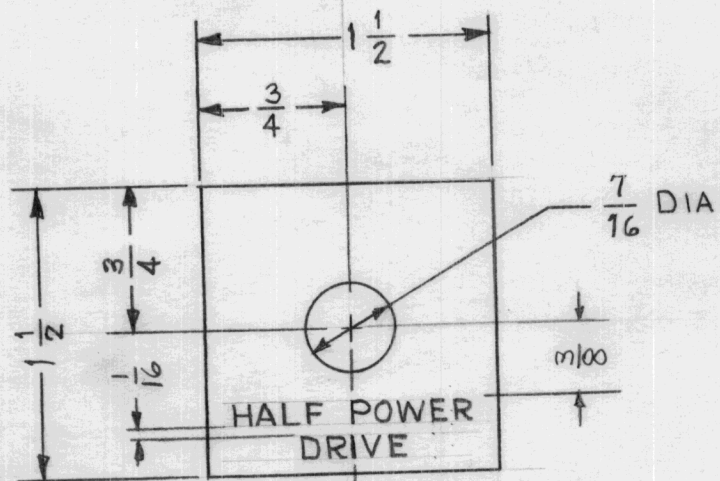


ALL ENGRAVING TO BE $\frac{1}{8}$ HIGH
 WHITE FILLED GOTHIC.
 DEPTH OF STROKE: .010
 WIDTH OF STROKE: .020

- FINISH NOTES:**
1. S404 - IRIDITE 14-2 AL-COAT.
 2. S114 - ZINC CHROMATE PRIMER) FRONT AND
 3. S115 - SMOOTH GRAY ENAMEL) EDGES ONLY

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		HAY	
	.051	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	STOCK SIZE		
Ø	ORIG. PROD. RELEASE	6-8-64	# A.M. @
X	EXPERIMENTAL RELEASE	5/21/64	
	ALUMINUM	NAMEPLATE, IDENTIFICATION	
	MATERIAL	SPECIAL MODIFICATION FOR NEW YORK TELEPHONE COMPANY	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	
		1-1	
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'
		CODE	A
	5052H32	#	@
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
	SEE NOTE		CHECKED
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			FINAL APPROVAL
			NP-641
			Ø

REQ. PER UNIT	USED ON			NP644	Ø
	MODEL	ASS'Y. NO.	DATE		
	10K (TECH NEW)				

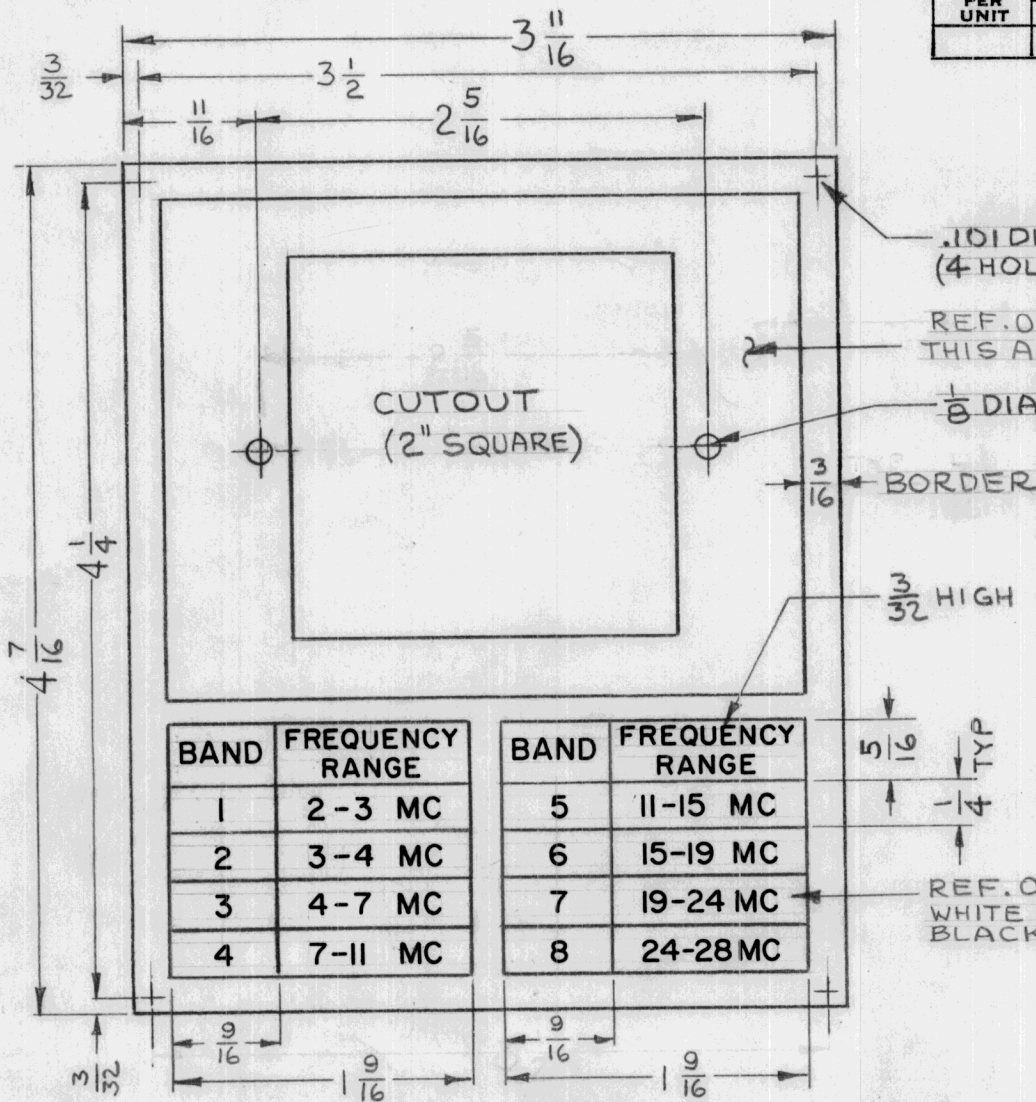

.101 DIA (4 HOLES)
 REF. ONLY (SEE NOTES)
 THIS AREA BLACK

1/8 DIA (2 HOLES)

BORDER

3/32 HIGH


5/16
 1/4 TYP

REF. ONLY (SEE NOTES)
 WHITE LETTERING
 BLACK BACKGROUND

- NOTE: (UNLESS OTHERWISE SPECIFIED)
- ALL LETTERING TO BE 1/8 HIGH WHITE GOTHIC, EXCEPT "FREQUENCY RANGE" WHICH IS TO BE 3/32 HIGH WHITE GOTHIC, ON BLACK BACKGROUND
 - BORDERS & LINE WORK TO BE WHITE (SIZES AS SHOWN)

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION			SYMBOL
		.032	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
		STOCK SIZE	PLATE, DESIGNATION			
		ALUMINUM	GPT-10K-TECHNIMATIC			
		MATERIAL				
		5052-H32	6.26.64	@	8/8/69	
		TYPE & TEMPER	DRAWN	CHECKED	FINAL APPROVAL	
		HEAT TREAT. SPEC.				
		SEE NOTES		aa	NP644	Ø
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		

REQ. PER UNIT	USED ON		DATE	NP645	A
	MODEL	ASS'Y. NO.			
1	BSP-1		7-2-64		

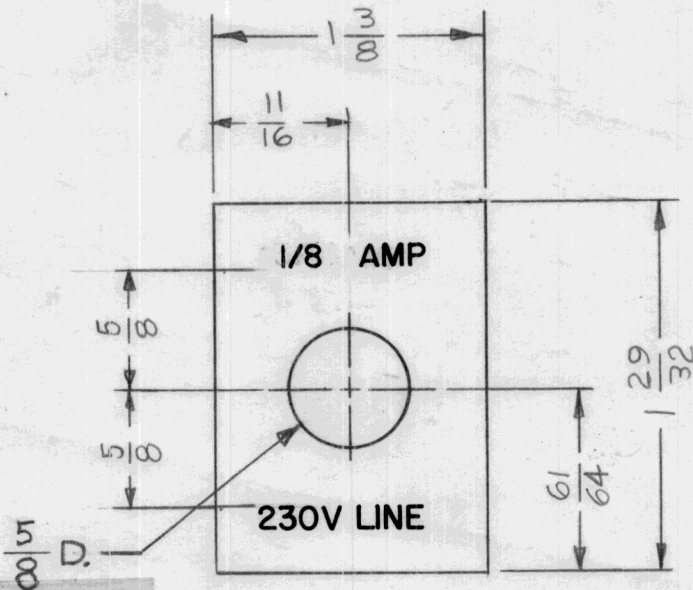


LETTER HEIGHT	DEPTH OF STROKE	WIDTH OF STROKE
1/8	.010	.020

FINISH NOTES:

1. S404 - IRIDITE 14-2 AL-COAT.
2. S114 - ZINC CHROMATE PRIMER) FRONT AND
3. S115 - SMOOTH GRAY ENAMEL) EDGES ONLY
4. ALL LETTERING TO BE WHITE FILLED GOTHIC.
5. ALL LINE WORK TO BE WHITE FILLED

						REQ. ITEM	PART NO.	R. HAY	DESCRIPTION	SYMBOL			
A	1/8 AMP WAS 3/16 AMP	4.14.65	13830	g.f.	<i>RB</i>		.051		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK PLATE, ADAPTOR FUSE				
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.3.64	Ø	g.f.	<i>[Signature]</i>		STOCK SIZE						
X	EXPER RELEASE	7-2-64	X	A.M.	<i>[Signature]</i>		ALUMINUM						
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1			5052-H32	<i>[Signature]</i>	<i>A. Marino</i>	<i>[Signature]</i>			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES			SEE NOTES		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
A							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	NP645 A		

REQ. PER UNIT	USED ON			NPG46	A
	MODEL	ASS'Y. NO.	DATE		
1	HPP-1		7-27-64		

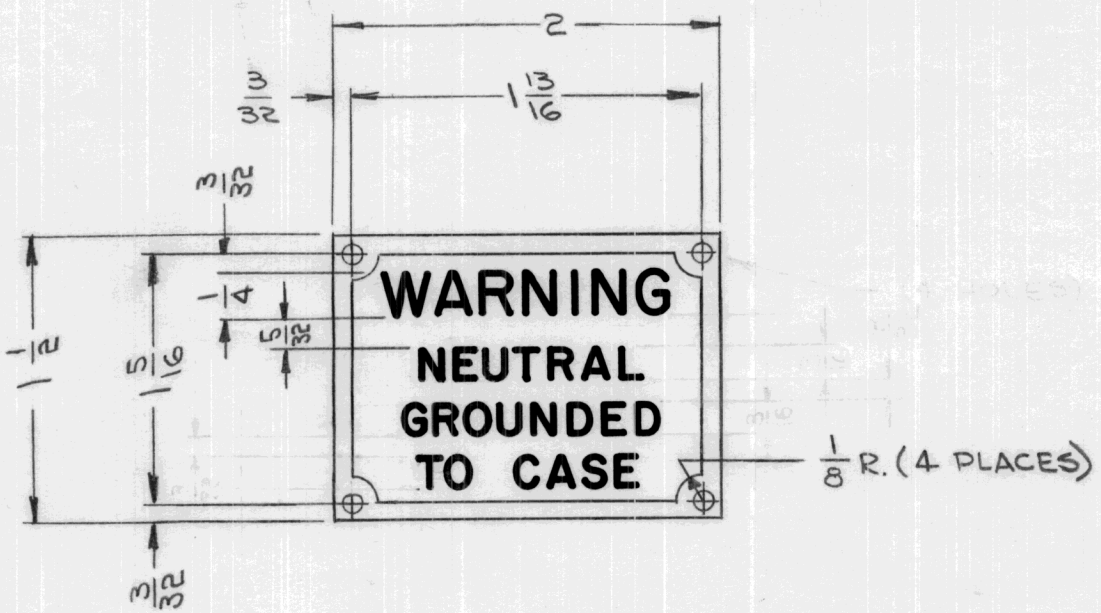

UNLESS OTHERWISE SPECIFIED
ALL LETTERING TO BE 3/16 HIGH,
WITH 3/32 SPACING.

NOTE:
TYPE FACE: SPARTAN
MEDIUM SIZE TO FIT
SPACE & LAYOUT.

FINISH: LUSTERLESS RED MATTE
BACKGROUND & CLEAR
LACQUER.

HOLES
.076 DIA - 4 REQ'D.

REQ. ITEM	PART NO.	STURMER	DESCRIPTION	SYMBOL									
A	STOCK WAS 3/32	10-2-64	12521	J.F. @ J.E.L.									
Ø	ORIGINAL RELEASE FOR PRODUCTION	8-3-64	Ø	J.E.L.									
X	EXPER. RELEASE	7-27-64	X	J.E.L.									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1				250			J.E.L.	@	J.E.L.	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A				SEE NOTES					NPG46	A
							FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.		


REQ. PER UNIT	USED ON			NPG48	Ø
	MODEL	ASS'Y. NO.	DATE		
1	SWCU-1		8-21-64		

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

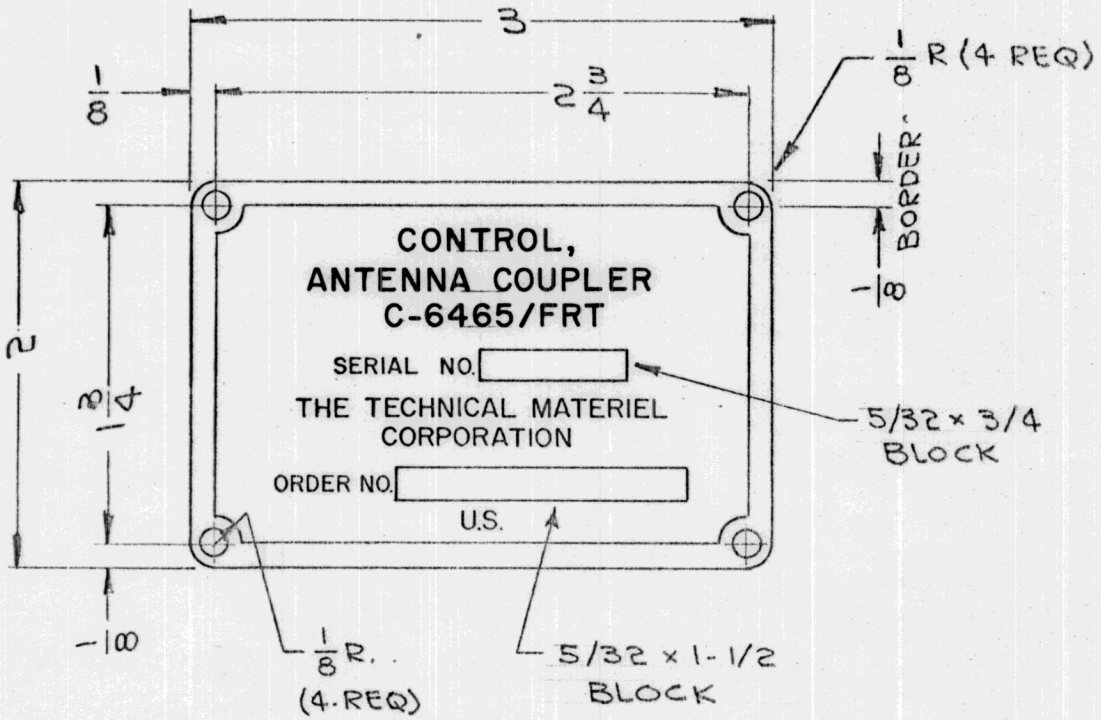

4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)


REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
Ø		.032 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
X		ALUMINUM	NAMEPLATE, IDENTIFICATION			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1			
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			
	TOLERANCES					
		5052-H32		By: [Signature]	[Signature]	[Signature]
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		SEE NOTE				
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		
						NPG48 Ø

REQ. PER UNIT	USED ON			NP649	Ø
	MODEL	ASS'Y. NO.	DATE		
1	APP-8		8-21-64		

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894 MIN. LETTER SIZE-3/64 IN. HIGH.


ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

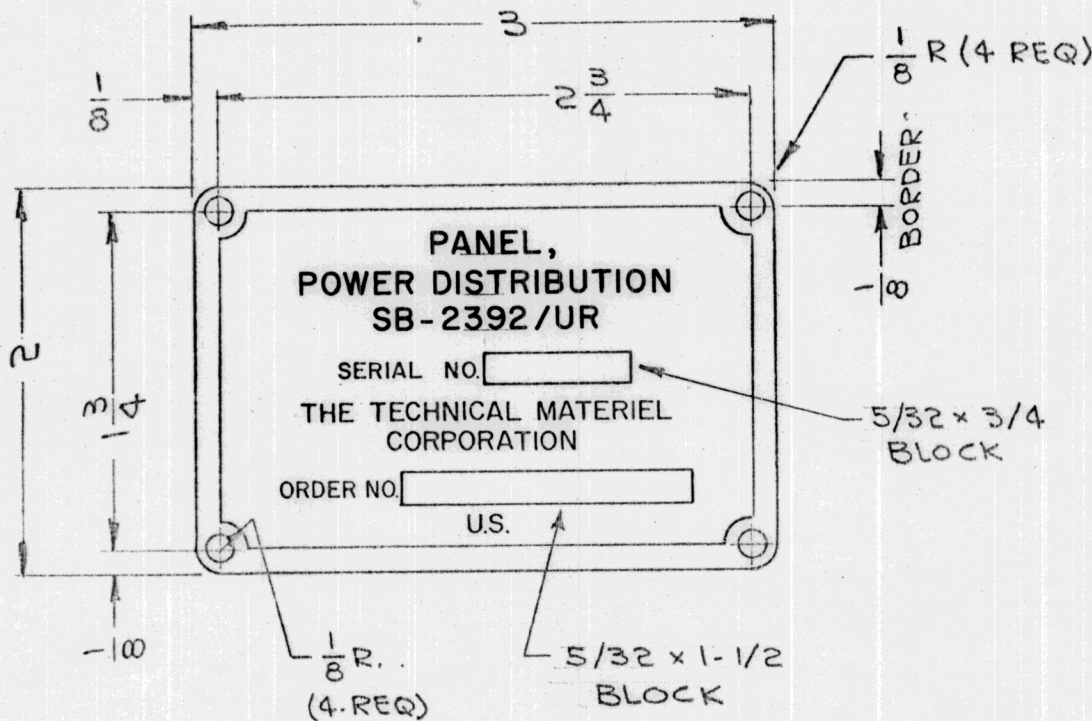

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
		.032 THK	THE TECHNICAL MATERIEL CORP.					
		STOCK SIZE	MAMARONECK, NEW YORK					
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	9L	NAMEPLATE, IDENTIFICATION			
X	EXPER. RELEASE	8-21-64	X	9L				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1				
DECIMALS	FRACTIONS	CODE						
.X ± .05	± 1/64	A						
.XX ± .01	ANGLES							
.XXX ± .005	± 0° 30'							
		5052-H32	-4	G. Lucas		OOD		
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN		CHECKED	FINAL APPROVAL	
		SEE NOTE						
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.				
							NP649 Ø	

REQ. PER UNIT	USED ON			NP650	Ø
	MODEL	ASS'Y. NO.	DATE		
1	DDR-5A		8-21-64		

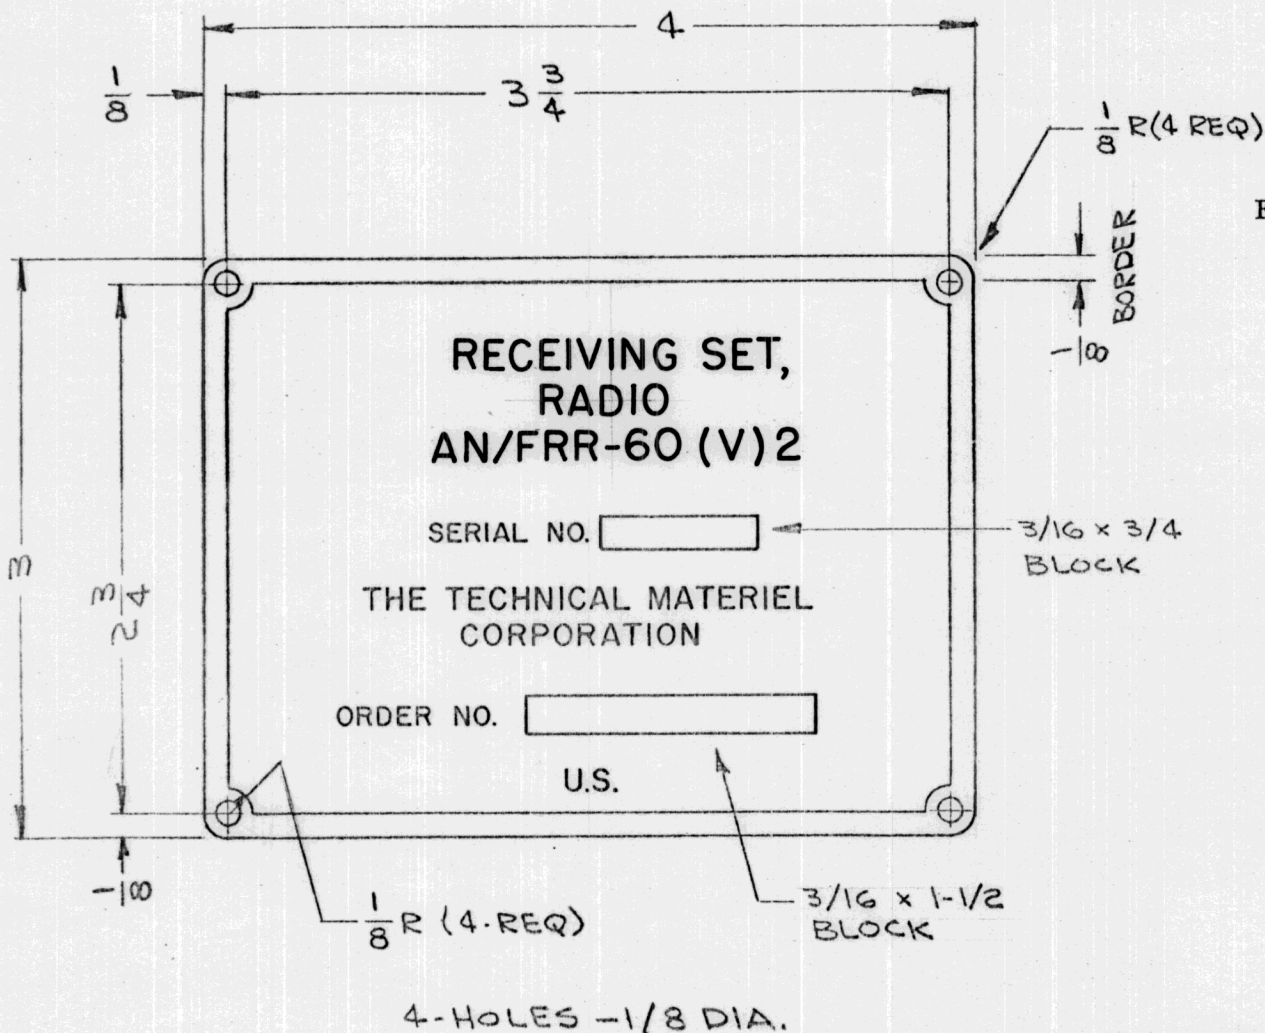

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894


MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
Ø		.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
X	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	GR		NAMEPLATE, IDENTIFICATION
X	EXPER. RELEASE	8-21-64	X	Sherr		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1		
DECIMALS	FRACTIONS	CODE	5052-H32			
.X ± .05	± 1/64	A	TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN
.XX ± .01	ANGLES		SEE NOTE			CHECKED
.XXX ± .005	± 0° 30'		FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
						NP650 Ø

REQ. PER UNIT	USED ON			NPG51	Ø
	MODEL	ASS'Y. NO.	DATE		
1	LFA-4		8-21-64		

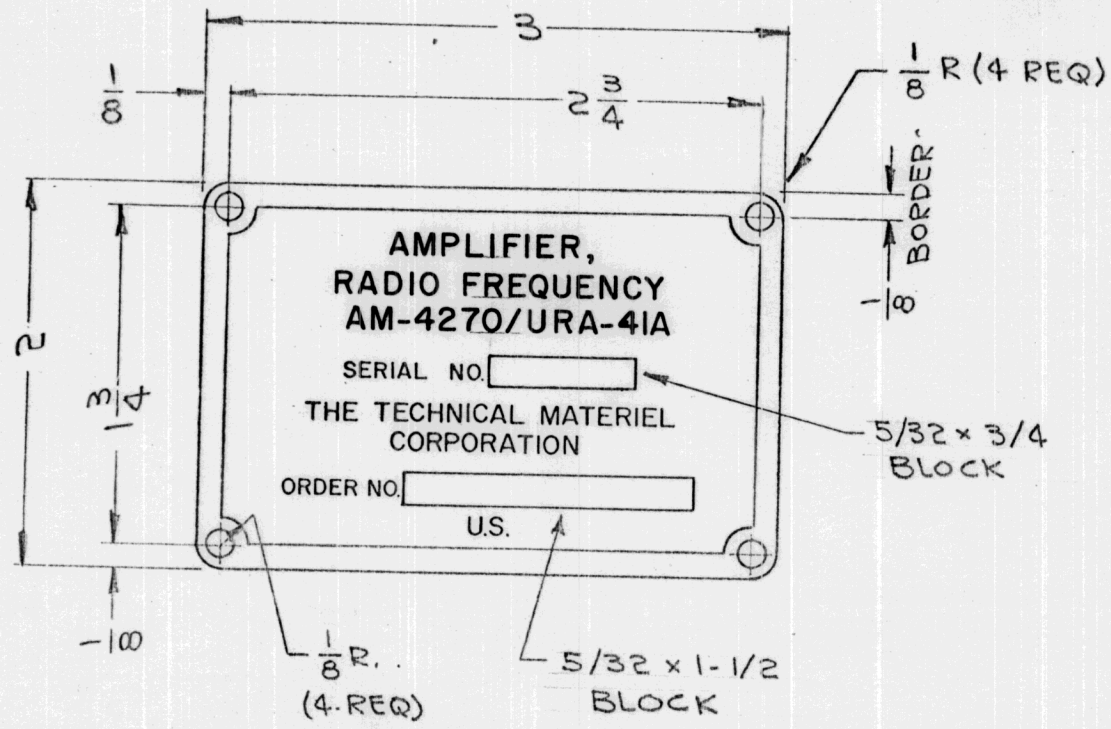

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894 MIN. LETTER SIZE-3/64 IN. HIGH.


ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	4P.			.032 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	NAMEPLATE, IDENTIFICATION				
X	EXPER. RELEASE	8-21-64	X	g. Green			ALUMINUM							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE	5052-H32	—4	g. Green	edd			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							TOLERANCES	1:1		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
FRACTIONS ± 1/64 ANGLES ± 0° 30'							CODE	SEE NOTE						
							FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.	NPG51	Ø	

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	GPT-40K-E4		8-21-64

NP652 Ø

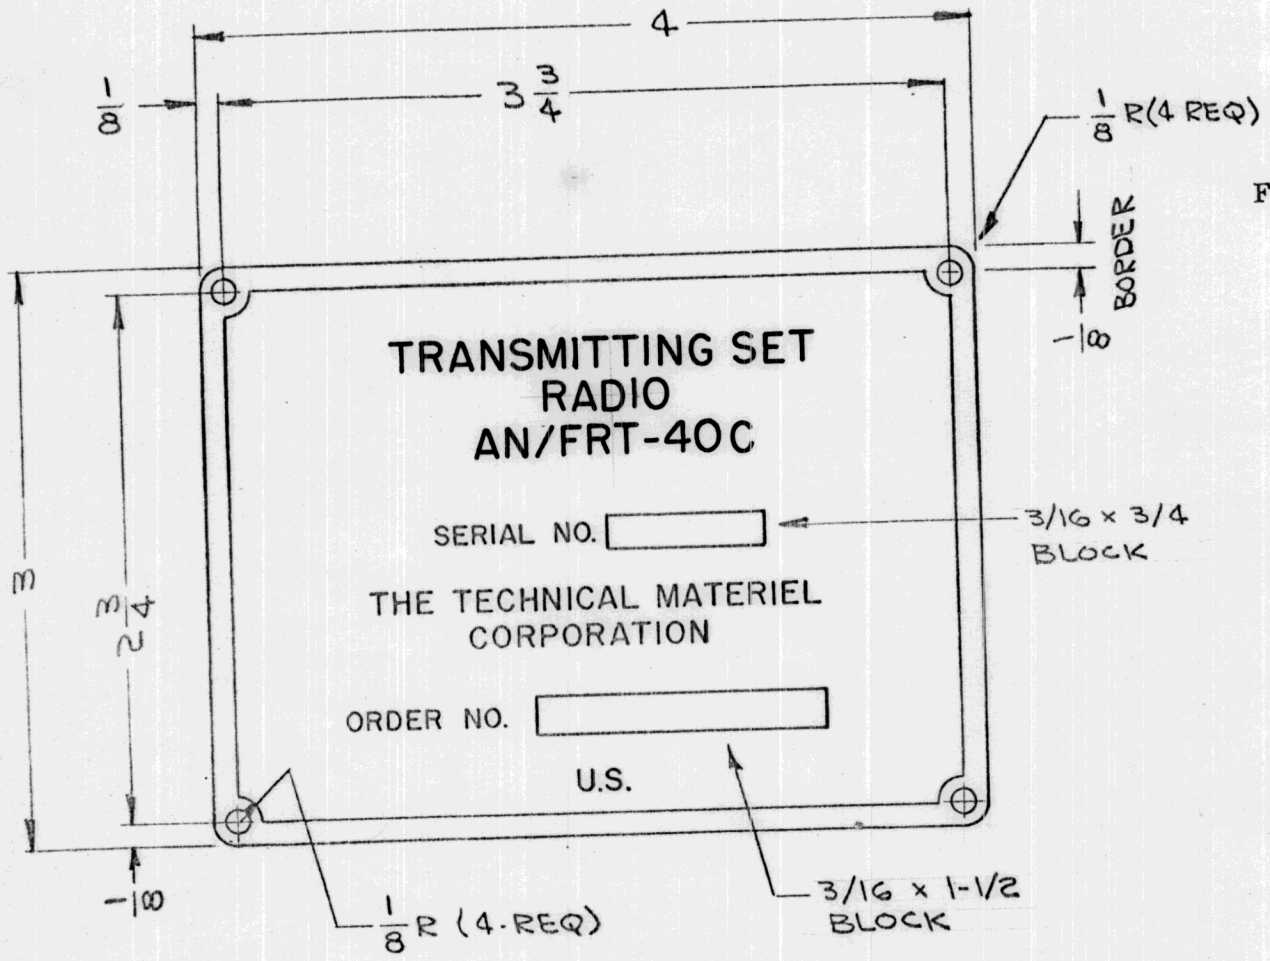

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH
ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS (REF: SIGNAL CORPS)

						REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
ORIGINAL RELEASE FOR PRODUCTION						9.15.64	Ø	9L	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
EXPER. RELEASE						8-21-64	X	Green	NAMEPLATE, IDENTIFICATION	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE		5052-H32		
						1:1		DRAWN		
						TYPE & TEMPER		CHECKED		
						HEAT TREAT. SPEC.		FINAL APPROVAL		
						SEE NOTE		NP652 Ø		
						FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.		

TOLERANCES
 DECIMALS .X ± .05
 .XX ± .01
 .XXX ± .005
 FRACTIONS ± 1/64
 ANGLES ± 0° 30'


CODE
A

TMC PART NO.	INSERT	MODEL
NP654-1	F-950/FRR	MAF-1
NP654-2	F-949/FRR	MNF-1

REQ. PER UNIT	USED ON		NP654 A
	MODEL	ASS'Y. NO.	
		DATE	
			8-31-64

FINISH: REVERSE ETCH, ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-NO-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE: 3/64 IN. HIGH.

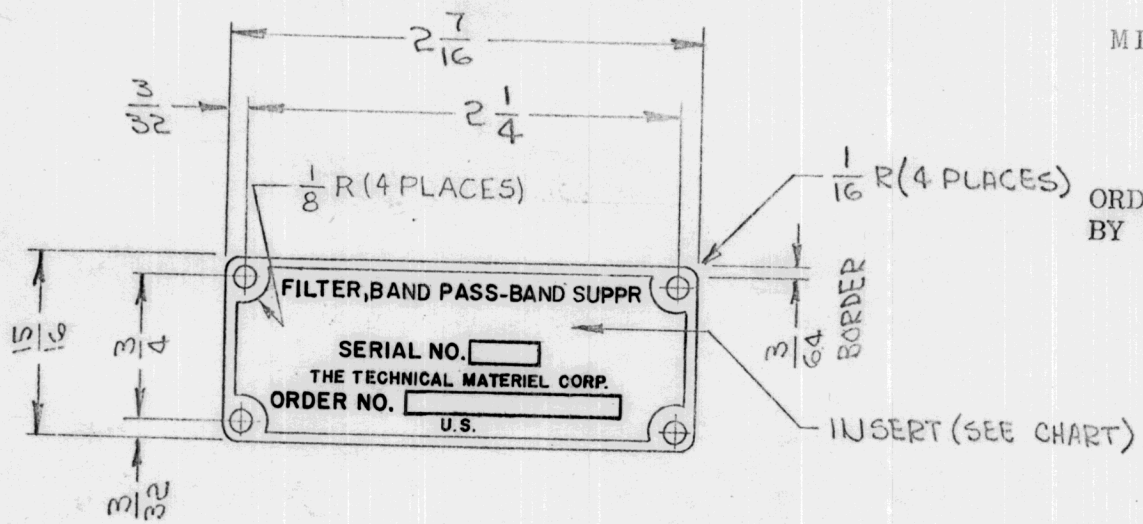

ORD. BLOCK - 1/8 x 1 1/4
 SER. BLOCK - 1/8 x 3/8
 4 HOLES - 1/8 DIA.

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC.


NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS).

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
A	"SERIAL NO." WAS "SERIAL" "ORDER NO." WAS "ORDER" ORIGINAL RELEASE FOR PRODUCTION	11.2.64	12824	Ans	@						
Ø	EXPER. RELEASE	9.15.64	Ø	92.							
X		8.31.64	X	Shiner							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1							
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE A		5052-H32		SEE NOTE	
						MATERIAL ALUMINUM		STOCK SIZE .032		DESCRIPTION THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
						TYPE & TEMPER 5052-H32		HEAT TREAT. SPEC.		NAMEPLATE, IDENTIFICATION	
						DRAWN G. Swan		CHECKED [Signature]		FINAL APPROVAL [Signature]	
						FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.	
										NP654 A	

REQ. PER UNIT	USED ON			NP655 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	AFC-3		8-20-64	

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-NO. 595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE: 3/64 IN. HIGH
ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC.

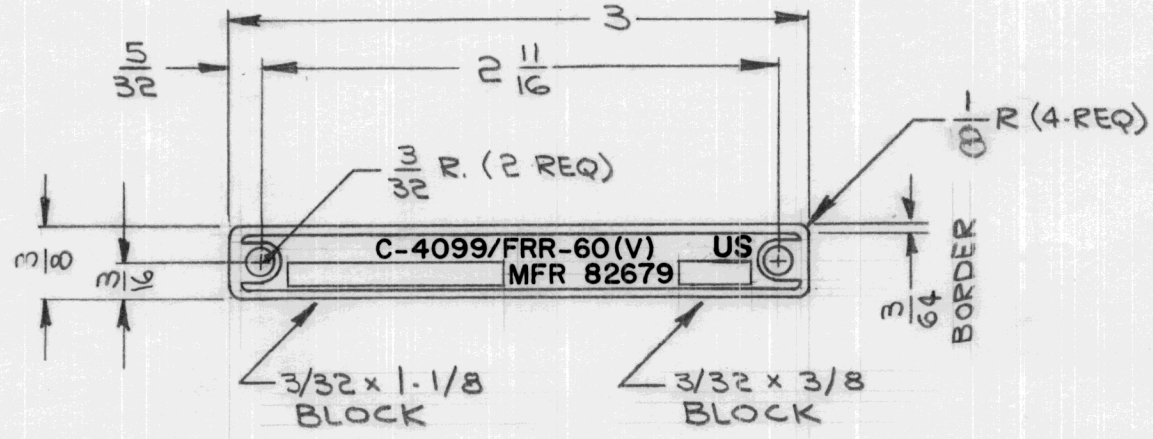


HOLE LEGEND
2 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
\emptyset		ORIGINAL RELEASE FOR PRODUCTION	
X ₁		US ADDED	
X		EXPER. RELEASE	
SYMBOL	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE 1:1	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A
	5052-H32	5052-H32	
	ALUMINUM	ALUMINUM	
	SEE NOTE	SEE NOTE	
	FINISH & SPEC. NO.	ELEC. DES. APP. MECH. DES. APP.	
			NP655 \emptyset

REQ. PER UNIT	USED ON			NPG56	Ø
	MODEL	ASS'Y. NO.	DATE		
1	BSP-6		8-21-64		

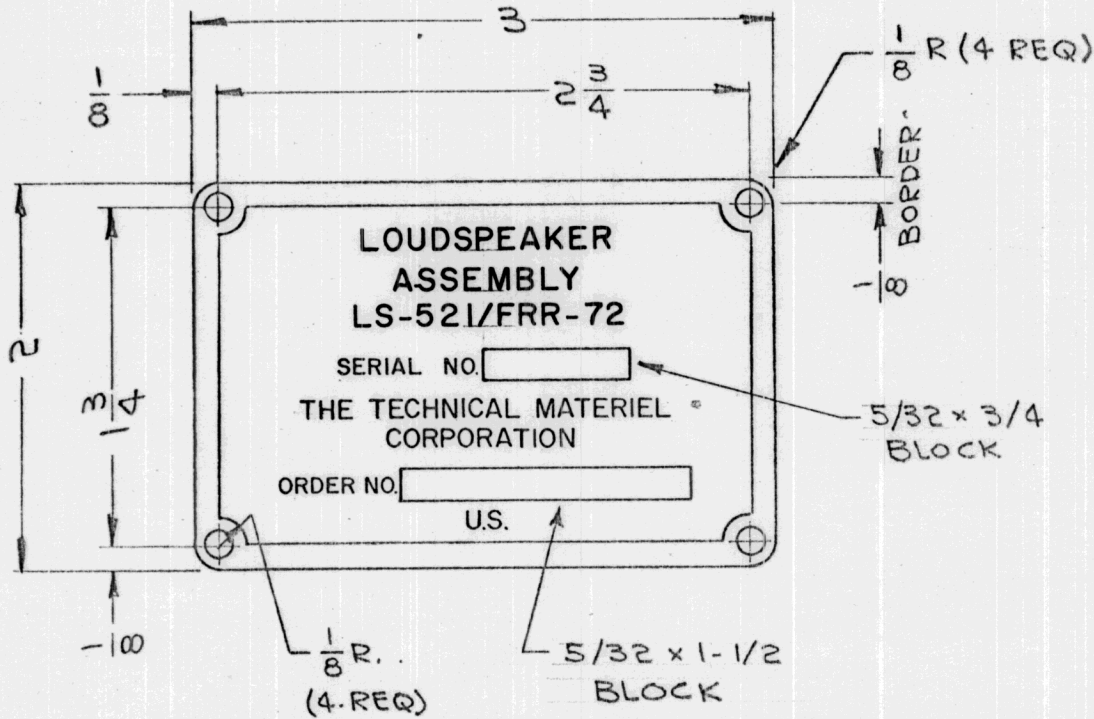

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.


4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
Ø		.032 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
X	ORIGINAL RELEASE FOR PRODUCTION	ALUMINUM	NAMEPLATE, IDENTIFICATION			
	EXPER. RELEASE					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1			
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		
	TOLERANCES		SEE NOTE			
			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
						NPG56 Ø

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	RAK-104		8-21-64

NP657 \emptyset

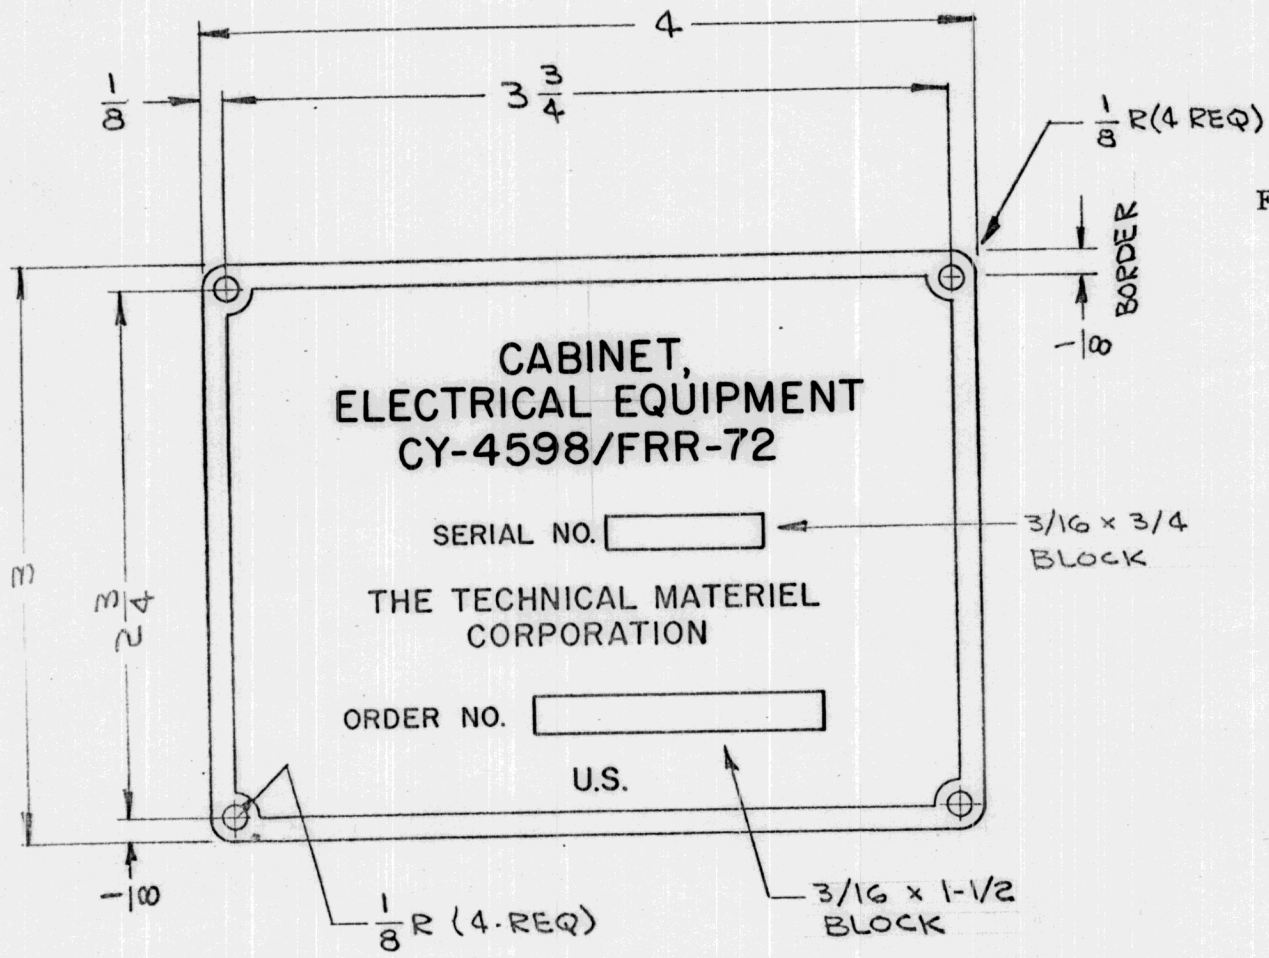

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH
ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC


NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS (REF: SIGNAL CORPS)

4-HOLES -1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	\emptyset	9.2	NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	<i>[Signature]</i>		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			
DECIMALS	FRACTIONS	CODE	5052-H32			
.X \pm .05	TOLERANCES \pm 1/64	A	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
.XX \pm .01	ANGLES \pm 0° 30'		SEE NOTE		FINAL APPROVAL	
.XXX \pm .005			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	

NP657 \emptyset

REQ. PER UNIT	USED ON			NPG58	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RAK-102		8-21-64		

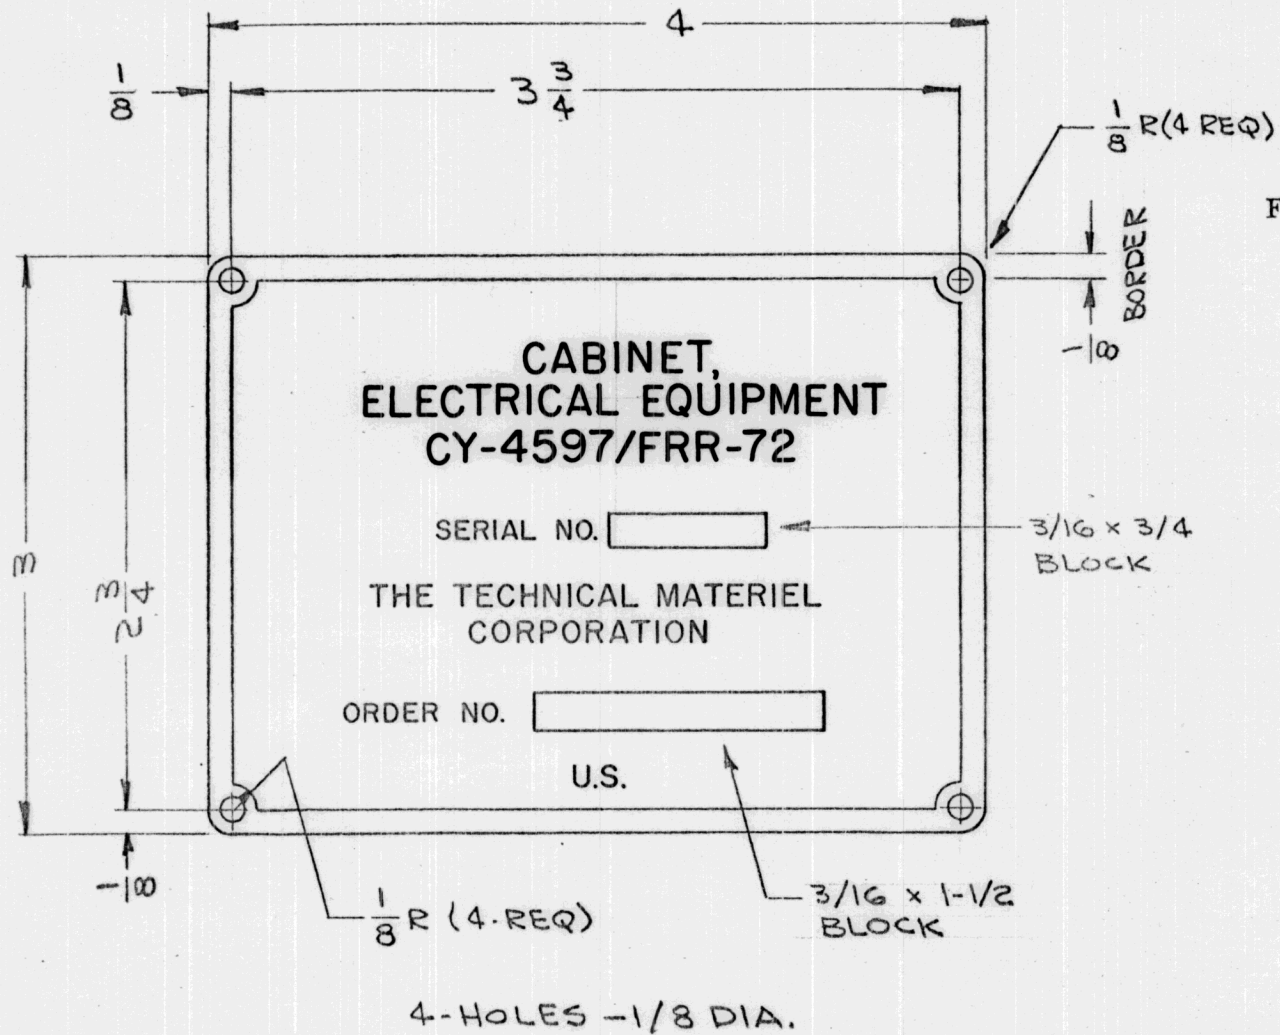


FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH
ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS (REF: SIGNAL CORPS)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	92			.032 THK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	EXPER. RELEASE	8-21-64	X	ghen			ALUMINUM		NAMEPLATE, IDENTIFICATION		
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1				5052-H32		g. lucas	edd	Final Approval
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	CODE A					SEE NOTE			NPG58
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

REQ. PER UNIT	USED ON		NP660	Ø
	MODEL	DATE		
1	DDR-5C / MSGA-1 / ARCA-1	8-21-64		

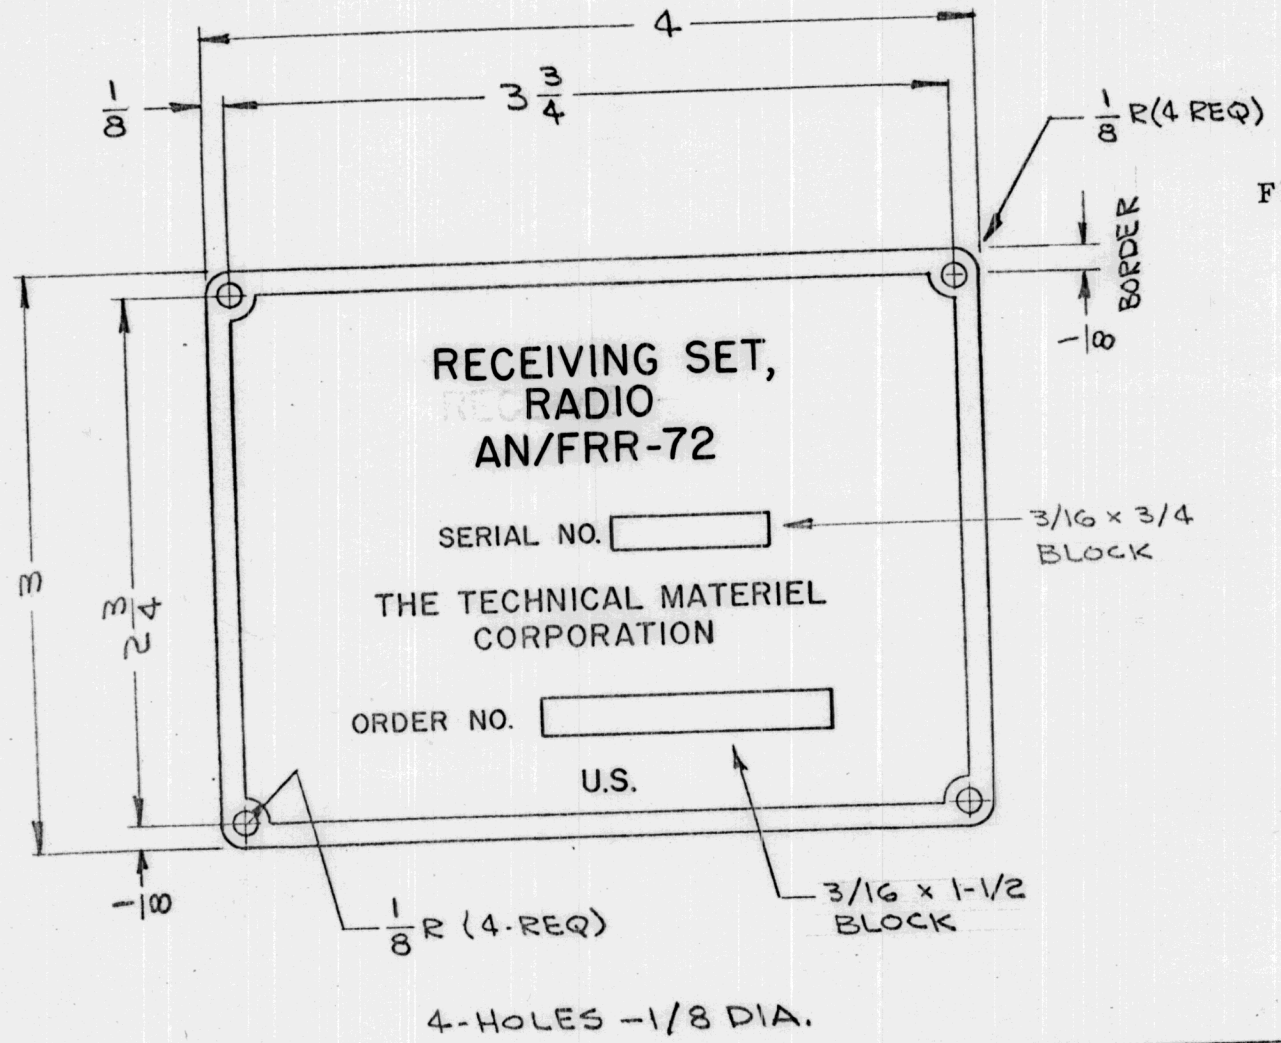

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

4-HOLES -1/8 DIA.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	92					THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	Spec							
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1								
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A						
							5052-H32	—	SEE NOTE		
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	NP660 Ø


REQ. PER UNIT	USED ON			NP661	Ø
	MODEL	ASS'Y. NO.	DATE		
1	SWR-1K		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

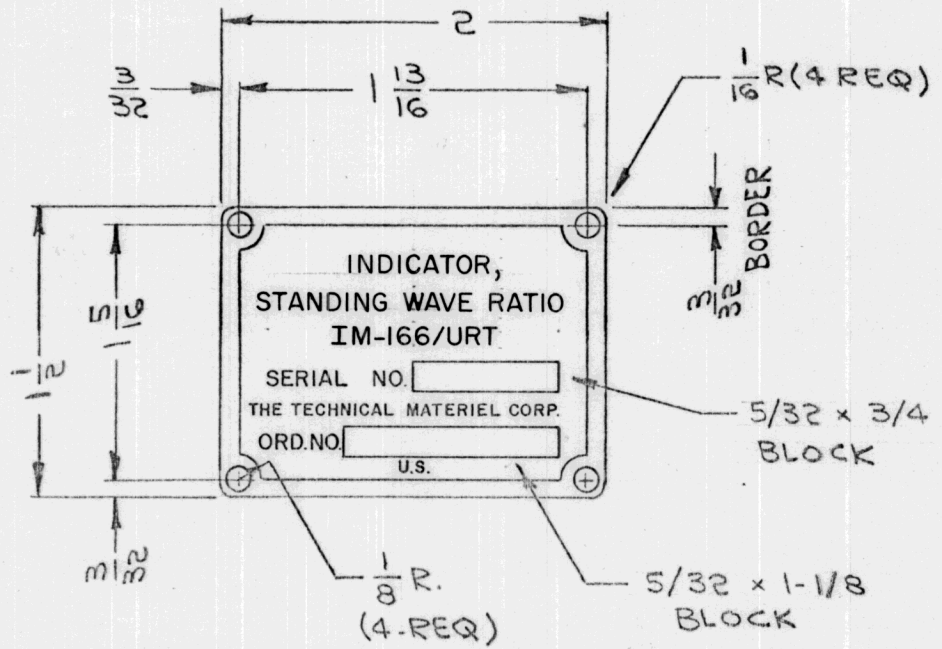

4 HOLES- 1/8 DIA.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	92			.032 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
X	EXPER. RELEASE	8.21.64	X	4	Sam		ALUMINUM		NAMEPLATE, IDENTIFICATION			
							MATERIAL					
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1					5052-H32		DRAWN	CHECKED	FINAL APPROVAL
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A				TYPE & TEMPER	HEAT TREAT. SPEC.	SEE NOTE		
	TOLERANCES						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	NP661	Ø


REQ. PER UNIT	USED ON			NP662	Ø
	MODEL	ASS'Y. NO.	DATE		
1	MFP-1		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.
 COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.


NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

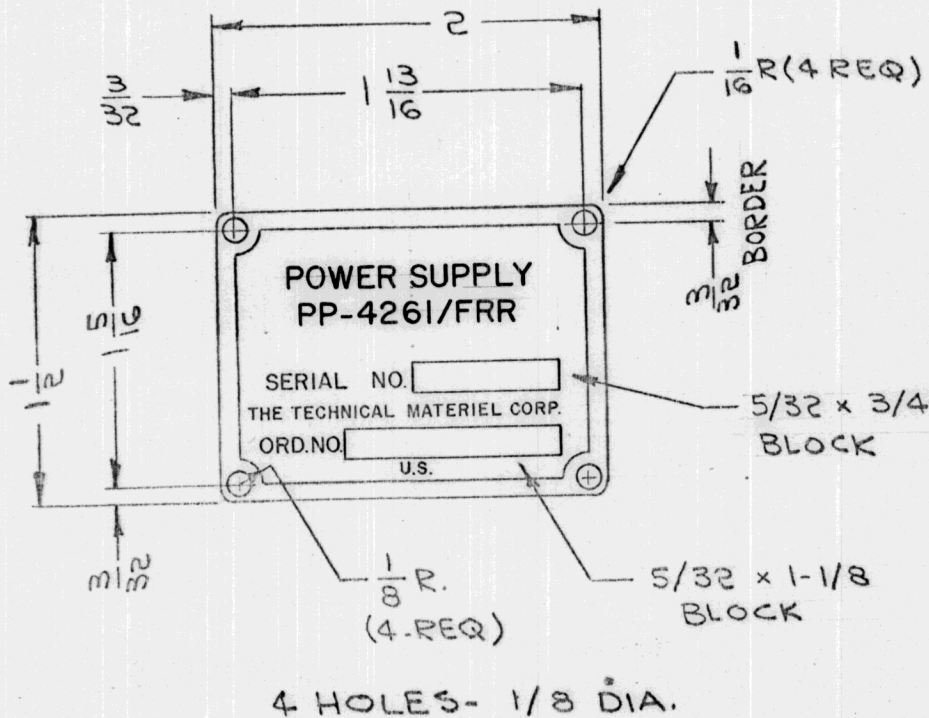

4 HOLES- 1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø		.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
X	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	J.F.			NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	G. S.				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1				
DECIMALS	FRACTIONS	CODE	MATERIAL					
.X ± .05	± 1/64	A	5052-H32	-4-	G. S.	W.D.		
.XX ± .01	ANGLES		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
.XXX ± .005	± 0° 30'		SEE NOTE				NP662	
	TOLERANCES		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		Ø	

REQ. PER UNIT	USED ON			NP663	Ø
	MODEL	ASS'Y. NO.	DATE		
1	DDR-5A/MSG-1		8-21-64		

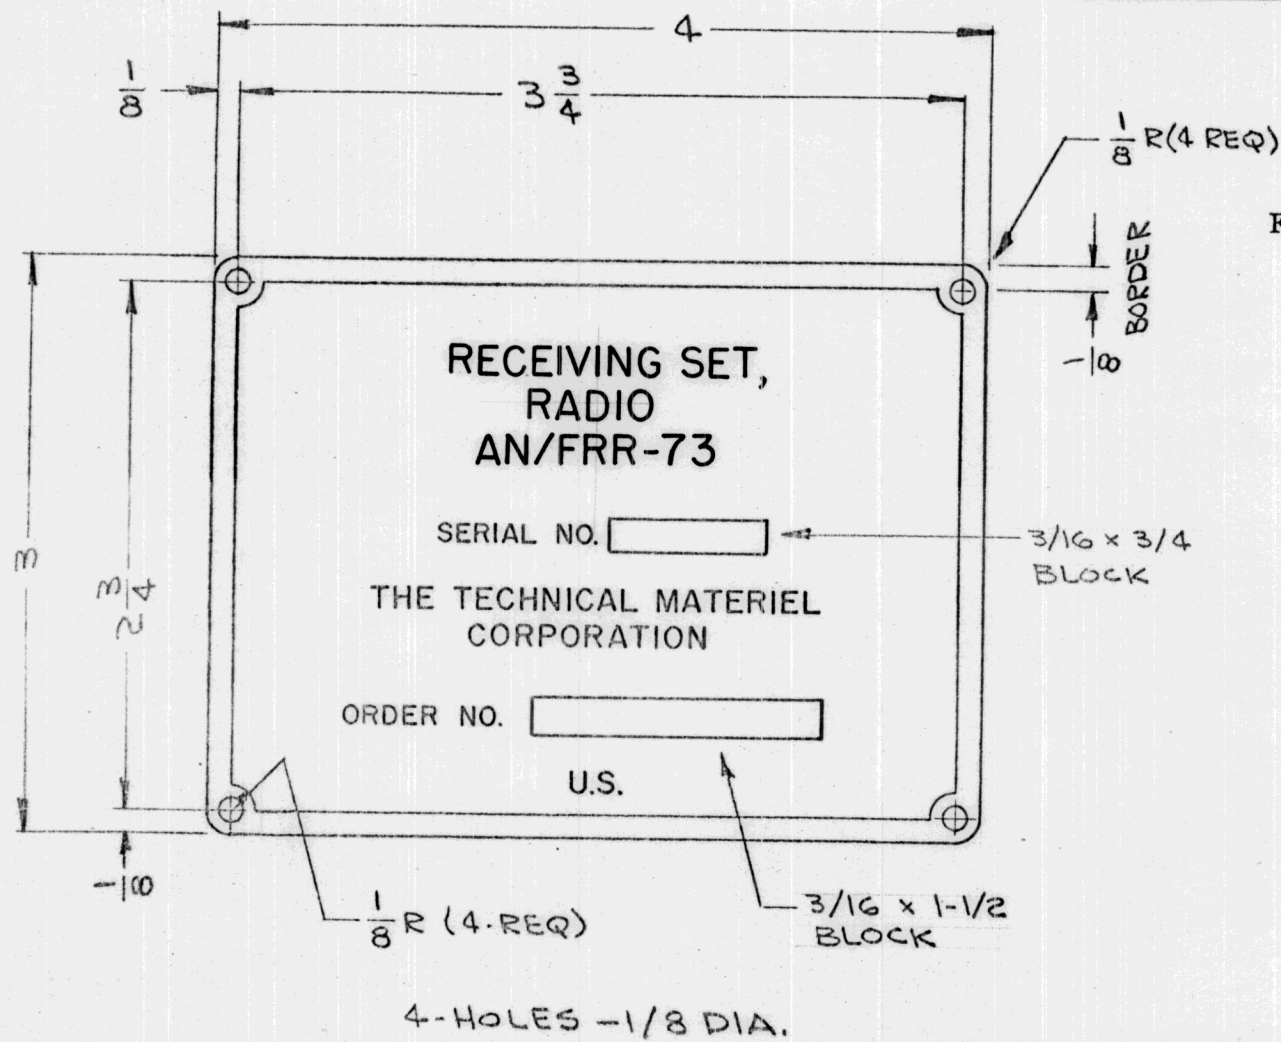

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

4-HOLES -1/8 DIA.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	ALUMINUM	NAMEPLATE, IDENTIFICATION	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A
5052-H32	HEAT TREAT. SPEC.	DRAWN	CHECKED
SEE NOTE	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			NP663 Ø


REQ. PER UNIT	USED ON			NP664	Ø
	MODEL	ASS'Y. NO.	DATE		
1	HFIR-1		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-
LESS BLACK BACKGROUND (TYPE 37038)
PER FED-STD-595.
COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE - 3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE
STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE
WITH MIL STD-130 AND MIL-M-13231
AND AMENDS.

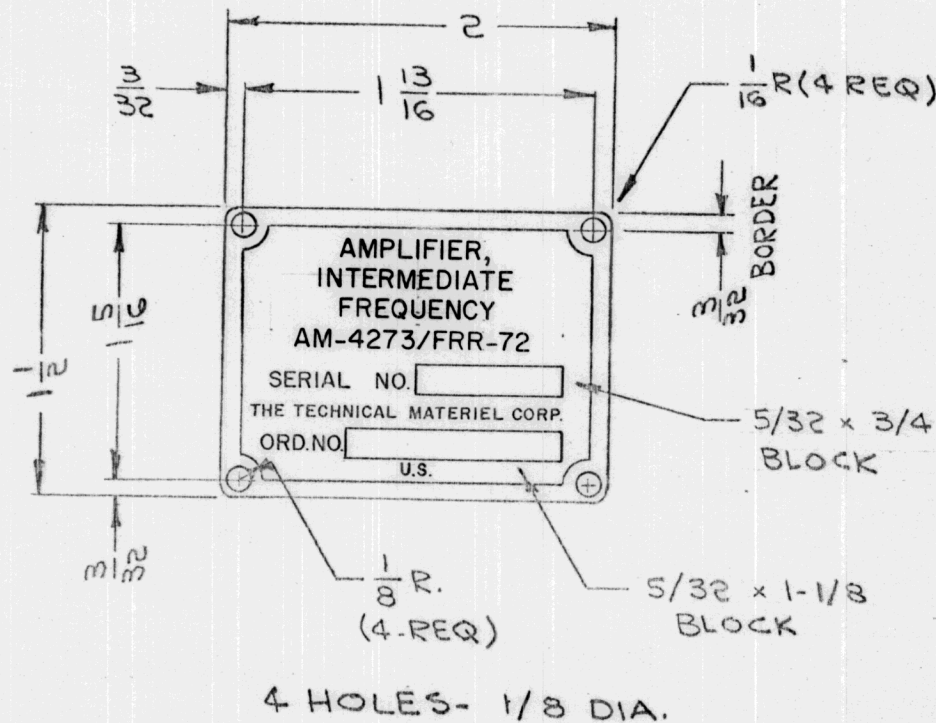

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	RL	.032 THK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	EXPER. RELEASE	8-21-64	X	SL	ALUMINUM		NAMEPLATE, IDENTIFICATION	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1				
DECIMALS	FRACTIONS	CODE	5052-H32					
.X ± .05	± 1/64	A	TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN	
.XX ± .01	ANGLES		SEE NOTE				CHECKED	
.XXX ± .005	± 0° 30'		FINISH & SPEC. NO.				FINAL APPROVAL	
			ELEC. DES. APP.		MECH. DES. APP.		NP664	


REQ. PER UNIT	USED ON			NP665	Ø
	MODEL	ASS'Y. NO.	DATE		
1	HFAR-1		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.
 COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

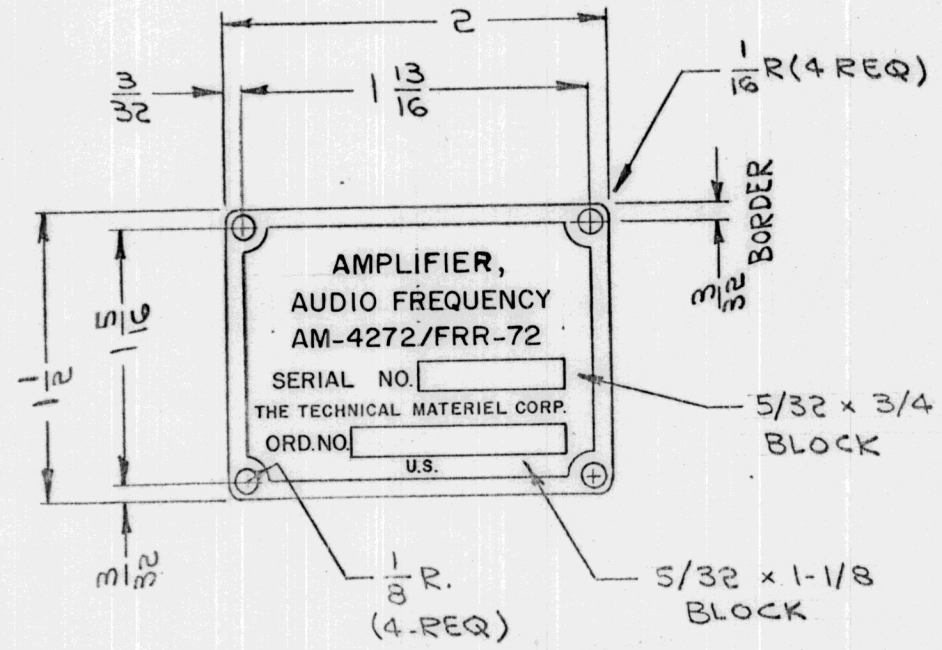

4 HOLES- 1/8 DIA.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	92			.032 THK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	EXPER. RELEASE	8-21-64	X	4 Jan			ALUMINUM		NAMEPLATE, IDENTIFICATION	
							MATERIAL			
							5052-H32	-4-	<i>[Signature]</i>	<i>[Signature]</i>
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
							SEE NOTE		FINAL APPROVAL	
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
									NP665 Ø	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS
 X ± .05
 XX ± .01
 XXX ± .005

TOLERANCES

FRACTIONS
 ± 1/64
 ANGLES
 ± 0° 30'

CODE
 A

SCALE
 1:1


REQ. PER UNIT	USED ON			NP666	Ø
	MODEL	ASS'Y. NO.	DATE		
1	HFRR-2		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.
 COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

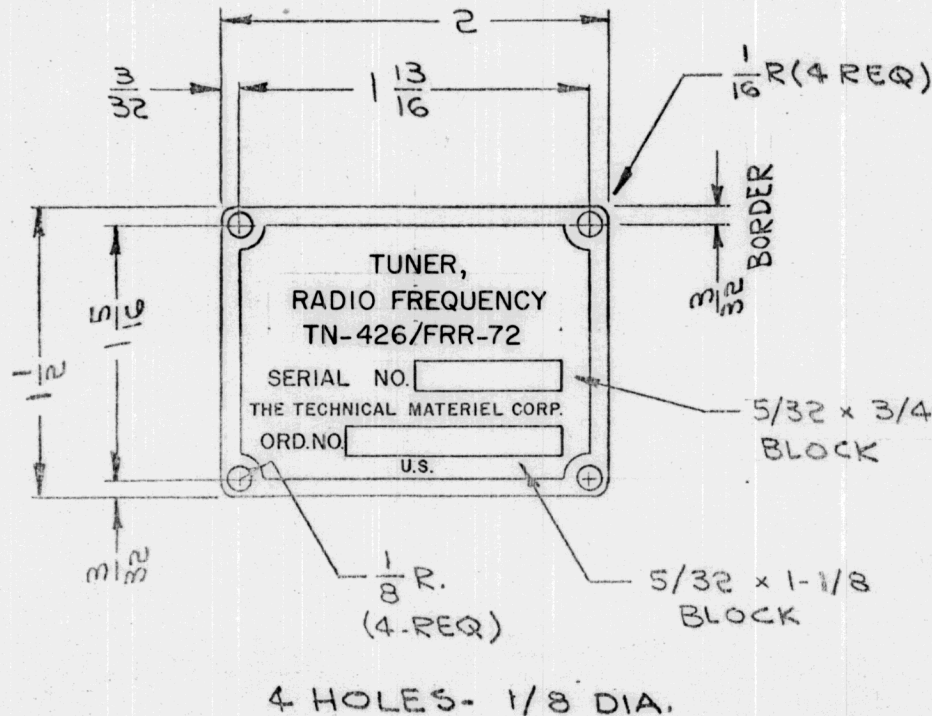

4 HOLES- 1/8 DIA.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	Ø 9.15.64	Ø 9.2.	Ø
X	8.21.64	X 8.21.64	X
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS X ± .05 XX ± .01 XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	TOLERANCES	CODE A
.032 THK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
ALUMINUM		NAMEPLATE, IDENTIFICATION	
MATERIAL		5052-H32	
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN
SEE NOTE		CHECKED	
FINISH & SPEC. NO.		FINAL APPROVAL	
		NP666	


REQ. PER UNIT	USED ON			NP668	Ø
	MODEL	ASS'Y. NO.	DATE		
1	MPS-1		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE - 3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.


NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

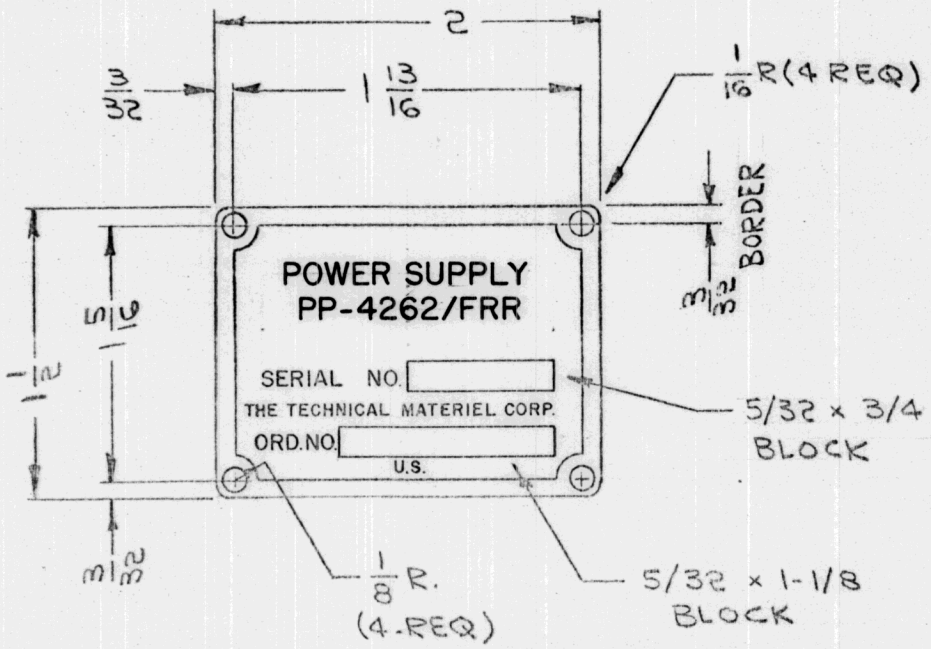

4 HOLES - 1/8 DIA.

REQ.	ITEM	PART NO.				DESCRIPTION			SYMBOL
Ø		.032 THK				THE TECHNICAL MATERIEL CORP.			Ø
		STOCK SIZE				MAMARONECK, NEW YORK			
X	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	9F.	ALUMINUM				NAMEPLATE, IDENTIFICATION
	EXPER. RELEASE	8.21.64	X	9F.	MATERIAL				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1					
DECIMALS	TOLERANCES	FRACTIONS	CODE	5052-H32					
.X ± .05		± 1/64	A	TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
.XX ± .01		ANGLES		SEE NOTE					
.XXX ± .005		± 0° 30'		FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.	NP668 Ø

REQ. PER UNIT	USED ON			NP669	Ø
	MODEL	ASS'Y. NO.	DATE		
1	MSA-1		8-21-64		

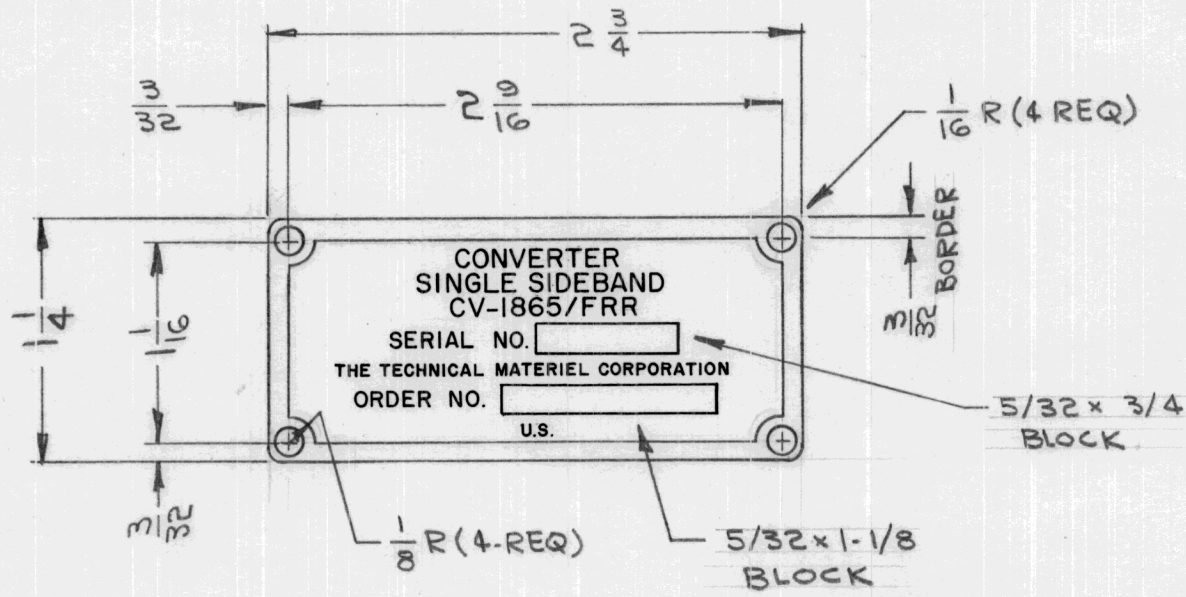

FINISH: REVERSE ETCH ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595 COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	ALUMINUM	NAMEPLATE, IDENTIFICATION	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS	FRACTIONS	CODE	
.X ± .05	± 1/64	A	
.XX ± .01	ANGLES		
.XXX ± .005	± 0° 30'		
5052-H32		DRAWN	CHECKED
TYPE & TEMPER		HEAT TREAT. SPEC.	FINAL APPROVAL
SEE NOTE			
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
			NP669 Ø


REQ. PER UNIT	USED ON			NP670	Ø
	MODEL	ASS'Y. NO.	DATE		
1	MCG-1		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.


NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

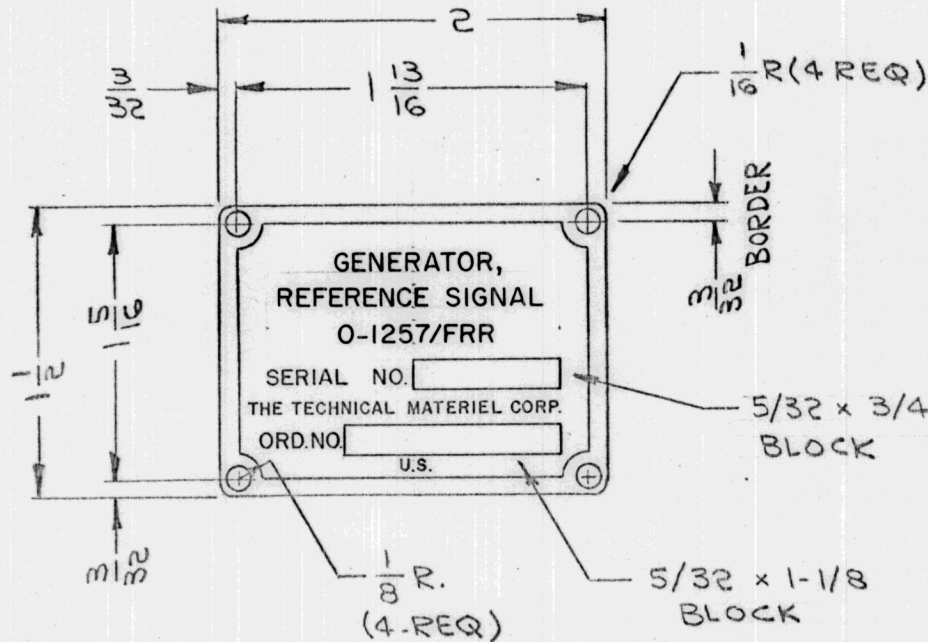

4 HOLES- 1/8 DIA.

REQ.	ITEM	PART NO.				DESCRIPTION			SYMBOL
Ø		.032 THK				THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE				MAMARONECK. NEW YORK			
X	EXPER. RELEASE	ALUMINUM				NAMEPLATE, IDENTIFICATION			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			
UNLESS OTHERWISE SPECIFIED		SCALE							
DIMENSIONS ARE IN INCHES AND INCLUDE		1:1							
CHEMICALLY APPLIED OR PLATED FINISHES									
DECIMALS	FRACTIONS	CODE							
.X ± .05	± 1/64	A							
.XX ± .01	ANGLES								
.XXX ± .005	± 0° 30'								
TOLERANCES									
		5052-H32		—		DRAWN		CHECKED	
		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED	
		SEE NOTE						FINAL APPROVAL	
		FINISH & SPEC. NO.				ELEC. DES. APP.		MECH. DES. APP.	
								NP670	
								Ø	

REQ. PER UNIT	USED ON		NP671	A
	MODEL	ASS'Y. NO.		
1	GPT-200KA		8-21-64	

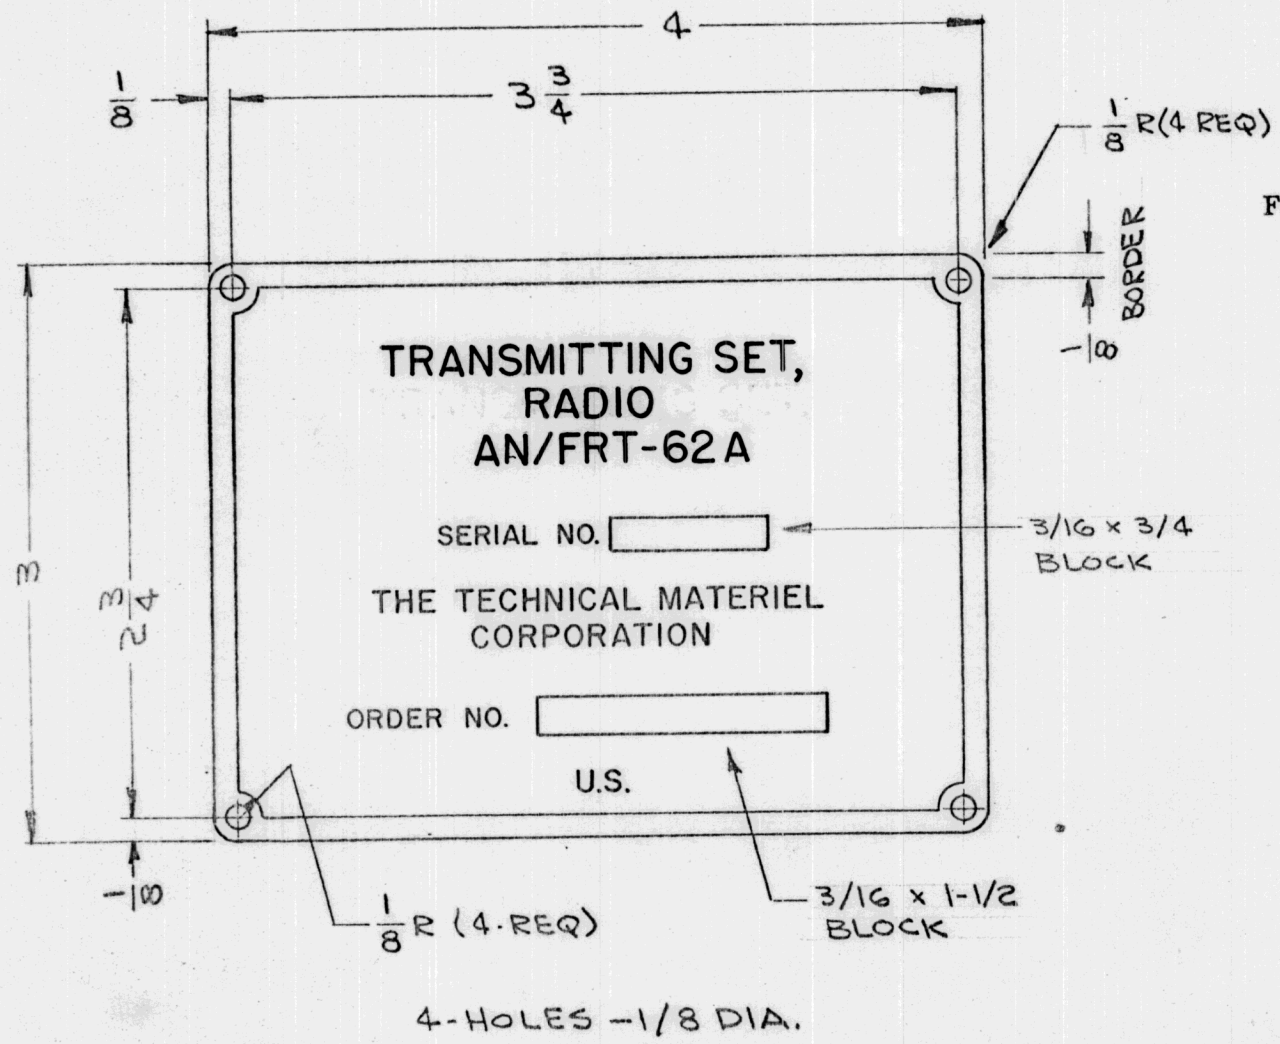

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894


MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
A	AN/FRT-62A WAS AN/FRT-62	11.10.64 12894	bb [Signature]
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	g.p.
X	EXPER. RELEASE	8-21-64 X	[Signature]
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS	FRACTIONS	CODE	
.X ± .05	± 1/64	A	
.XX ± .01	ANGLES		
.XXX ± .005	± 0° 30'		
	5052-H32	[Signature]	[Signature]
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN CHECKED FINAL APPROVAL
	SEE NOTE		
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			NP671 A

REQ. PER UNIT	USED ON			NP672	Ø
	MODEL	ASS'Y. NO.	DATE		
1	MSG-1		8-21-64		

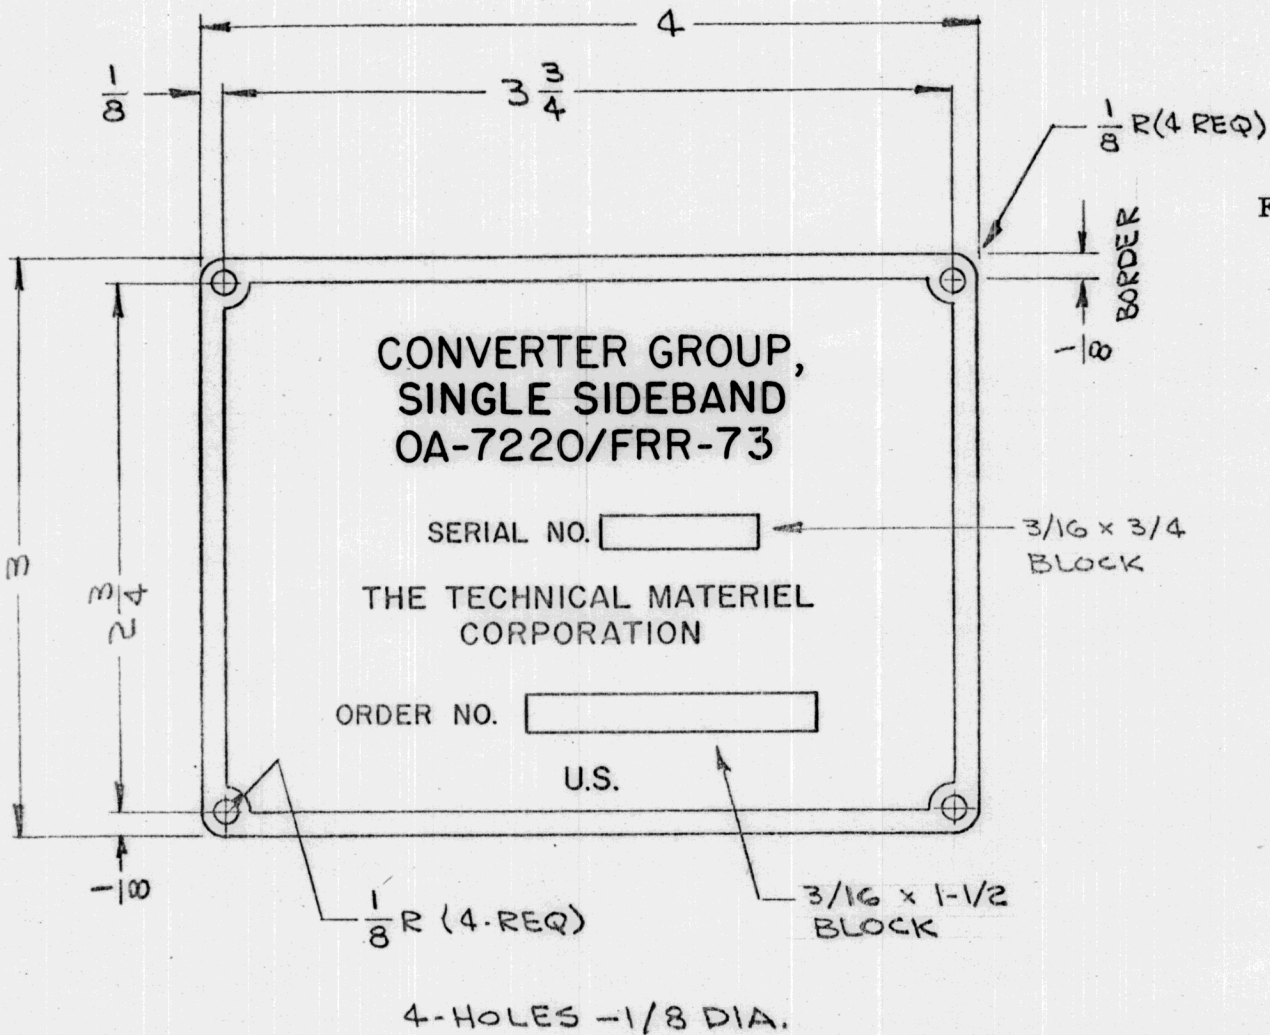

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH
ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS (REF: SIGNAL CORPS)

4-HOLES -1/8 DIA.

REQ.	ITEM	PART NO.				DESCRIPTION			SYMBOL	
Ø		.032 THK STOCK SIZE				THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
X		ALUMINUM				NAMEPLATE, IDENTIFICATION				
SYM		MATERIAL								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				5052-H32		<i>G. L...</i>	<i>...</i>	<i>...</i>
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
TOLERANCES						SEE NOTE				
						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	NP672 Ø

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	RAK-11		8-21-64


NP673 \emptyset

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

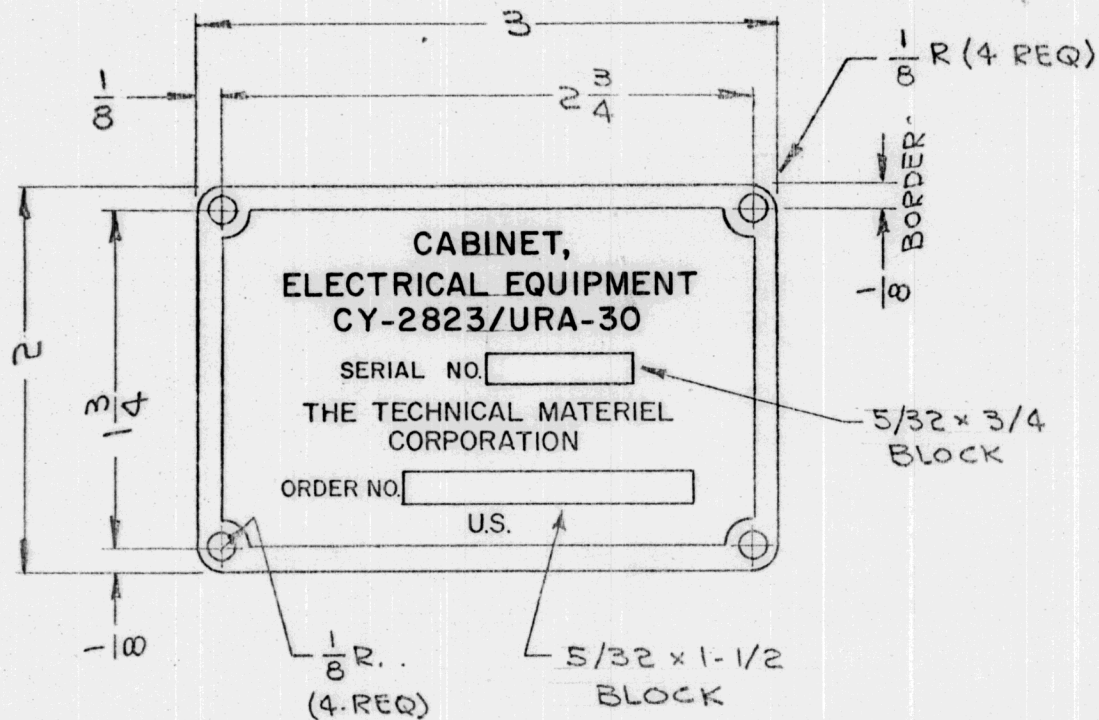

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

4 HOLES - 1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	\emptyset	9 L.	NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	9 spec.		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1		
		5052-H32			<i>E. J. Lucas</i>	<i>EDD</i>
		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
		SEE NOTE				
		FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	TOLERANCES	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE A	NP673 \emptyset		


REQ. PER UNIT	USED ON			NP674	Ø
	MODEL	ASS'Y. NO.	DATE		
1	ATS-MCU-2		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.
COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE - 3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

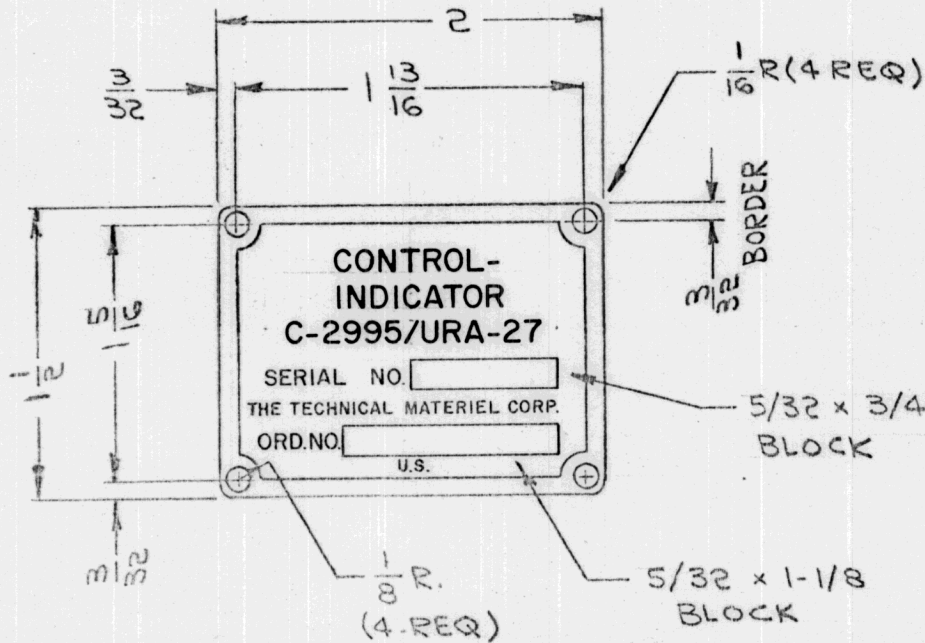

4 HOLES - 1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø		.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
X	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	9L			NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	9L				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1				
DECIMALS X ± .05 .XX ± .01 XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE A		
5052-H32		HEAT TREAT. SPEC.		DRAWN		CHECKED	FINAL APPROVAL	
SEE NOTE		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.	NP674 Ø	


REQ. PER UNIT	USED ON			NP675	Ø
	MODEL	ASS'Y. NO.	DATE		
1	ATS-50-TU-2		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE - 3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

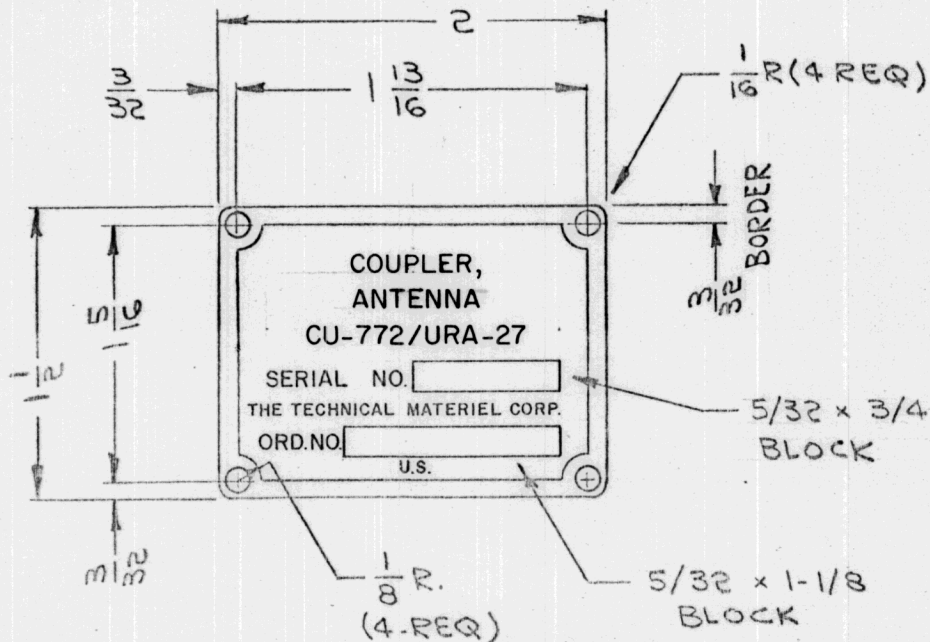

4 HOLES - 1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
Ø		.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
X	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	g.r.			
X	EXPER. RELEASE	8-21-64	X	G. Sear			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1				
DECIMALS	FRACTIONS	CODE					
.X ± .05	± 1/64	A					
.XX ± .01	ANGLES						
.XXX ± .005	± 0° 30'						
TOLERANCES							
MATERIAL		5052-H32	— y —		DRAWN	CHECKED	FINAL APPROVAL
TYPE & TEMPER		HEAT TREAT. SPEC.					
SEE NOTE							
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	NP675			


REQ. PER UNIT	USED ON			NP676	Ø
	MODEL	ASS'Y. NO.	DATE		
1	ATS-50-CU-2		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

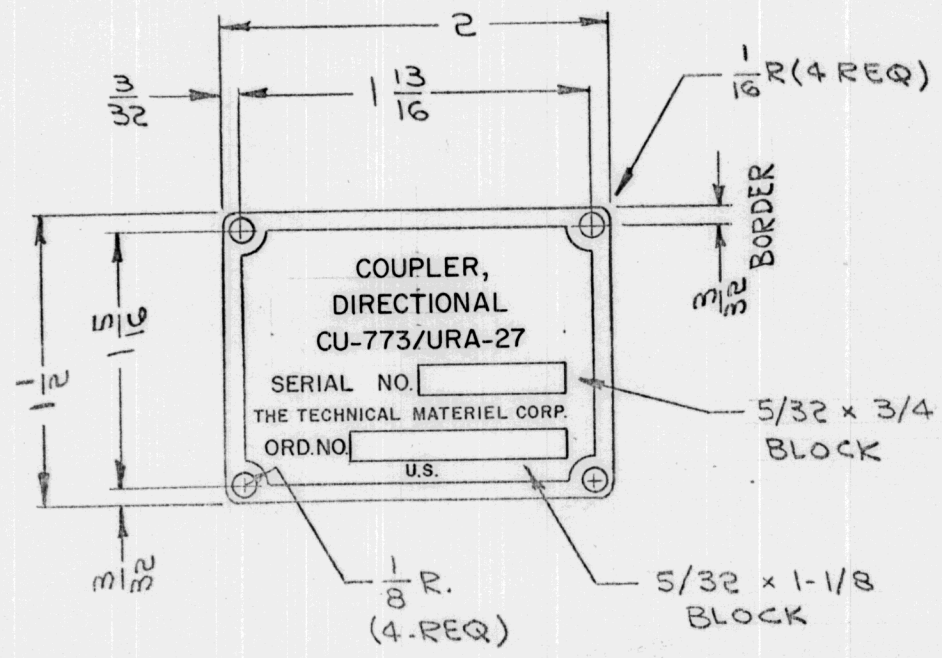

4 HOLES- 1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK, NEW YORK				
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	92			NAMEPLATE, IDENTIFICATION
X	EXPER. RELEASE	8-21-64	X	4 Jan			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1				
DECIMALS	FRACTIONS	CODE					
X ± .03	± 1/64	A					
XX ± .01	ANGLES						
XXX ± .005	± 0° 30'						
TOLERANCES							
			5052-H32	— 4 —	Q Juan	egg	FINAL APPROVAL
			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	
			SEE NOTE				
			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		
							NP676 Ø


REQ. PER UNIT	USED ON			NP677	Ø
	MODEL	ASS'Y. NO.	DATE		
1	ATS-50-2		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.
COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

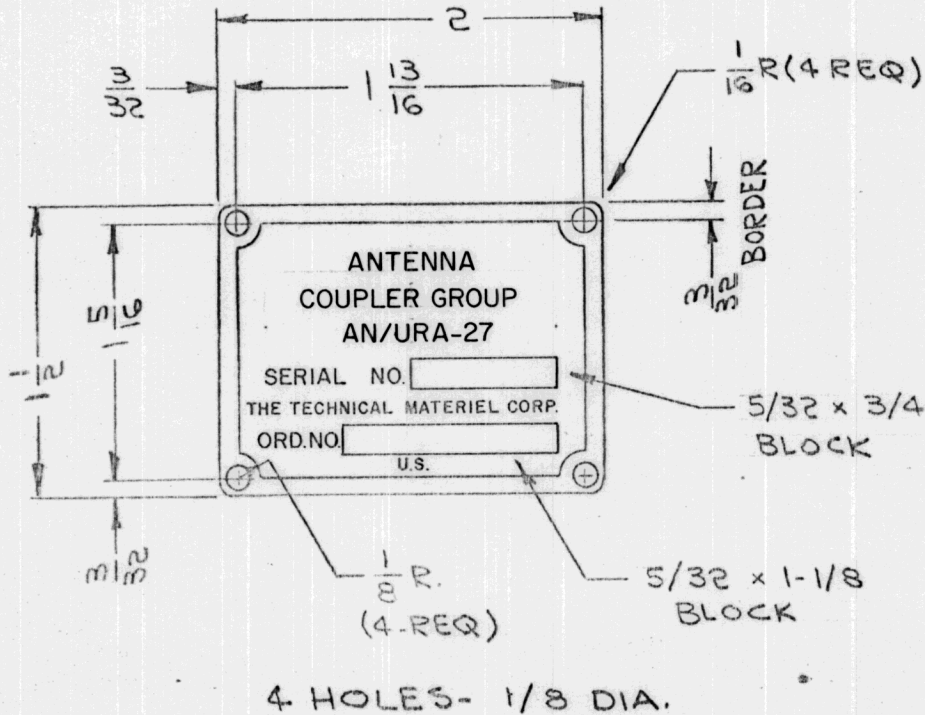

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø		.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
X	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	D.L.			NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	G. Swan				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A			
5052-H32		— y —	DRAWN		CHECKED		FINAL APPROVAL	
SEE NOTE		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		
						NP677 Ø		


REQ. PER UNIT	USED ON			NP678	Ø
	MODEL	ASS'Y. NO.	DATE		
1	DVM-4		8-21-64		

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

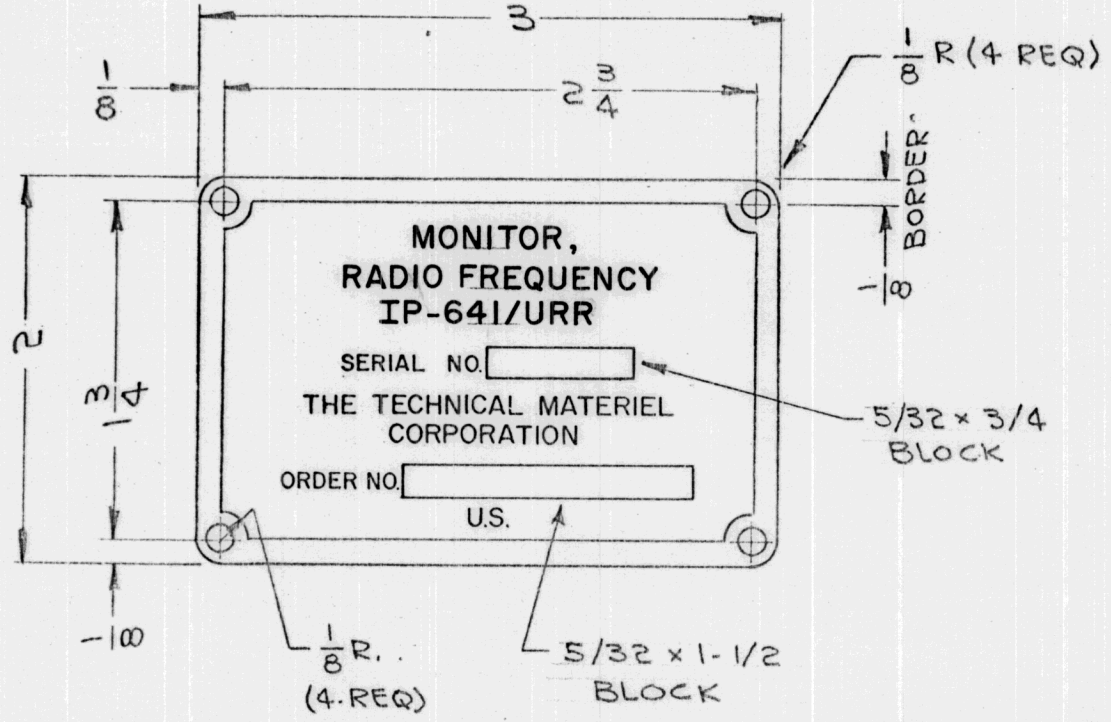

4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.				DESCRIPTION		SYMBOL
Ø		.032 THK				THE TECHNICAL MATERIEL CORP.		
		STOCK SIZE				MAMARONECK, NEW YORK		
X	EXPER. RELEASE	8-21-64	X	9.2	ALUMINUM		NAMEPLATE, IDENTIFICATION	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1		5052-H32		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		TYPE & TEMPER		HEAT TREAT. SPEC.
CODE A		DRAWN		CHECKED		FINAL APPROVAL		
SEE NOTE		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		
		NP678		Ø				


REQ. PER UNIT	USED ON			NP679	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RAK-20		8-21-64		

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

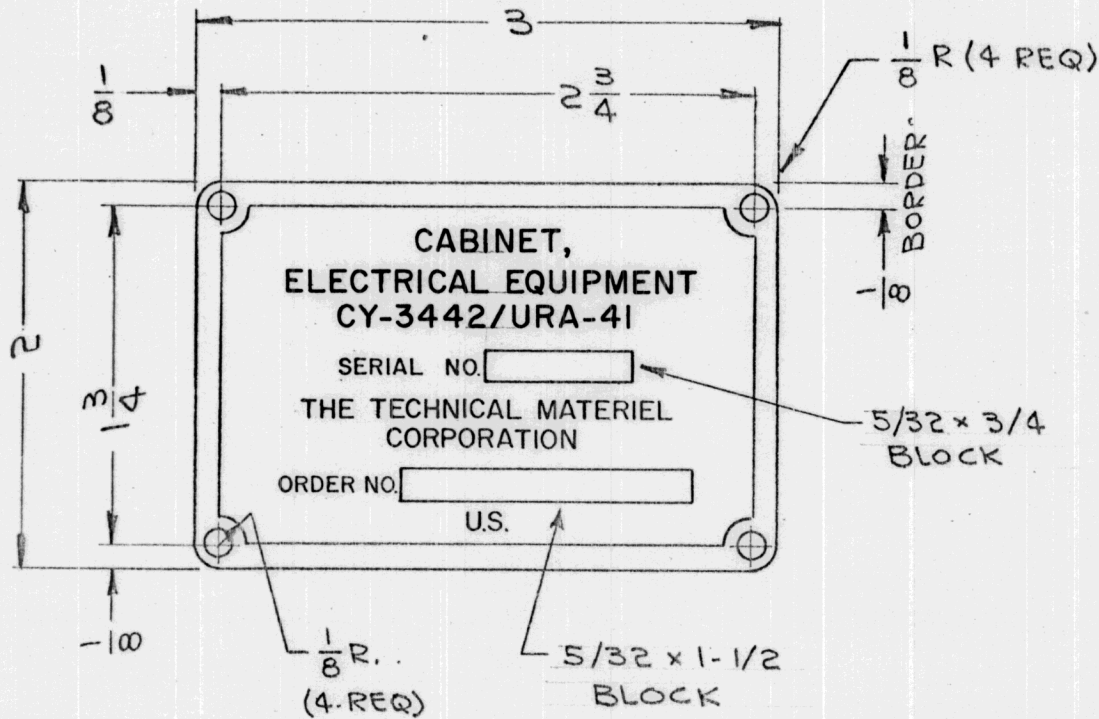

4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)


REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
Ø			ORIGINAL RELEASE FOR PRODUCTION				
			9-15-64	Ø	4L		
X			8-21-64	X	9 spec		
SYM	DESCRIPTION		DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE 1:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A	
				5052-H32		—4	
				ALUMINUM.		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
				.032 THK STOCK SIZE		NAMEPLATE, IDENTIFICATION	
				MATERIAL			
				TYPE & TEMPER		HEAT TREAT. SPEC.	
				DRAWN		CHECKED	
				SEE NOTE		FINAL APPROVAL	
				FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.	
						NP679 Ø	

REQ. PER UNIT	USED ON			NP680	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RAK-35		8-21-64		

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894 MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

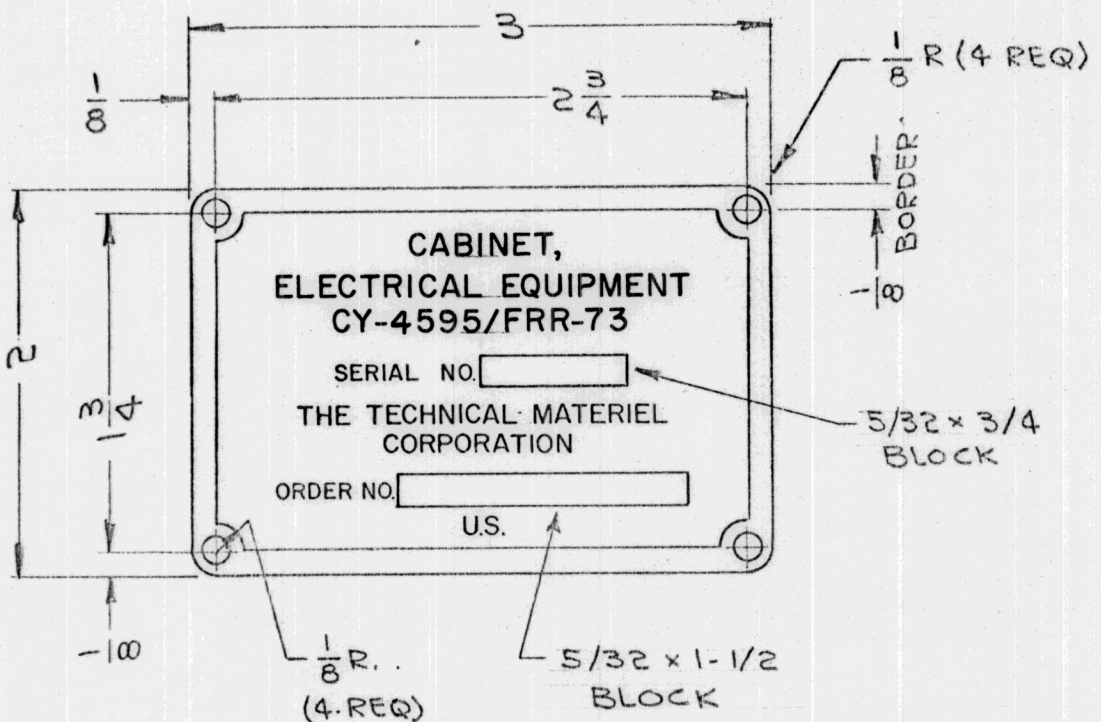


4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	92	NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	92		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
		1:1				
		5052-H32			<i>G. Luciani</i>	<i>ead</i>
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN		CHECKED
		SEE NOTE				
		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.
						NP680
						Ø

REQ. PER UNIT	USED ON			NP681	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RAK-17		8-21-64		

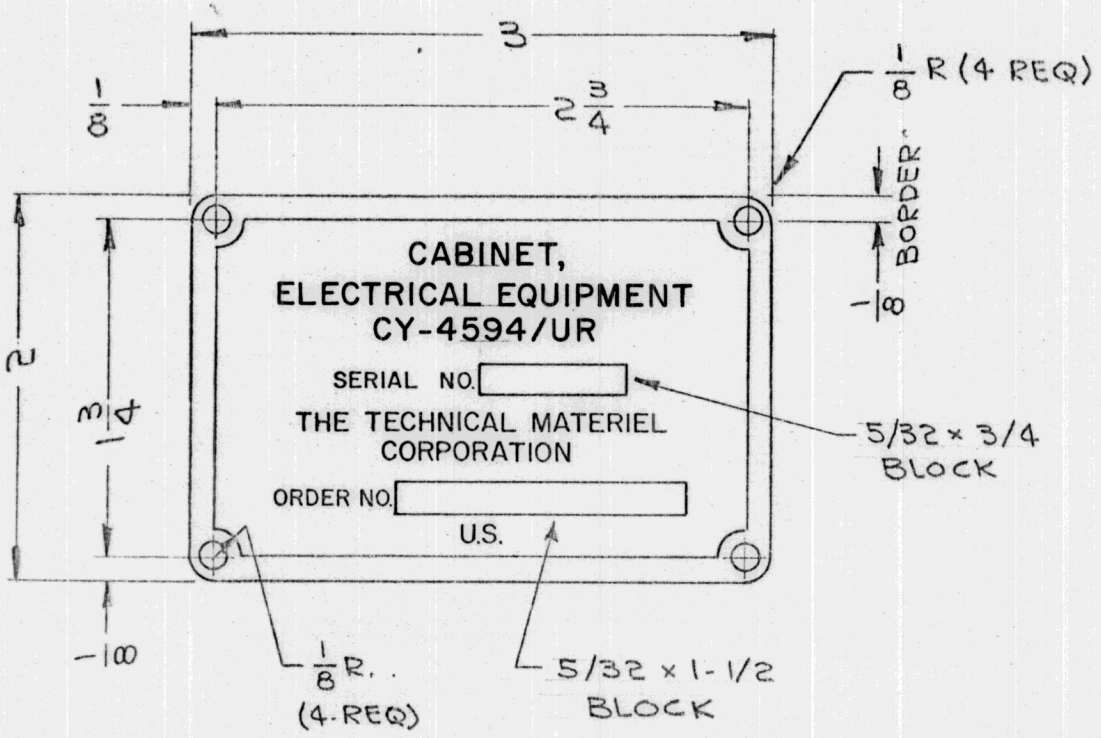

4 HOLES - 1/8 DIA.

FINISH: REVERSE ETCH, ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.


COLORLESS VARNISH PER MIL-V-6894 MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	2L	.032 THK STOCK SIZE	
X	EXPER. RELEASE	8-21-64	X	4 spec	ALUMINUM	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE	5052-H32		
			1:1	-4		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES	
CODE			A		SEE NOTE	
TYPE & TEMPER			HEAT TREAT. SPEC.		FINISH & SPEC. NO.	
DRAWN			CHECKED		ELEC. DES. APP.	
FINAL APPROVAL			DRAWN		MECH. DES. APP.	
NP681			Ø			

REQ. PER UNIT 1	USED ON		NP682	Ø
	MODEL SBT-1KF	ASS'Y. NO.		

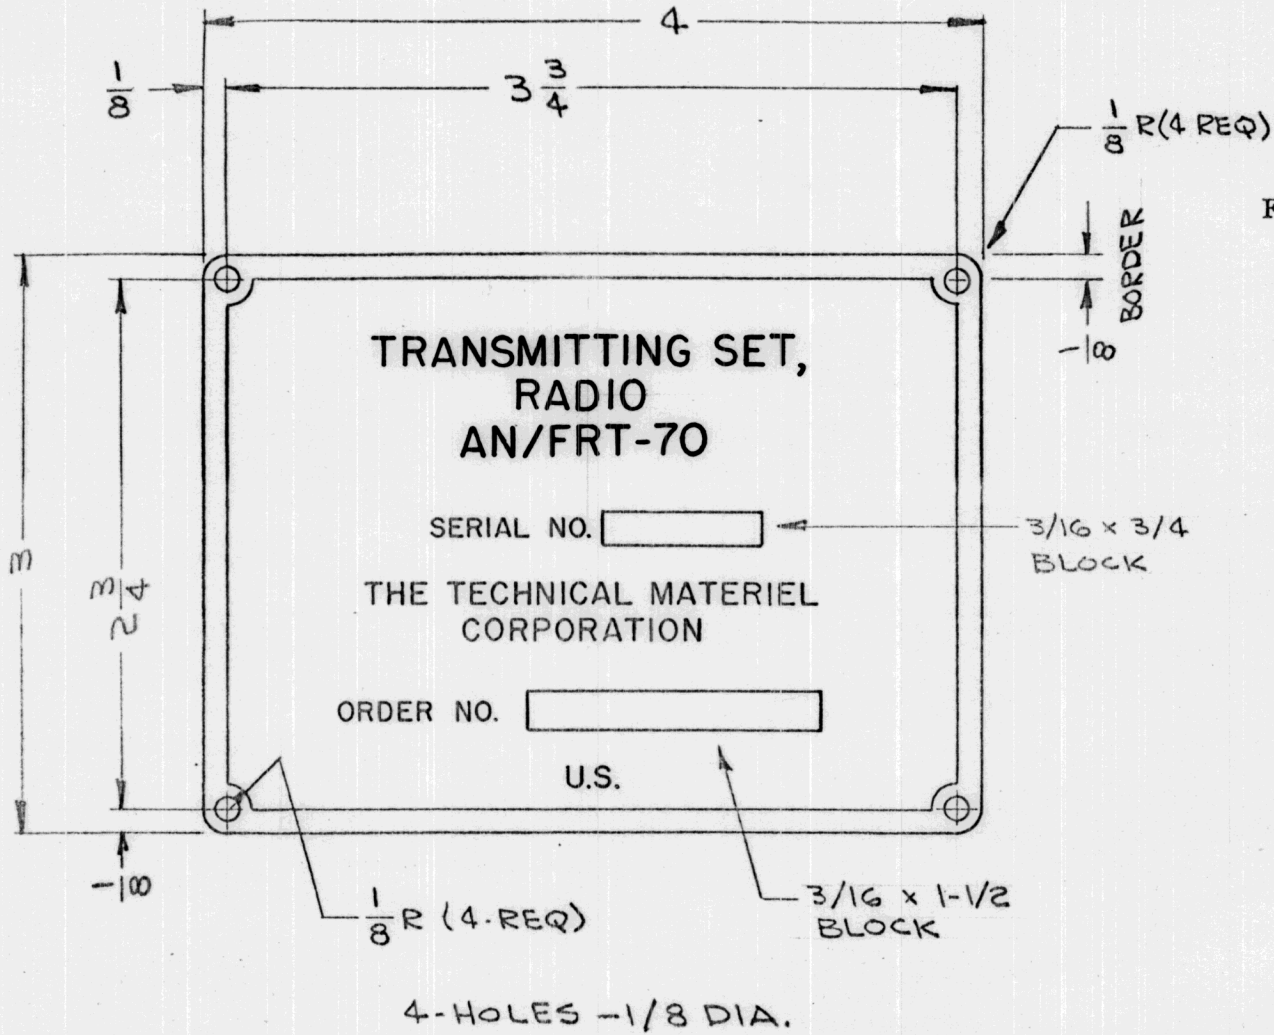

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	ALUMINUM	NAMEPLATE, IDENTIFICATION	
SYM	MATERIAL		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A
	5052-H32	DRAWN <i>J. Lucas</i>	CHECKED <i>COO</i>
	SEE NOTE	HEAT TREAT. SPEC.	FINAL APPROVAL <i>NP682</i>
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.


REQ. PER UNIT	USED ON			NP683	Ø
	MODEL	ASS'Y. NO.	DATE		
1	SBG-1La		8-21-64		

FINISH: REVERSE ETCH, ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

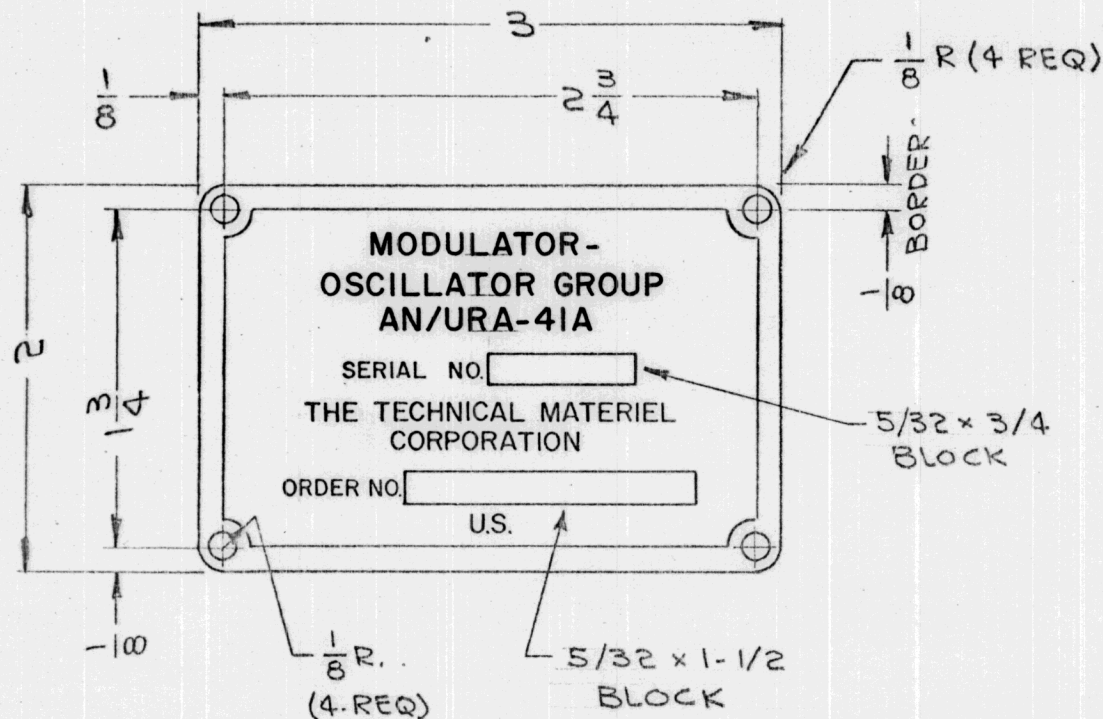


4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
Ø			.032 THK STOCK SIZE			THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK
X	EXPER. RELEASE	8-21-64	X	9/2		NAMEPLATE, IDENTIFICATION
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES	CODE	A		
FRACTIONS ± 1/64 ANGLES ± 0° 30'						
5052-H32		—4	By Lucas	edd	FINAL APPROVAL	
TYPE & TEMPER		HEAT TREAT. SPEC.				
SEE NOTE						NP683
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		Ø	

REQ. PER UNIT	USED ON			NP 684	A
	MODEL	ASS'Y. NO.	DATE		
1	TER-100K/50				

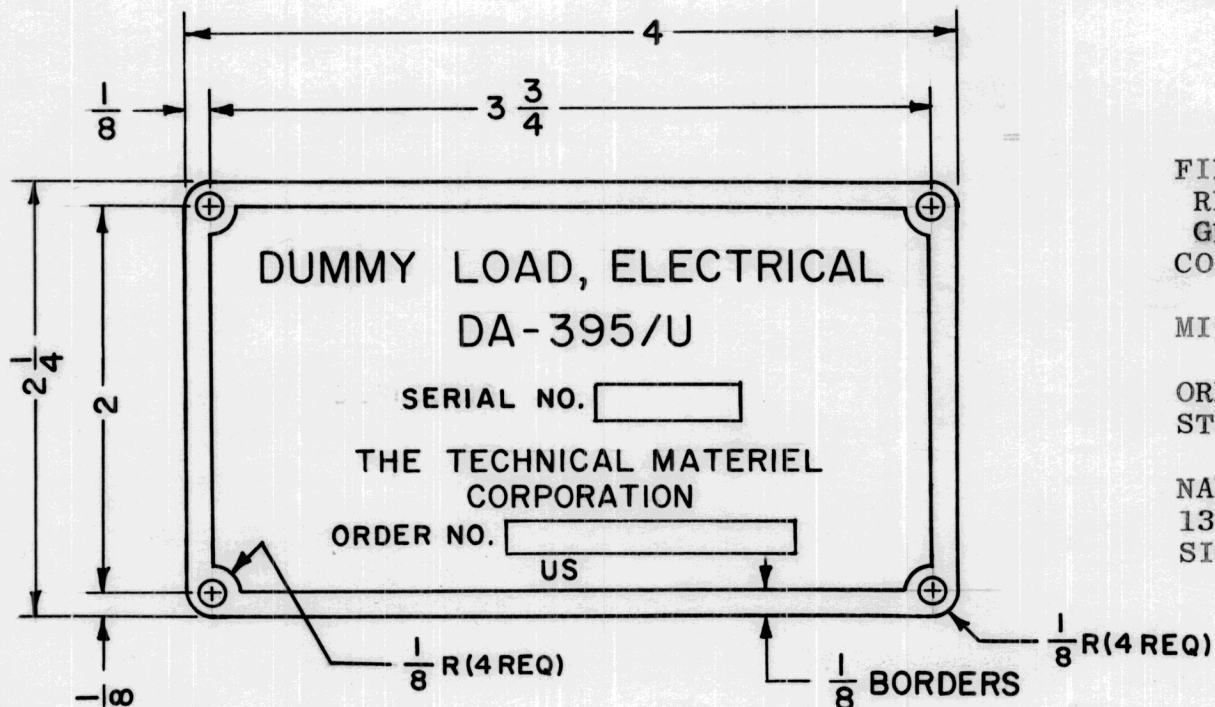

FINISH:

REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894.

MINIMUM LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS (REF: SIGNAL CORPS).

SERIAL NO. BLOCK: 3/16 X 3/4
 ORDER NO. BLOCK: 3/16 X 1 1/2
 4 HOLES - 1/8 DIA

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		0.032 THK	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK, NEW YORK				
		ALUMINUM	NAMEPLATE, IDENTIFICATION				
		MATERIAL	TMC MODEL TER-100K/50U				
A	REVISED & REDRAWN	1.8.65	13233	JTB	@	ees	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A	
SEE NOTE		5052 H32	HEAT TREAT. SPEC.		DRAWN	CHECKED	
FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.			
						NP684	A


REQ. PER UNIT	USED ON			NP696	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RTRS-1		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.


NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

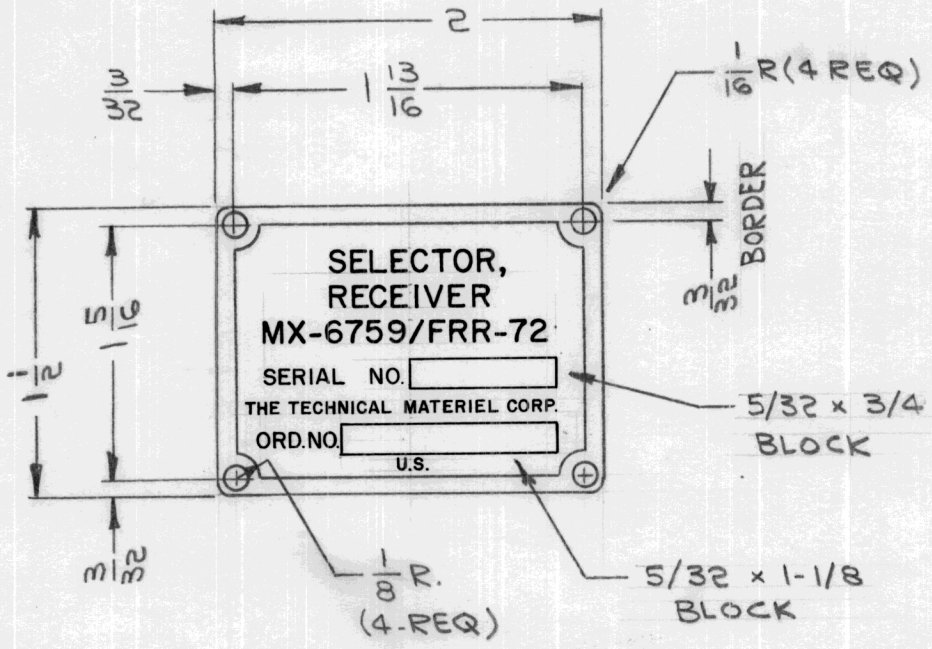

4 HOLES- 1/8 DIA.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE		
Ø ORIGINAL RELEASE FOR PRODUCTION	9-15-64	NAMEPLATE, IDENTIFICATION	
X EXPER. RELEASE	8-21-64		
	ALUMINUM		
	MATERIAL		
	5052-H32		
	TYPE & TEMPER	DRAWN	CHECKED
	HEAT TREAT. SPEC.	FINAL APPROVAL	
	SEE NOTE		
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
		NP696 Ø	

REQ. PER UNIT	USED ON			NP697 Ø
	MODEL	ASS'Y. NO.	DATE	
1	RTPA-1		9-9-64	

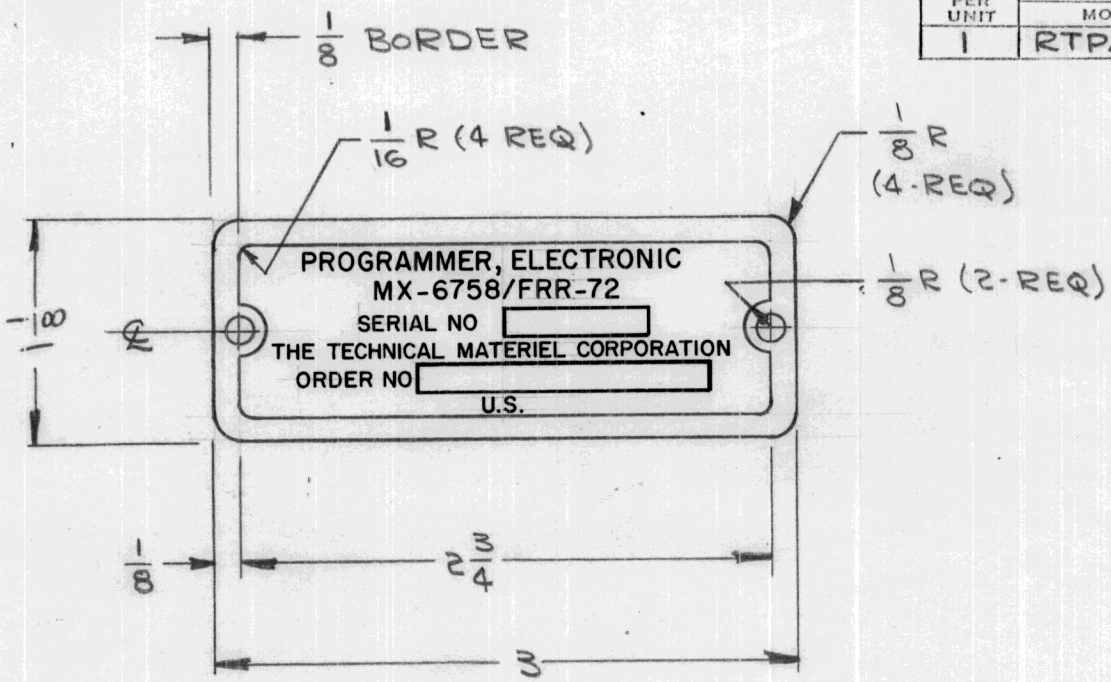

FINISH: REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE 3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL ATAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD.-130 AND MIL-M-13231 AND AMENDS. (REF: SINGLE CORPS)

SERIAL NO. BLOCK-5/32 x 3/4
 ORDER NO. BLOCK-5/32 x 1-1/2
 2 HOLES - 1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.032	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
		STOCK SIZE	NAMEPLATE, IDENTIFICATION				
		ALUMINUM					
		MATERIAL					
		5052-H32					
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
		SEE NOTE					
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP697 Ø		
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-10-64	Ø	JL			
XI	COMPLETELY REDESIGNED	9-9-64	XI	JL			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A				


REQ. PER UNIT	USED ON			NP698	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RTKY-1		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

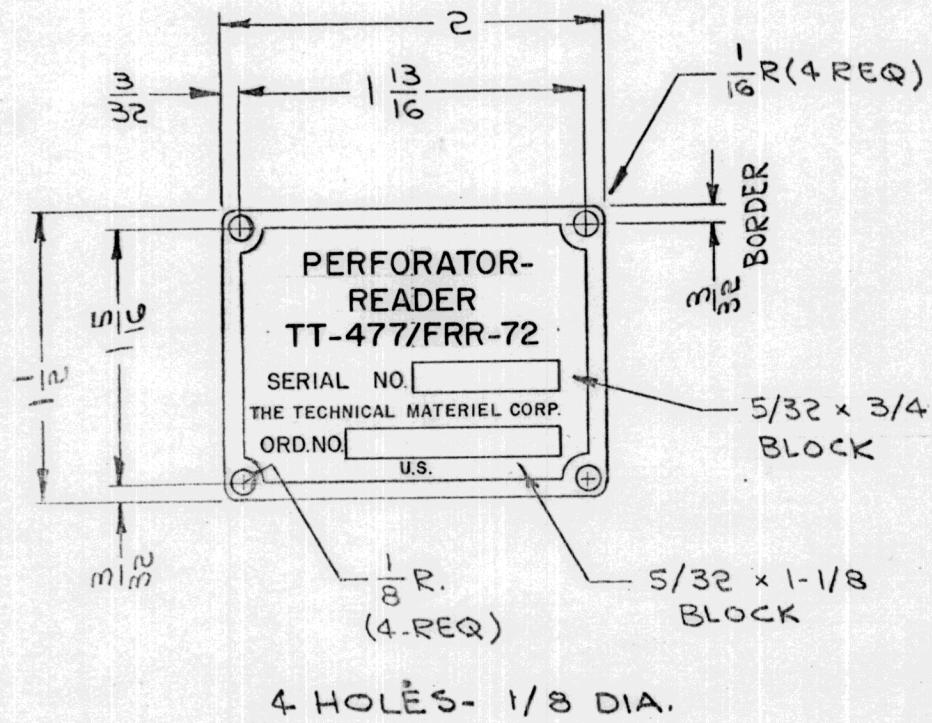

4 HOLES - 1/8 DIA.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	Ø	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	Ø
X	X	NAMEPLATE, IDENTIFICATION	Ø
SYMBOL	DESCRIPTION	DATE	CH. NO.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	TOLERANCES	CODE A
5052-H32	—	DRAWN	CHECKED
SEE NOTE	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
Ø	Ø	NP698	Ø


REQ. PER UNIT	USED ON			NP699	Ø
	MODEL	ASS'Y. NO.	DATE		
1	HSS-3		8-21-64		

FINISH: REVERSE ETCH ANODIZE ON LUSTER - LESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

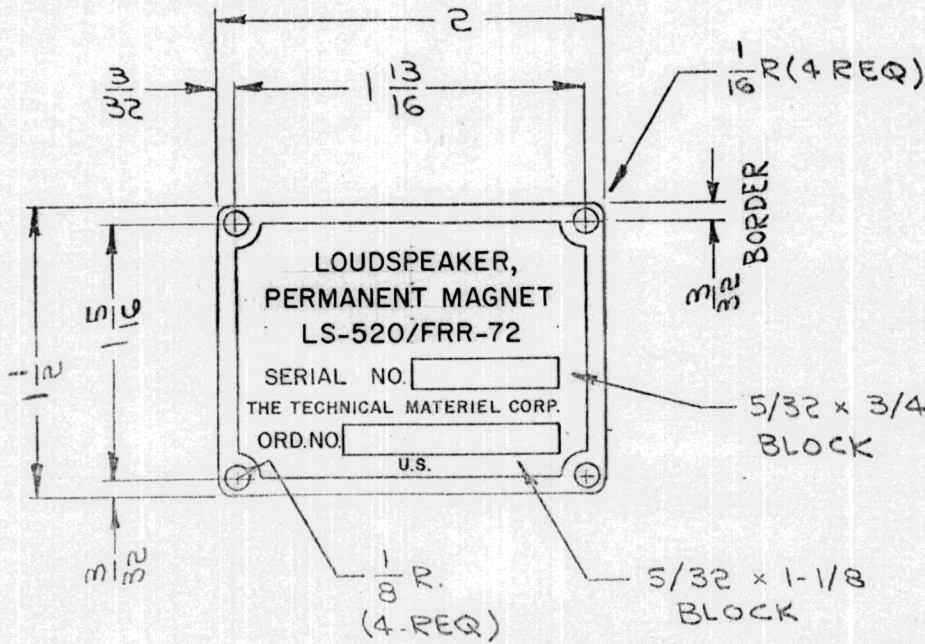

4 HOLES- 1/8 DIA.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø		.032 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
X	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	JL			NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	8-21-64	X	JL				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1					
DECIMALS	TOLERANCES	FRACTIONS	CODE					
X ± .05		± 1/64	A					
XX ± .01		ANGLES						
XXX ± .005		± 0° 30'						
				5052-H32	— 4 —	JL	OOD	h RJC
				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
				SEE NOTE				
				FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP699	Ø